



DCBL/ENV/MoEFCC/COMPL/MINES/NARANDA/052024/01

Date: 14.05.2024

To.

The Additional Principal Chief Conservator of Forests

Ministry of Environment, Forest & Climate Change, Regional Office (West Central Zone), Ground Floor, East Wing, New Secretariat Building, Civil Lines, Nagpur - 440001.

Sub: Half Yearly Compliance of Environmental Clearance issued for our Naranda Limestone Mine (ML area 71.01 Ha and production of 2.4 MTPA) at village Naranda, in Korpana Mandal, in Chandrapur Distt., in Maharashtra for the period of October-23 to March-24.

Ref: Environmental Clearance F. No. - J-11015/380/2007 -IA II (M), Date: 12.12.2008

Dear Sir.

With respect to the subject referred above, we are submitting herewith the point wise half yearly compliance of above referred Environmental Clearance for our Naranda Limestone Mines (ML Area-71.01 Ha) for the period of **October-2023 to March-2024**. Soft copy of the compliance report is sent on email ID eccompliance-mh@gov.in

Submitted for your kind information and record please.

Thanking you

Yours Faithfully,
For Dalmia Cement (Bharat) Ltd.
Naranda Limestone Mine

(Subbaraidu Ayyagari)

Unit Head

- CC: 1. The Regional Director, Central Pollution Control Board (CPCB), Regional Office, Survey No, 110, Dhankude Multipurpose Hall, Baner Road, Baner, Pune, Maharashtra - 411045.
 - 2. The Member Secretary, Maharashtra Pollution Control Board, Kalpataru Point, 3rd and 4th floor, Opp. CineMax Theatre, Sion (E), Mumbai 400 022.
 - 3. Regional Officer, Maharashtra Pollution Control Board (MPCB), 1st Floor, Udyog Bhawan, Railway Station Road, Chandrapur 442401.

Dalmia Cement (Bharat) Limited

Your (Environment Clearance) application has been Submitted with following details		
Proposal No	F. No J-11015/380/2007 -IA II (M)	
Compliance ID	72472368	
Compliance Number(For Tracking)	EC/M/COMPLIANCE/72472368/2024	
Reporting Year	2024	
Reporting Period	01 Jun(01 Oct - 31 Mar)	
Submission Date	31-05-2024	
IRO Name	V Geroge Jenner	
IRO Email	tr025@ifs.nic.in	
State	MAHARASHTRA	
IRO Office Address	Integrated Regional Offices, Nagpur	
Note:- SMS and E-Mail has been sent to V Geroge Jenner, MAHARASHTRA with Notification to Project Proponent.		

ENVIRONMENTAL CLEARANCE COMPLIANCE REPORT

Ref: Environmental Clearance F. No. - J-11015/380/2007 -IA II (M), Date: 12th Dec 2008

Name of the Industry: Naranda Lime Stone Mines, Dalmia Cement (Bharat) Limited.

EC Details – Environmental Clearance for Naranda Limestone Mine (ML area 71.01 Ha and production of 2.4 MTPA) at village Naranda, in Korpana Mandal, in Chandrapur Distt., in Maharashtra.

Compliance Period - Oct 2023 to Mar 2024

Sr. No.	Condition	Compliance status
Α	Specific Conditions	
(i)	No two pits shall be simultaneously worked i.e. before	Complying with
	the first is exhausted and reclamation work completed,	
	no more mineral bearing area shall be worked.	Mining is being done in accordance with approved Review of Mining plan. At present,
		mine working is being operational in one pit only for excavation of mineral. Photograph
		of mine pit is shown as Annexure-I .
(ii)	After exhausting the first mine pit and before starting	Complying with
	mining operations in the next pit, reclamation and	
	plantation works in the exhausted pit shall be	The first mine pit is operational and still active. Plantation has been done all along the
	completed so as to ensure that reclamation, forest	Safety zone and Mines Lease Boundary. After taking whole material from the active pit,
	cover and vegetation are visible during the first year of mining operations in the next pit.	the exhausted pit area will be reclaimed by plantation so as to ensure that reclamation,
	inning operations in the next pit.	forest cover and vegetation are visible during the first year of mining operations in the
		next pit. The condition is being adhered.
(iii)	Adequate buffer zone shall be maintained between two	Mining is being done in accordance with approved Review of Mining plan. At present,
	consecutive mineral bearing deposits.	mine working is being operational in one pit only for excavation of mineral. 7.5m green
		belt is developed across the working pit.
(iv)	Primary survey data of flora and fauna shall be	Erstwhile MIL had submitted primary flora & fauna details obtained from Deputy
	submitted to the ministry within six months.	Conservator of Forests, Central Chanda Division, Chandrapur with letter no.
		MIL/Mines/2009-10/503, dated 16.02.2010. Copy of submitted letter is enclosed as
		Annexure-II.
(v)		Earstwhile MIL had submitted primary flora & fauna details obtained from Deputy
	consultation with the office of the concerned chief	Conservator of Forests, Central Chanda Division, Chandrapur with our letter no.

Sr. No.	Condition	Compliance status
	wildlife warden within six months. The plan shall	MIL/Mines/2009-10/503, dated 16.02.2010 and also informed to the MoEFCC as
	consist of inbuilt monitoring and evaluation	Conservation Plan for wildlife is not required as there is no Schedule I species in the
	mechanism. Necessary fund for implementation of the	study area based on the documents available.
	same shall be separately allocated and shall not be	
	diverted for any other activity.	However, upon approval of NCLT for implementation of the Resolution Plan, MIL has
		become a subsidiary of DCBL from September 10, 2020.
(vi)	Blast vibrations study shall be conducted and	Complying with
	submitted to the Ministry within six months. The study	
	shall also provide measures for prevention of blasting	Mining is being done by controlled blasting technology. Use of Delay Detonator, Non-
	associated impact on nearby houses and agricultural	Electric detonator & Controlled blasting to minimize Fly rock and Ground Vibration.
	fields.	Regular monitoring of ground vibration is being practiced. Maximum peak particle
		velocity result is below 5 MM/Sec. We are adopting the measures for prevention of
		blasting associated impact on nearby houses and agricultural fields. The condition may
		be treated as complied. Latest Blast Vibration study has been done during Nov-2023 to
		Mar-2024 by Faculty of Engineering & Technology, AKS University, Satna, M. P. and
(**;;)	Continuous six ambient quality monitoring eventors	study report is enclosed as Annexure-III.
(vii)	Continuous air ambient quality monitoring system shall be installed before three months of start of	Complying with
	mining activity at appropriate sites (including cement	Online continuous ambient air quality monitoring station has been installed at mines
	plant) in consultation with the State Pollution Control	premises and data is being transferred to the server of CPCB and MPCB. Photograph of
	Board / Regional office of central pollution control	CAAQMs station enclosed as Annexure-IV .
	board. Ambient air quality data shall be regularly	CAAQMS Station enclosed as Annexure-1v.
	submitted to the Regional Office of the Ministry and	Monthly ambient air quality monitoring report is being submitted to the concern
	other concerned departments.	authority i.e. MPCB on Monthly.
	The ambient air quality monitoring shall be including	dudionly not in ab on Fronting.
	PM10, regular analysis of silica content for PM10, shall	We are regularly conducting ambient air quality monitoring including PM10 and PM2.5
	be carried out. Assessment of silica in silt shall be	through NABL accredited laboratory. Assessment of the silica in silt in being carried
	regularly carried out and record maintained.	out and records are being maintained.
(viii)	Need based assessment for the nearby villages shall be	Complying with
	conducted to study economic measures which help in	
	upliftment of poor section of society. Income	Need based assessment has been done in nearby villages by consulting local gram
	generating projects/ tools such as development of	panchayat and nearby villagers to help in upliftment of poor section of society.
	fodder farm, fruit bearing orchards, vocational training	Accordingly, DCBL providing employment opportunities to the personal residing nearby
	etc. can form a part of such programme. Company shall	villages.
	provide separate budget for community development	

Sr. No.	Condition	Compliance status
	activities and income generating programmes. This will be in addition to vocational training for individuals imparted to take up self-employment and jobs.	Under CSR activities, Infrastructure development, educational, Health and Vocational training, Agriculture & Animal Husbandry, Rainwater Harvesting, Environmental Awareness activities etc. are being organized for the nearby villagers.
		In addition to the above, mining project is being generated revenue to the government in the form of Royalty, DMF and NMET.
		Better medical facilities, transportation and communication facilities are available and the, better admixture of the culture which results in preservation of cultural heritage and this project will uplift socio-economic level.
		The mining projects provides directly and indirect employment for the nearby villagers. The literacy rate and better living standards is enhanced due to increased earning capacity of the villager.
		CSR expenditures from 2020-21 to 2023-24 is enclosed as Annexure-V .
(ix)	Action plan for economic upliftment of poor sections of societies specially tribals, scheduled caste shall be formulated and implemented within six months. Status of implementation shall be reported to the Regional Office of the Ministry and the State Govt.	Pursuant to approval of NCLT for implementation of the Resolution Plan, MIL has become a subsidiary of DCBL from September 10, 2020. The Naranda Limestone mine was abandoned from 2015 to Nov'21 and was reopened on 05.12.2021 by DCBL and commenced extraction of Limestone.
	office of the Ministry and the state dove.	However, all the expenses incurred before 05.12.2021 were done by MIL. The details of the expenditures are not available.
		However, all the expenditures spend after acquiring MIL by DCBL. About, Rs. 98.92 lakhs have been spent on the social-economic development in nearby villages. Details of Implementation of Public hearing Action plan is enclosed herewith as Annexure-VI .
(x)	Land use pattern of the nearby villages shall be studied and action plan for abatement and compensation for damage to agricultural produce and land/ common property land (if any) in the nearby villages, due to	No agricultural land/public property is being damaged due to mining activity. Land use pattern of the nearby villages is enclosed as Annexure-VII .
	mining activity shall be submitted to the Regional office of the Ministry within six months. Annual status of implementation of plan and expenditure thereon	
	shall be reported to the Regional Office of the Ministry	

Sr. No.	Condition	Compliance status
	from time to time.	
(xi)	Rain water harvesting shall be undertaken to recharge	Complying with
	the ground water source. Status of implementation shall be submitted to the Regional Office of the Ministry within six months and thereafter every year from the next consequent year.	Rain water is being collected during rainy season in the lower bench of the mine to recharge ground water resources and water harvested in mines pit is being utilized in the mining operations, dust suppression and Plantation & greenbelt development.
		Rainwater Harvesting injection wells are constructed to recharge the ground water, in addition to this nearby village ponds are deepened to store more rainwater and also recharge the ground water to enhance the water table. Photographs of rain Water Harvesting structures and village pond is enclosed as Annexure-VIII.
(xii)	Measures for prevention and control of soil erosion and management of silt shall be undertaken. Protection of dumps against erosion shall be carried out with geo	Following measure are being implemented followed to control the soil erosion and for silt management:
	textile matting or other suitable material, and thick	1. Formation of water garland to regulate and drain the rain waters from the quarry
	plantation of native trees and shrubs shall be carried	and direct its course away from the dumping area.
	out at the dump slopes. Dumps shall be protected by	2. The dump is designed to have reserve slopes so that rain water does not flow
	retaining walls.	through the dump slopes.
		3. Provision of plantation around the foot of the dumps to control the soil erosion and silt management.
	Cultivable waste land within 5 km radius of the lease	Complying with
	shall be identified and developed into productive land	
(xiii)	and made available to villages. Status of	The cultivable waste land within 5 km radius of the lease is identified and developed into
	implementation shall be submitted to the Regional	productive land and made available to villages.
	office of the Ministry within six months.	
(xiv)	Trenches / garland drains shall be constructed at foot	Complying with
	of dumps and coco filters (or other suitable filters)	Coulond during constructed along the viscote dimens to callegt min off/storm vistor and
	shall be installed at regular intervals to arrest silt from being carried to water bodies. Adequate no of check	Garland drains constructed along the waste dumps to collect run off/storm water and routed to siltation pond of Capacity 1000 m3 then collected in mine pit. In addition to
	dams and gully plugs shall be constructed across	this, adequate number of check dams has been constructed at mines premises to arrest
	seasonal / perennial nallahs (if any) flowing through	the silt.
	the ML area and silts arrested. De-silting at regular	
	intervals shall be carried out.	The collected water is being used for plantation & greenbelt development and water
	Garland drain of appropriate size, gradient and length	sprinkling on haul road. Photographs showing Garland drains & are shown below:
	shall also be constructed for both mine pit and for	
	waste dump. Sump capacity shall be designated	

Sr. No.	Condition	Compliance stati	us		
	keeping 50% safety margin over and above peak sudden rainfall (based on 50-year data) and maximum discharge in the area adjoining the mine site. Sump capacity shall also provide adequate retention period to allow proper settling of silt material. Sedimentation pits shall be constructed at the corners of the garland drains and de-silted at regular intervals.	● O NATIONAL TIES AND PRESENT CONTRACT			
(xv)	Ground water in the core zone shall be regularly monitored for contamination and depletion due to mining activity and records maintained. The monitoring data shall be submitted to the regional office of the ministry regularly. Further, monitoring points shall be located between the mine and drainage in the direction of flow of ground water shall be set up and record maintained	the mining area Party Environmen	through online Piezon ntal monitoring is bein	neter and records are b ig carried out by M/s Go	rried out in and around being maintained. Third o Green Mechanism Pvt cometer is enclosed as
(xvi)	Fugitive dust generation shall be controlled. Fugitive dust emission shall be regularly monitored at locations				or the dust suppression ing done in nearby area
	of nearest human habitation (including schools and other public amenities located nearest to sources of	and reports are being submitted to Regional Office, MoEF&CC along with the half yearly compliance report & latest fugitive emission report is enclosed			
	dust generation as applicable) and records submitted	_	_	rts during the compliance	e period is as follows:
	to the Regional Office of the Ministry.	Month	Near Batching Area	Near Pump House Area	Near Crusher Area
		Oct-23	193	277	280
		Nov-23	196	279	284
		Dec-23	219	306	291
		Jan-24	244	317	282
		Feb-24	288	327	306
		Mar-24	291	334	311
(xvii)	Transportation of ore shall be done by covering the	The stipulation is	s being adhered. The	limestone of the mines	is being utilized in the

Sr. No.	Condition	Compliance status
	trucks with tarpaulin or other suitable mechanism so	captive cement plant located near the mines area. The material is being transported
	that no spillage of ore/dust takes place. Transportation	from crusher to plant through covered conveyer belt to avoid any spillage of ore/ dust.
	shall be done only during day time.	Transportation done usually during day time.
(xviii)	Occupational health and safety measures for the workers including identification of work related health hazardous, training of malaria eradication, HIV and	As per the mining statutory laws regular periodic medical check-ups for the persons engaged in the mines is being done.
	health effects on exposure to mineral dust etc. shall be carried out. The company shall engage a full time a fulltime qualified doctor who is trained in occupational	Moreover, we are imparting free medical treatment at free of cost by the company and dispensary is established at the plant site with medical practitioner.
	health. Periodic monitoring for exposure to respirable mineral dust on the workers shall be conducted and	Company ambulance is available to shift the casualty in case of serious condition.
	records maintained including health records of the workers. Awareness programme for workers on impact of mining on their health and precautionary	For occupational health and safety measures periodical health check up being carried out by medical practitioner.
	measures like use of personal equipment etc. shall be carried out periodically. Review of impact of various health measures undertaken (at interval of five years of less) shall be conducted followed blow up action wherever required.	Personal protective Equipment's are being provided to works working in the mines.
(xix)	Maintenance of village roads through which transportation of ores are undertaken shall be carried out by the company regularly at its own expenses. The road shall be black topped.	The condition is treated as complied. Village Road is not being used for transportation of minerals. Haul road has been constructed in mines for mines operation and being repaired time to time as per requirement.
(xx)	Top soil/ soil waste shall be stacked properly and separately with proper slope and adequate safeguards and shall be utilized for backfilling (wherever applicable) for reclamation and rehabilitation of mined out area.	Top soil is being stacked with proper slope and adequate safeguards. The topsoil in the mining area striped and preserved along the mine lease boundary for plantation & greenbelt development and excess topsoil utilized for backfilling and reclamation of mined out area.
(xxi)	Monitoring of soil samples for assessment of contamination due to mining activity shall be regularly conducted and records maintained.	Soil Monitoring is being done regularly are records are maintained. Latest Soil Report is enclosed as Annexure-X .
(xxii)	Over burden (OB) shall be stacked at earmarked dump site(s) only and not be kept active for long period. The maximum height of the dump shall not exceed 30 m, each stage shall preferably be of 10m and overall slope	The NCLT, Mumbai approved the Resolution Plan of Dalmia Cement (Bharat) Limited (the Resolution Applicant) for the revival of MIL vide its Order(s) dated July 03, 2019, and July 22, 2019, and the same has been upheld by National Company Law Appellate

Sr. No.	Condition
	of the dump shall not exceed 28°. The OB dump shall be
	backfilled. The OB dumps shall be scientifically
	vegetated with suitable native species to prevent
	erosion and surface run off.
	Monitoring and management of rehabilitation areas
	shall continue until the vegetation becomes self-
	sustaining. Compliance status shall be submitted to the
	Ministry of Environment & Forests of six-monthly
	basis.

Compliance status

Tribunal ("NCLAT) vide its judgement dated January 27, 2020.

The Naranda Limestone mine was abandoned from 2015 to Nov 21 and was reopened on 05.12.2021 and commenced extraction of Limestone by DCBL.

Overburden has been stacked at earmarked dump site (s) which are still active and not mature. Study of reclamation of overburden dump will be carried out in near future and will be submitted in due course of time.

The Over burden (OB) generated during mines operation is being and will be stacked at earmarked dump site(s) as per the IBM approved mining plan. The OB dumps will be vegetated scientifically with suitable native species to prevent erosion and surface run off.

Continuous monitoring and management of rehabilitation areas is being and will be done to maintain the vegetation to make itself – sustaining. Compliance status of the same is being submitted to the MoEF&CC on half yearly basis.

The limestone production, reject and over burden generation details during last 5-year period is given below

SN	FY Year	Production (MT)	Over Burden (MT)	Reject (MT)
1	2018-19	0	0	0
2	2019-20	0	0	0
3	2020-21	0	0	0
4	2021-22	314200	8083	137307
5	2022-23	1038212	8390	482082
6	2023-24	1273946	114281	755402
	Total	2626358	130754	1374791

Photographs of OB dump and garland drains are enclosed as Annexure-XI.

Sr. No.	Condition	Compliance status
(xxiii)	Slope of the mining bench and ultimate pit limit shall	Complying with
	be as per the mining scheme approved by Indian	
	Bureau of Mines.	Slope of the mining bench and ultimate pit limit is being maintained as per IBM approved mining plan. Photograph showing slope of mining benches is given below:
		approved mining plan. Photograph showing slope of mining benches is given below:
(xxiv)	Drilling (if any) shall be conducted by using dust	The drilling and blasting operation are being carried out during daytime only. We are
	extractors/ wet drilling. Controlled blasting shall be undertaken.	using wet drilling by inbuilt water injection system for drills to suppress dust generation at source.
		Blasting operation is being done with controlled blasting technique by using NONEL,
		Muffle Blasting and Delay Detonators. Hence, the condition may be treated as complied.
(xxv)	Plantation shall be raised adequately in the ML area, haul roads, OB dump sites etc. Green belt development	Plantation is being carried out in ML area as per the Mining Plan and CPCB guidelines.
	shall be carried out considering CPCB guidelines	Out of 71.01 ha of ML area, 42.82 ha area will be covered under plantation & greenbelt
	including selection of plant species and in consultation	development at the end of conceptual period.
	with the local DFO / Agricultural department. Herbs	At any court and only a planetation has been done in 0.25 he with planet and circ of 11176
	and shrubs shall also form a part of afforestation programme besides tree plantation. The density of the	At present, greenbelt & plantation has been done in 9.25 ha with plant species of 11176 nos. We have done the plantation along the mining lease boundary, internal road and
	trees shall be around 2500 plants per ha. The company	mining dump area etc. Further plantation is under progress.
	shall involve local people with the help of self-help	
	group for plantation programme. Details of year wise	Plantation details along with the photographs of the Green belt at Mines are enclosed as
	afforestation programme including rehabilitation of	Annexure - XII.
	mined out area shall be submitted to the Regional Office of the Ministry every year.	
L	office of the Phillion's every year.	

Sr. No.	Condition	Compliance status
(xxvi)	Regular monitoring of ground water level and quality	Complying with
	shall be carried out by establishing a network of	Regular monitoring of ground water level is being conducted in and around mining lease
	existing wells and constructing new piezometers	area. Installed one piezometer for continuous online ground water level monitoring in
	during the mining operation. The monitoring shall be	ML area. However, one piezometer installed at Plant which is adjacent to the ML
	carried out four times in a year – pre – monsoon	boundary. Photographs of Piezometer & ground water level monitoring data is enclosed
	(April-May), monsoon (August), Post – monsoon	as Annexure-IX.
	(November) and winter (January) and the data thus	Cround water quality manitoring is being garried out for me and nest managen
	collected shall be regularly shall be regularly sent to MoEF, Central Ground Water Authority and Regional	Ground water quality monitoring is being carried out for pre and post monsoon, monsoon and winter seasons. Report enclosed as Annexure-XIII.
	Director, Central Ground Water Board.	monsoon and writter seasons. Report enclosed as Annexure-Ann.
(xxvii)	The waste water from the mine shall be treated to	No waste water is being discharged into natural stream. All the equipment and HEMM
(,	conform to the prescribed standards before	are outsourced and maintenance, repairing is being done at designated workshop only.
	discharging in to the natural stream. The discharged	and the second s
	water from the Tailing Dam (if any) shall be regularly	Domestic sewage generated is being disposed through septic tank followed by soak pit.
	monitored and report submitted to the Ministry of	
	Environmental & Forests, Central Pollution Control	
	Board and the State Pollution Control Board.	
(xxviii)	Prior permission from the competent authority shall	Water requirement of 131 KLD is being met from Penganga River for which an
	be obtained for extraction of ground water, if any.	agreement has been executed between Dalmia Cement (Bharat) Limited and Irrigation
		department. Copy of agreement is enclosed herewith. Annexure- XIV.
		Prior permission from the competent authority (CGWA) has been obtained for extraction
		(dewatering) of ground water (46 KLD) vide NOC No. CGWA/NOC/MIN/ORIG
		/2022/14242 Dated 05.01.2022. Application for renewal has been submitted on
		04.01.2024.
(xxix)	Vehicular emission shall be kept under control and	Complying with
	regularly monitored. Vehicles used for transportation	
	of ores and others shall have valid permission as	Vehicular emission being under control and regularly monitored and being allowed only
	prescribed under Central Motor Vehicle Rules, 1989	PUC certified vehicles in ML area for mining excavation activities and transportation.
	and its amendments. Transportation of ore shall be done only during day time. The vehicles transporting	Limestone is being transported from crusher to plant through covered conveyer belt. All
	ores shall be covered with a tarpaulin or other suitable	Vehicles transporting ore is being covered with tarpaulin to control dust emission. No
	enclosures so that no dust particles / fine matters	overloading of ores is done for mineral transportation.
	escape during the course of transportation. No	or o
	overloading of ores for transportation shall be	No wild life sanctuary is located near ML area of Naranda Limestone Mine.

Sr. No.	Condition	Compliance status
	committed. The trucks transporting ore shall not pass through wild life sanctuary.	
(xxx)	Action plan with respect to suggestions/improvements and recommendation made during pubic consultation / hearing shall be submitted to the Ministry and the State Govt. within six months.	Pursuant to approval of NCLT for implementation of the Resolution Plan, MIL has become a subsidiary of DCBL from September 10, 2020. The Naranda Limestone mine was abandoned from 2015 to Nov'21 and was reopened on 05.12.2021 by DCBL and commenced extraction of Limestone. However, all the expenses incurred before 05.12.2021 were done by MIL. The details of the expenditures are not available. However, all the expenditures spend after acquiring MIL by DCBL About, Rs. 98.92 lakhs have been spent on the social-economic development in nearby villages. Details of
		Implementation of Public hearing Action plan is enclosed herewith as Annexure-VI .
(xxxi)	A final mine closure plan, along with details of Corpus Fund, shall be submitted to the Ministry of Environmental & Forest, 5 year in advance of final mine closure for approval.	Noted Final Mine Closure Plan (FMCP) will be submitted to IBM and MoEF&CC as per prevailing rules for necessary approval. As our Mining Lease is valid up to dated period up to 06-04-2036.
B.	General Condition	up to 00-04-2030.
(i)	No change in mining technology and scope of working shall be made without prior approval of the Ministry of Environment & Forests.	The stipulation is being adhered and there is no change in mining technology and scope of working as the mining is being done in accordance with approved Review of Mining Plan and there is no change in mining technology and scope of working.
		For any change in mining technology and scope of working we shall obtain prior approval of the Ministry of Environment & Forests.
(ii)	No change in the calendar plan including excavation,	Noted
	quantum of mineral (iron ore) and waste shall be made.	There is no change in the Calendar Plan for the production of Quantum of Mineral Limestone and Waste. However, less production of limestone as per Calendar plan due to less demand of cement in market.
(iii)	Four ambient air quality monitoring station shall be established in the core zone as well as in the buffer zone for PPM SPM SQ2 NOv monitoring Location of	Complying with Ambient air quality monitoring stations are established in the core zone as well as in the
	zone for RPM, SPM, SO2, NOx monitoring. Location of the stations should be decided based on the	buffer zone.
	meteorological data, topographic features and environmentally and ecologically sensitive target and frequency of monitoring should be undertaken in	Summary of ambient air quality monitoring results for core zone & buffer zone is enclosed as Annexure-XV .

Sr. No.	Condition	Compliance status	
	consultation with the State Pollution Control Board.		
(iv)	Data on ambient air quality (RPM, SPM, SO2, NOx) should be regularly submitted to the ministry including its regional office located at Bhopal and the State Pollution Control Board / Central Pollution Control Board once in six months.	Ambient Air Quality Monitoring carried out through NABL accredited laboratory, data is being submitted to the IRO, MoEF&CC, Nagpur and MPCB along with the half yearly compliance report.	
(v)	Fugitive dust emissions from all the sources shall be controlled regularly. Water spraying arrangement on haul roads, loading and unloading and at transfer points shall be provided and properly maintained.		
(vi)	Measures shall be taken for control of noise levels below 85 dB(A) in the work environment. Workers engaged in operations of HEMM, etc. shall be provided with ear plugs / muffs.	Complying with. Noise levels are monitored and maintained within the prescribed limit of 85 dB(A). Personnel protective equipment like ear plugs/muffs is provided to all workers engaged in mining operations.	
(vii)	Industrial waste water (workshop and waste water from the mine) should be properly collected, treated so as to conform to the standards prescribed under GSR 422 (E) dated 19 th May, 1993 and 31 st December, 1993 or as amended from time to time. Oil and grease trap shall be installed before discharge of workshop effluents.	No industrial waste water is being generated due to mining activity. All the equipment and HEMM are outsourced and maintenance & repairing work is being done at designated workshop only.	
(viii)	Personnel working in dusty areas shall be provided with protective respiratory devices and they shall also be imparted adequate training and information on safety and health aspects.	Complying with. PPEs have been provided and used by the persons engaged in drilling, dozing and loading and unloading operation to protect workers from respiratory illness and other hazards. Vocational Training (VT) is being provided as under required VT Rules 1966 to impart regular safety and awareness training. Regular check-up of workers is being carried out and till date no any abnormality is observed.	

Sr. No.	Condition	Compliance status
(ix)	Provision shall be made for the housing the labourers within the site with all necessary infrastructure and facilities such as fuel for cooking, mobile toilets, mobile STP, safe drinking water, medical health, crèche etc. the housing may be in the form of temporary structures to be removed after the completion of the project.	Local labors (residing in nearby village) engaged for mining and allied operation are. All other outside workers are being accommodated in Temporary Labour colony with all necessary infrastructure and facilities.
		Established OHS centre to facilitate medical health check-up of workers engaged in mining operation.
(x)	A separate Environmental Management Cell with suitable qualified personnel shall be set-up under the control of a Senior Executive, who will report directly to the head of the Organisation.	Complying with A separate environmental management cell comprising of qualified and experienced staff is established under the control of Environment Head who report to Unit head.
(xi)	The project authorities shall inform to the Regional Office of the Ministry located at Bhopal regarding data	Complying with

Sr. No.	Condition	Compliance status
	of financial closure and final approval of the project by the concerned authorities and the date of start of land development work.	This is an existing and ongoing limestone mining project.
(xii)	The funds earmarked for environmental protection measures shall be kept in separate account and shall not be diverted for other purpose. Year wise expenditure shall be reported to the Ministry and its Regional Office located at Bhopal.	Expenditure towards environmental protection is being submitted in six monthly compliance report. Fund earmarked for environmental protection measures is being and will be kept in separate account. Year wise expenditure towards environmental protection is enclosed as Annexure-XVI.
(xiii)	The project authorities shall inform to the Regional Office located at Bhopal regarding date of financial closures and final approval of the project by the concerned authorities and the date of start of land development work	Complying with This is an existing and ongoing limestone mining project.
(xiv)	The regional office of the Ministry located at Bangalore shall monitor compliance of the stipulated conditions. The project authorities shall extend full cooperation to the officer (s) of the Regional Office by furnishing the requisite data/information/monitoring reports.	Complying with Already in the practice and will continue in future also to comply all the conditions as advised by the authority.
(xv)	A copy of clearance letter will be marked to concerned Panchayat / local NGO, if any from whom suggestion / representation has been received while processing the proposal.	Complying with No suggestion / representation received against EC.
(xvi)	State pollution control board shall display a copy of the clearance letter at the Regional office. District industry Centre and Collector's office / Tehsildar's Office for 30 days.	Complying with
(xvii)	The project authorities shall advertise at least in two local newspapers widely circulated. One of which shall be in the vernacular language of the locality concerned within 7 days of the issue of the clearance letter informing that the project has been accorded environmental clearance and a copy of the clearance letter is available with the State Pollution Control Board and also at web site of the Ministry of Environment and Forests at http://envfor.nic.in and a	Complying with Advertisement was published in Two newspapers and copies were submitted to MOEF&CC, New Delhi and their regional office at Bhopal.

Sr. No.	Condition	Compliance status
	copy of the same shall be forwarded to the Regional	
	Office of the Ministry located in Bhopal.	
5.	The ministry or any other competent authority may	Noted.
	alter/modify the above conditions or stipulate any	
	further condition in the interest of environmental	
	protection.	
6.	Concealing factual data or submission of false /	Noted.
	fabricated data and failure to comply with any of the	
	conditions mentioned above may result in withdrawal	
	of this clearance and attract action under the	
	provisions of Environmental (Protection) Act, 1986.	
7.	Any appeal against this environmental clearance shall	Noted.
	lie with the National Environmental Appellate	
	Authority, if preferred, within a period of 30 days as	
	prescribed under section 11 of the National	
	Environmental Appellate Authority Act, 1997.	
8.	The above conditions will be enforced inter – alia,	Noted.
	under the provision of the Water (Prevention &	
	Control of Pollution) Act, 1974, the Air (Prevention &	
	Control of Pollution) Act, 1981, the Environmental	
	(Protection) Act, 1986 and the Public Liability	
	Insurance Act. 1991 along with their amendments and	
	rules.	

ANNEXURE-I PHOTOGRAPH OF MINE PIT





Ref: MIL/MINES/2009-2010/503 16TH February 2010

To,
Director
Ministry of Environment & Forest
Paryavaran Bhavan,
C.G.O. Complex, Lodhi Road,
New Delhi – 11 0003

Sub: Specific Conditions no. (iv) & (v) of MoEF letter for Environment Clearance in respect of Naranda Limestone Mine(71.01ha).

Dear Sir,

This has reference to your letter No. J-11015/380/2007-IA,II(M) Dt. 12.12.2008 of Environment Clearance, accorded by your good self for Naranda Limestone Mine(71.01ha) of M/s Murli Industries (Cement Unit) for limestone production of 2.40MTPA in Taluka-Korpana, District-Chandrapur (Maharashtra).

It is revealed in part of specific conditions (condition no. A-iv&v) to submit primary survey data on flora & fauna & Conservation Plan for wildlife. In this context, we are submitting the primary data on flora & fauna given by the Dy.Conservator of Forests, Central Chanda Division, District- Chandrapur as **Annexure-I** for your kind perusal.

Conservation Plan for wildlife is not required as there is no wildlife involved as per Schedule I & II of Forest act.

Thanking You.

Yours faithfully, For Murli Industries Ltd. (Cement Unit)

(Manoj Kumar Thakur) Agent / Dy. GM(Mines)

CC: The Regional Controller of Mines (CZ), Indian Bureau of Mines, Nagpur (Mah.)

cic

-/-

Report on


Scientific Study for Blast Vibration Analysis & Controlled blasting of

NARANDA LIMESTONE MINE

M/s Dalmia Cement (Bharat) Limited

Village- Naranda, Tehsil & P.O. – Korpana, Dist- Chandrapur (M.H.)

(Work order No- 454001354/481 Dated- 08.11.2023)





Department of Mining Engineering

Faculty of Engineering & Technology AKS University, Satna, M. P.

November- March, 2023-24



AKS University, Satna

Sherganj, Panna Road, Satna (M.P.) Pin code 485001 Telephone No.: 0888-953-7776 Website: www.aksuniversity.ac.in

ACKNOWLEDGEMENT

Mine Management of Naranda Limestone Mine, of M/s Dalmia Bharat (Cement) Limited situated in Village-Naranda, Tehsil & P.O. – Korpana, Dist- Chandrapur (M.H.) had entrusted us to undertake Scientific Study for Blast Vibration Analysis & Controlled blasting. The Mine is situated near to village habitation area and the distance of nearest village house/structure is approx. 150m from lease boundary. due to proposed development towards village the impact of blasting to the structure situated near to lease boundary, Mine Management decided to undertake blasting more scientifically and site specific to reduce the impact of blasting and to ensure safety and minimum damage to the nearest structure. During the study, we made geological and geotechnical investigations. This entire deposit is a complex geological set up, with incidence of intercalations in the ore body, presence of folds and faults prominently. During our study we received full cooperation from all the field supervisors and from entire blasting crew in addition to valuable input from –

- 1. Shri Subba Raidu Ayyagari, Agent Mines
- 2. Shri Ashish Kulkarni, HOD- Mines
- 3. Shri Jai Sachdeva, Manager-Mines
- 4. Shri Shrikant Mandalwar, Asst. Manager- Mines
- 5. Shri Pankaj Gautam, Asst Manager- D&B
- 6. Shri Pradeep Singh, Foreman- D&B

This study was undertaken by our team comprising of -

- 1. Dr G.K. Pradhan, Prof. of Mining Engineering,
- 2. Shri Naman Soni, Project Associate (Mining)
- 3. Shri Atul Deep Soni, Asst. Professor

Prof G.K. Pradhan

Recipient of National Geosciences Award PI/Professor of Mining Engineering & Dean Faculty of Mining Engineering

Email: gkpradhan58@gmail.com

Table of Contents-

Particulars

1.	Introduction	1-2
2.	Geology	2-5
3.	Basic Blast design parameters	6-8
4.	Impact of Blasting to surrounding environment	. 8-15
5.	Field investigation	15-20
6.	Empirical Relationship b/w ground vibration and explosive charge	21
7.	Development of ground vibration and AOP predictor equation	22-24
8.	Assessment of ground vibration impact	25-28
9.	Recommendations	29-31
10). Conclusion	32-33
	Annexure	33-54
	References	55

Page No.

List of Figures-

- Figure-1: Topographical Location of Naranda LST Mine of DCBL
- Figure-2: Different Zones of rock deformation around a blast
- Figure-3: Common causes of fly rock in surface bench blasting
- Figure-4: Google Map showing structure not belonging to owner near to lease boundary
- Figure-5: Surface plan showing experimental blast location and location of instrument
- Figure-6: Meeting along team member of AKSU and Dalmia Cement Management
- **Figure-7:** Charge of Explosive at third bench OB in presence of AKSU Technical Support Team.
- Figure-8: Charging in progress with Technical Support from AKS University Team
- Figure-9: View of Mine Benches and Plant of Dalmia Cement, Chandrapur
- Figure-10: Stemming & Connection of TLD's in presence of technical Support team
- Figure-11: View of Charging in 4th bench
- Figure-12: Measurement of drill hole parameters
- Figure-13: Regression analysis result for ground vibration prediction using maximum charge per delay (Q_{max})
- Figure-14: Regression analysis result for ground vibration prediction using total charge per round (TQ)
- Figure-15: Regression analysis result for AOP prediction using maximum charge per delay (Q_{max})
- Figure-16: Regression analysis result for AOP prediction using Total charge per round (Qtotal)
- **Figure-17:** Predicted value of ground vibrations at different distances for different values of maximum charge per delay
- **Figure-18:** Safe values of maximum charge per delay for various distances determined from the ground vibration predictor equation
- **Figure-19:** Safe values of maximum charge per round for various distances determined from the ground vibration predictor equation
- **Figure- 20:** Predicted value of air overpressure (AOP) at different distances for different values of maximum charge per delay.
- Figure-21: Two Row Blast Pattern with delay
- Figure-22: Three Row Blast Pattern with delay

List of Tables-

- **Table-1:** Ranges of specific charge for bench blasting in surface mines (after Jimeno et al., 1995)
- **Table-2:** DGMS-prescribed permissible limit of ground vibrations (Technical Circular No. 7, 1997)
- **Table-3:** Peak Particle velocity as damage criteria for different types of rocks (after Indian Standard Institution, IS:6922, Sec. 4.1.1.2, 1973)
- **Table-4:** Typical air overpressure criteria (after Oriard, 2002)
- **Table-5:** Air overpressure limits recommended by USBM for Surface mining (RI 8485)
- Table-6: Central Pollution Control Board (CPCB) permissible levels for noise exposure for work zone area
- **Table-7:** List of Structure not belonging to owner and its distance
- Table-8: Summary of experimental blasts.
- **Table-9:** Summary of blast Recorded data (12 observation).
- Table-10: Predicted values of ground vibrations produced by different maximum charge per delay
- **Table-11:** Threshold level of PPV for different structures near the ML Area.
- **Table-12:** Predicted Safe MCPD (Maximum charge per delay).
- **Table-13:** Predicted Safe MCPR (Maximum charge per round).
- Table-14: Predicted values of air overpressure/noise produced by different maximum charge per delay-
- **Table-15:** Safe Predicted value of MCPD & MCPR.
- **Table-16:** Blast design parameters as recommended shall be as follows.
- Table-17: MCPD & MCPR for the various structures near to lease boundary.

INTRODUCTION-

Dalmia Bharat Group is a pioneer in the cement manufacturing for over eight decades since 1939. Dalmia Cement (Bharat) Limited (DCBL) is the 4th largest listed Indian Cement Company having strong presence in Southern, Eastern & North-East region of the country. The company operates a manufacturing capacity of 44.6 million tonnes per annum (MTPA), across 15 cement plants and grinding units, spread across nine states. With an expanding India footprint, the company is a category leader in all kinds of cement including superspecialty cements used for oil well, railway sleepers and air strips. Currently DCBL has Cement plants in Tamil Nadu (Dalmiapuram, Ariyalur & Sattur), Andhra Pradesh (Kadapa), Meghalaya (Thangskai) Karnataka (Belgaum), Jharkhand (Bokaro), Assam (Morigaon, Umrangso & Lanka), Odisha (Rajgangpur & Kapilas), Bihar (Kalyanpur), West Bengal (Medinipur) and Maharashtra (Chandrapur).

Chandrapur Cement Works:

Integrated cement plant of the M/s Chandrapur cement works (CCW) is located at village – Naranda, Tehsil – Korpana, Dist- Chandrapur- Maharashtra with the production capacity of Clinker 2 MTPA, Cement 2.86 MTPA (OPC & PPC), WHRB 16 MW and CPP 33 MW (2x16.5 MW) along with DG sets Capacity of 2x1500 KVA & 1x250 KVA. CCW incorporated under the Companies Act, 1956 was operating a Cement Plant at Naranda, District Chandrapur. The Company has now been taken over by M/s Dalmia Cement (Bharat) Limited (DCBL) in NCLT and it is now a Subsidiary of Dalmia Bharat Group Company.

In pursuant to the order dated April 05, 2017 of the National Company Law Tribunal, Mumbai Bench, Chandrapur cement works (CCW) was admitted for corporate insolvency resolution process in accordance with Insolvency and Bankruptcy Code, 2016. The resolution plan ("Resolution Plan") of Dalmia Cement (Bharat) Limited (DCBL) has been approved by the Committee of Creditors of CCW on December 20, 2017, the National Company Law Tribunal, Mumbai Bench vide its order(s) dated July 03, 2019, July 22, 2019 and July 25, 2019 and by the National Company Law Appellate Tribunal vide its order dated January 24, 2020. And pursuant to implementation of the Resolution Plan, CCW has become a subsidiary of DCBL from September 10, 2020. The plant of Chandrapur cement works was not being operational since October 2014. After the acquisition of CCW plant, Dalmia Cement (Bharat) limited has started the revival work from 10 Sept 2020 and the revival work of the plant is under progress. DCBL Plant will operate the plant by the Name of Chandrapur cement works.

Department is responsible for catering limestone requirement for manufacturing of cement through captive limestone mine. The captive limestone mine, Naranda Limestone Mine is fully mechanized opencast Limestone mine. The lease area lies in between latitude 19° 47′01.70″ N to 19° 47′47.90″ N and longitude 79°

02'51.10" E to 79° 03'50.60" E and falls in Survey of India topo sheet no. 56M/I. Total mining lease of the NLM is 71.01 hectares and lease deed was executed on 07th April '1986. The Mine is situated 45 Km away from Chandrapur city and 2 KM away from the Naranda village towards North direction. Approach road to reach the mine site is via Town Gadchandur, which is 25 Km away from Naranda on Gadchandur - Korpana State highway no. 236.

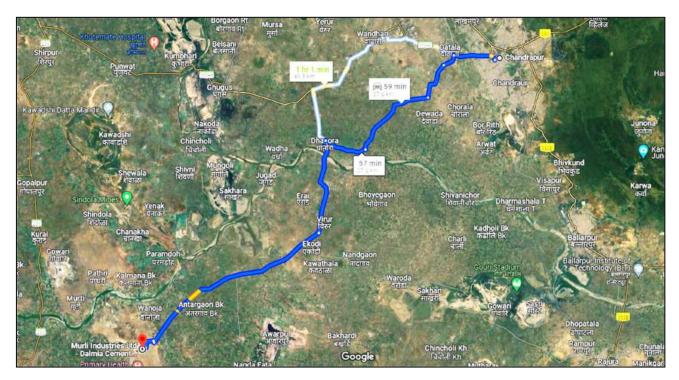


Figure-1: Topographical Location of Dalmia Cement Mine from Chandrapur

2.0 GEOLOGY-


2.1 Regional Geology-

Chandrapur district is situated in the eastern part of Maharashtra and covers an area of 8120 Sq km. Physio graphically, the area of district exhibits region of low-level plateaus in the south western part, plain of extrusive origin in the north western part, structural plateaus and plains in the western part, pediment/Pedi plain the western part structural hills and valleys in the north eastern part and floodplain along Wainganga and Wardha river courses. The maximum and minimum elevations of the area are 530 m and 195 m above msl in the south western and south eastern parts respectively. The district forms a part of Wardha and Wainganga sub-basin. The Wainganga River with its tributaries But, Bokardoh Gondni, Kalhar, Nag. Hattigota, Andhan, Pathn, Mul and Wardha River with its tributaries Penganga, Vagu, Erai Daiwal and Pathra drain the district. Rock formations ranging in age from Archaean to Quatemary are exposed in the district Bengpal Group of Archaean age (4000-2500 m.y) occupies the south eastern part and comprises granitic and migmatites with basic intrusive, amphibolite schist, homblende schist and banded ferruginous guartzite Amgaon Gneissic Complex

of Archaean to Palaeo Proterozoic age (2500-2100 my) comprising quartzite, banded-hematite quartzite with lenses of iron cres occurs as isolated outcrops in the north western part, Pakhal Group of Meso Proterozoic age (2000-1600 my) occurs in the south eastern part and comprises dolomitic limestone shale quartzite and sandstone. Penganga Group of Neo Proterozoic age (undifferentiated) (1600-570 my) occupies the south western part and north western parts and comprises limestone and shale.

2.2 Local Geology-

The area of Naranda-Pimpri-Wanoja comprises shales and carbonate rocks. The liho units i.e. limestone, dolomitic limestone, dolomite and shales occurring in the area belong to Penganga Beds of Precambrian Age. The stratigraphic sequence of rock units in the area are as under. Lithology Thickness Range Soil/Alluvium 0 m to 3.5 m Dolomite/Dolomitic limestone 0.5 m to 10 m Limestone 4.5 m to 22m Shales 4 m to >29m Description & Distribution of Rock Units: The main litho units occurring in the area are limestone, dolomitic limestone, dolomites and purple shales. These Rock Units are described below: Purple Shale: it is the oldest Rock Unit and it occurs in the major part of the area. It is well exposed and occupies low lying areas surrounding the limestone deposit. It is fine grained, soft and thinly laminated. It is brown to purple in colour. At some places purple shale with greenish tinge is also observed. These shales show NW-SE strike and low dips of 5 to 10 towards east. Limestone: It is the youngest member of Penganga Beds exposed in the area. It overlies the purple shales. The limestone in the area is interbanded with dolomitic limestone and at places dolomite. It is fined to medium grained, massive, compact, dark grey to black and pinkish in colour. It is generally thickly bedded with thickness of each bed varying from 2m to 10m Calcite Veins measuring up to 2 Cms in width are seen in the limestone Limestone at places is flaggy in nature soft and can be quarried as slabs The limestone beds vary in thickness from 5 Cms to 2m separated by thin films of yellowish argillaceous material. Dolomite / Dolomitic Limestone: These rocks are gray and grey white in colour. The site is connected by all-weather metal roads. The stratigraphic sequence of rock units in the area are as under:



The limestone and dolomites of the Precambrian Beds occupy the elevated portion (triangular) of the area

between the villages Naranda, Pimpri and Wanoja while the purple shales occupy the low-lying area surrounding the main limestone area except towards north. The limestone / dolomite extends further north beyond the Penganga River in Yavatmal District.

2.3 Description & Distribution of Rock Units

The main litho units occurring in the area are limestone, dolomitic limestone, dolomites and purple shales. These Rock Units are described below:

2.3.1 Purple Shale

It is the oldest Rock Unit and it occurs in the major part of the area. It is well exposed and occupies low lying areas surrounding the limestone deposit. It is fine grained, soft and thinly laminated. It is brown to purple in colour. At some places purple shale with greenish tinge is also observed. These shales show NW-SE strike and low dips of 50 to 100 towards east.

2.3.2 Limestone

It is the youngest member of Penganga Beds exposed in the area. It overlies the purple shales. The limestone in the area is interbedded with dolomitic limestone and at places dolomite. It is fined to medium grained, massive, compact, dark grey to black and pinkish in colour. It is generally thickly bedded with thickness of each bed varying from 2m to 10m. Calcite Veins measuring up to 2 cms in width are seen in the limestone. Limestone at places is flaggy in nature, soft and can be quarried as slabs. The limestone beds vary in thickness from 5 cms to 2m separated by thin films of yellowish argillaceous material.

2.3.3 Dolomite / Dolomitic Limestone

These rocks are grey and grey white in colour and exhibit Elephant Skin Weathering. The rocks are hard, compact, and massive and breaks with concoidal fractures.

2.4 Structure

The limestone and associated dolomitic / argillaceous limestone occurring to the south of Penganga River in Naranda-Pimpri-Wanoja covers about 25 Sq. Km area. It is about 8.5 Kms in length and the width in the NW part is about 4 Kms and it diminishes and tappers out towards south-west. It forms a triangular shaped body tapering towards south-east. The eastern contact of this triangular body with underlying shales is gradual whereas the western contact of limestone with shales is faulted.

The limestone in general strikes NNW-NW-SE with dips varying from 50 to 300 on either side. It can be clearly

seen from the attitude of bed and their dips that the carbonate rocks are folded. These carbonate rocks exhibit a broad asymmetrical syncline plunging towards north-west. The limbs trends NW-SE with opposite dips varying from 50 to 300. The western limb which is faulted against the shales shows steep dips near the contact varying from 200 to 400 whereas the eastern limb the eastern limb shows gentle dips varying from 50 to 100. The limestone and associated dolomitic/argillaceous limestone occurring to the south of Penganga River in Naranda-Pimpri-Wanoja covers about 25 Sq Km area. It is about 8.5 Kms in length and the width in the NW part is about 4 Kms and it diminishes and tappers out towards south-west. It forms a triangular shaped body tapering towards south-east. The eastern contact of this triangular body with underlying shales is gradual whereas the western contact of limestone with shales is faulted. The limestone in general strikes NNW-NW-SE with dips varying from 5° to 30° on either side. It can be clearly seen from the attitude of bed and their dips that the carbonate rocks are folded. These carbonate rocks exhibit a broad: asymmetrical syncline plunging towards north-west. The limbs trends NW-SE with opposite dips varying from 5° to 30° The western limb which is faulted against the shales shows steep dips near the contact varying from 20° to 40° whereas the eastern limb the eastern limb shows gentle dips varying from 5° to 10°.

The area indicates the following Structural Elements associated with Penganga Beds:

Bedding: It is distinct in both shales and carbonate rocks. The shales are thinly laminated whereas limestones are generally thickly bedded except where it is intercalated with argillaceous limestone.

Joints: The shales and limestone have developed a number of vertical to sub-vertical joints. The prominent among them are NNW-SSE to NW-SE, WNW-ESE, NNE-SSW to NE-SW and ENE to WSW.

Mine is being worked with conventional method of drilling & blasting and blasted limestone is loaded & transported by excavator tipper combination to Limestone Crusher. Multiple benches are being worked to achieve desired quality of limestone.

3.0 BASIC BLAST DESIGN PARAMETERS-

Many factors influence rock breakage by blasting. These factors can be classified broadly into two categories, such as uncontrollable and controllable factors. The uncontrollable factors are the geology and nature of the rock deposit. These are mainly rock and rock mass properties such as lithology, joint and bedding parameters, stress field, water content and different physico-mechanical properties of the rocks. The controllable factors are the basic blast design parameters including explosive properties. The basic blast design parameters and environmental impacts thereof resulted in a blasting operation are described in the following section.

3.1 Bench Height

The selection for an optimum bench height and width depends on inherent stability of the formation, thickness of the formation, drilling and loading equipment to be deployed etc. Higher bench height required more blast hole length and larger drill diameter. This could also result in ground vibration and fly rock problems when the dwelling areas and different structures are existed near by the blasting site.

3.2 Hole Diameter

The choice of blast hole diameter depends mainly on fragmentation size required, bench height and geology of the formation. It also depends on the overall economics in relation to the initial investment and the operating cost. Better and finer fragmentation could be achieved with smaller hole diameter. Control of ground vibration and flyrock are also much easier in smaller diameter than larger hole diameter. However, drilling cost generally increases as blasthole diameter decreases.

3.3 Hole Depth

The required hole depth depends on the bench height, inclination of hole and sub-grade drilling. Sub-grade drilling, on the other hand, depends on the strata condition at the toe portion. With a horizontal bedding plane and softer formation at the toe, use of sub-grade drilling may not be necessary. However, with higher dip of bedding plane or presence of harder strata at the toe portion, more sub-drilling length is required to avoid toe problem and irregular floor. Length of sub-grade drilling generally varies between zero and 0.3 times the burden.

3.4 Burden and Spacing

Burden is the minimum distance from the axis of a blast hole and the free face whereas spacing is the distance between consecutive blast holes in the same row. The values of burden and spacing depend upon blasthole diameter, properties of rock and explosive, bench height and the desired degree of fragmentation as well as muck displacement. Depending upon the properties of rock mass, burden value generally varies between 25

and 40 times the hole diameter. Different researchers to calculate burden value have suggested numerous formulas. Out of these formulae, the most commonly used equation for the calculation of burden value as given by Konya and Walter (1990) is:

$$B = \left[\frac{2\rho_e}{\rho_r} + 1.5\right] \times D_e$$

Where,

B = Burden in inches

 ρ_e = Specific gravity of explosive

 ρ_r = Specific gravity of rock

D_e = Diameter of explosive in inches (for bulk explosive, it is the diameter of drill hole)

The value of spacing is calculated in function with the burden, delay timing between blastholes and the initiation sequence. In general, spacing value varies between 1.2 and 2.0 times the burden value.

3.5 Stemming Length

Stemming is the portion of blast hole which has been packed with inert material above the charge so as to confine and retain the gases produced by the explosion before the actual burden movement. Stemming length depends upon the nature of rock blasted, required throw, fragmentation as well as the type and size of stemming materials. Stemming length can be varied widely, ranging between 20 and 60 times the hole diameter. Whenever possible, stemming length of more than 25 times the blasthole diameter should be maintained in order to avoid flyrock, air blast, cutoffs and overbreak.

3.6 Explosive Type

The type of explosives to be used depends on properties of rock to be fragmented, ground water condition and availability in market. In hard and massive formations, explosive with higher density and higher strength is required for proper fragmentation. However, in softer formation and heavily jointed rock mass, low density explosive with lower strength may be used.

3.7 Specific Charge/Powder Factor

The quantity of explosive (kg) required to fragment one cubic metre of rock is called as specific charge or charge factor (kg/m3). The specific charge increases with an increase in diameter of blasthole, rock strength, degree of fragmentation, displacement and desired swelling. The wide range of specific charge for different types for rock in case of surface bench blasting is given in Table-1. In some places, specific charge is also

termed as charge factor (kg/m3)

Types of rock	Specific Charge (kg/m3)
Massive and high strength rock	0.60- 1.50
Medium strength rock	0.30- 0.60
High fissured rocks, weathered or soft	0.10- 0.30

Table-1: Ranges of specific charge for bench blasting in surface mines (after Jimeno et al., 1995)

4.0 IMPACT OF BLASTING TO SURROUNDING ENVIRONMENT

Only 15-30% of the total energy generated from the detonation of an explosive charge inside a blasthole is estimated to be used for the actual rock breakage. Rest of the energy is wasted in the form of ground vibration, noise and flyrock. These are the main environmental impacts resulted from surface blasting operations. Toxic fumes generated from blasting can also affect the working environment, especially in underground mines, tunnel, etc. However, this effect is less environmental concerned in case of surface blasting in comparison to ground vibration, flyrock and noise. Hence, fundamental concepts on these three environmental impacts created by surface blasting are discussed in this section.

4.1 Blast Induced Ground Vibration

When an explosive charge inside a blasthole is detonated, the explosive is converted into a hot gas at intense pressure. A steep wave front travels into the rock, crushing it for roughly twice the radius of the original blasthole, depending upon the resistance of the rock (Figure-2). In many rock types, the cavity that is formed has about four times the volume of the original hole around the charge. Many radial cracks start to form as the cavity expands. However, a few of the cracks become dominant and the other stop growing. The expanding gases continue to work on the rock, extending the cracks, and moving the rock upward and outward. This activity takes place in the zone of intended work on the rock, breaking it and moving it for excavation. Beyond the perimeter of damaged rock zone, the pulses are called elastic waves or seismic waves, meaning that there is no further damage to the rock or any permanent displacement of the rock properties. Seismic waves generated from blasting source travel in all directions. As they travel through the medium, they cause particle of the medium in motion which is called vibration.

- 1. Crushed Zone
- 2. Severely Fractured Zone
- 3. Moderately Fractured Zone
- 4. Least Fractured Zone
- 5. Seismic Zone/Elastic Zone




Figure-2: Different Zones of rock deformation around a blast

The velocity of a particle at any instant of time during the vibration disturbance is called as particle velocity. The maximum velocity from the position of rest is peak particle velocity or in short 'PPV'. PPV has traditionally been used as a mean to establish the degree of blast damage.

4.2 Factors Affecting Vibration Intensity and Characteristics

The intensity and characteristics of ground vibration generated from a blasting source depend upon different parameters such as:

- Local geology
- Charge weight per delay
- Distance from the point of blast
- Delay period
- Spatial distribution of explosive charge
- Confinement
- Type of explosive

The local surrounding geology has a great influence on the intensity and characteristics of ground vibration. The frequencies of seismic waves produced from blasting mainly depend on nature of the transmitting medium and the distance of measurement. If geological formation of the rock strata in a particular area is having massive formation with shallow soil cover, the blast vibration will be characterized by relatively lower frequencies. However, if the area around the blasting site has a deep covering of soil and jointed rock formations, the vibration will be characterized by relatively lower frequencies and larger displacement. Also with increasing the distance, high frequency waves attenuate and only lower frequency wave can travel to a larger distance. The magnitude of ground vibration also increases with decrease in distance of observation from the blasting source and vice-versa. In a blast where more than one period number of detonators is used, the largest charge per delay has the most direct influence on vibration intensity and not the total charge used for the blast, as long as the delay interval is sufficient to avoid constructive interferences between the waves generated by the different group of holes (Jimeno et al., 1995). A delay interval of 8 and 9 ms were suggested by Duval & Petkof (1959) and Duval & Fogelson (1962) to eliminate constructive interferences of different seismic waves generated from blasting. For the same charge weight per delay, vibrations produced from a single large hole diameter would be more than those generated from more number of holes with smaller diameter due to the spatial distribution of explosive charge (Oriard, 2002).

The confinement of explosive charge such as more burden and spacing values, deeply buried charge (excessive stemming length) and presence of blasted material at the face (choked face) generally increase the level of ground vibration. Explosives having lower borehole pressures also produce lower vibration than those

explosives having higher strength with more detonation pressure.

4.3 Ground Vibration Standards in India

Peak particle velocity (PPV) is mainly used to form the basis of blast damage criteria for different types of structures. The prescribed permissible limits of the Directorate General of Mines Safety (DGMS) on ground vibrations for different type of structures depending on the frequency of blast waves (Technical Circular No. 7, 1997) are given in Table 5.1. The ground vibration standards have also been given by the Indian Standard of Institution (IS: 6922) on the basis of the ground condition as given in Table-2. The IS:6922 (1973) is applicable to normal structures like building, elevated structures, bridges, retaining walls, concrete and masonry dams constructed in materials like brick walls, stone masonry and concrete.

Table-2: DGMS-prescribed permissible limit of ground vibrations (Technical Circular No. 7, 1997)

Type of structure		Dominant excitation frequency, Hz		
		< 8 Hz	8 - 25 Hz	> 25 Hz
(A) Buil	dings/structures not belonging to the owner			
i)	Domestic houses/structures (Kuchha brick and cement)	5	10	15
ii)	Industrial Buildings RCC and framed structures)	10	20	25
iii)	Objects of historical importance and sensitive structures	2	5	10
(B) Buil	dings belonging to owner with limited span of life		•	•
iv)	Domestic houses/structures (Kuccha brick and cement)	10	15	25
v)	Industrial buildings (RCC & framed structures)	15	25	50

Table-3: Peak Particle velocity as damage criteria for different types of rocks (after Indian Standard Institution, IS:6922, Sec. 4.1.1.2, 1973)

Soil, weathered or soft rock condition	70mm/sec
Hard rock condition	100mm/sec

4.4 General Control Measures to Reduce Ground Vibration


The followings are some of the principal reasons that can be considered for reducing blast generated ground vibrations.

- Minimizing the explosive charge per delay by reducing drill hole diameter, blasthole depth, decking the explosive charges in a hole and initiating them at different times.
- Reduce the number of blast holes having instantaneous detonators by using a greater number of


- delay detonators.
- Choose effective delay time between holes and rows which avoid wave interaction and give good rock displacement.
- Set the initiation sequence in a way that it progresses away from the structures to be protected.
- Maintain bench height to burden ratio more than two and use adequate powder factor to decrease over confinement of explosive charge.
- Use the largest possible free face blast area and avoid choked face blasting.

4.5 Fly-rock


Fly-rock, also called rock throw, is the uncontrolled propelling of rock fragments produced in blasting. Flyrock constitutes one of the main sources of material damage and harm to people. The possible causes of flyrock, which are commonly encountered during any bench blasting in surface mine, are depicted in Figures-3 (A to G).




(a) Inclined hole causing less toe burden




(b) Under confined at the toe




(c.) Too less front burden




(d) Too large front burden





(e) Cavity, open joint and mud seam

(f) Excessive charge and very small top stemming



(g) Inadequate delay timing (back rows)

Figure-3: Common causes of fly rock in surface bench blasting

The control measures of fly rock in surface blasting operation are given below-

- The primary means of controlling fly rock is through proper blast design and delay timing. The
 consistency of the burden, specially the front burden (distance between first row to free face) must be
 maintained.
- Bench height to burden ratio less than 1.5 should be avoided. The spacing of about 1.2 2.0 times the burden is suggested to reduce the fly rock.
- While loading a shot, the blaster must be aware of his true powder factor (in m3/kg i.e. reverse of charge factor) in terms of the amount of explosive to be charged for the quantity of rock to be fragmented. Charging of excessive explosive quantity must be avoided.
- When firing more than one row of holes, sufficient delays should be used between the two sequence
 of rows of holes. Based on the observations, delays of at least 50 ms or more should be used between
 two consecutive rows.
- Length of stemming column should be greater than or at least equal to 25 times the hole diameter.

 For better protection, it may also be taken as greater than or equal to the burden.
- The blasting site should always be inspected before marking the holes. If any open joints and clay

fillings are present in the bench, an adjustment should be made in the drilling pattern.

Before loading, blasting officials should always check the hole depths and ensure that the holes are
drilled as per the blast design. Any change in the blast design should be carefully considered from the
standpoint of its potential effect on fly-rock.

• All loose pieces of rock from the blasting site should be cleared before charging.

 Accidents due to lack of blast area security are commonly caused in the mines due to following reasons, which should be strictly taken care of in all the blasting operations.

Failure to evacuate the blast area by employees and visitors,

• Failure to understand the instructions of the blaster or supervisor,

Inadequate guarding of the access roads leading to the blast area,

Taking shelter at an unsafe location or inside a weak structure.

4.6 Blast-induced Noise/air overpressure

Noise or air blast/air overpressure is considered to be one of the most hazardous environmental disturbances created by blasting operation. Blast induced air overpressure is the energy transmitted from the blast site within the atmosphere in the form of a series of pressure waves. Overpressure simply means the pressure over and above that of atmospheric pressure being present and the term air overpressure is used to describe the airwave generated by blasting. Air overpressure is formed either by the direct action of the explosion products from an unconfined explosive in the air or by the direction of a confining material subjected to blast loading. The pressure wave consists of both audible (noise) and sub-audible (concussion) energy. The maximum excess pressure in this wave is known as the peak air overpressure, generally measured in decibels (dB) using the linear frequency-weighting (L). The decibel is defined in term of air overpressure with the equation:

$$AOP = 20 \times log \left[\frac{P}{P_o} \right]$$

Where,

AOP – Air over pressure in dB

P- Measured overpressure in N/m²

 P_o – Pressure of the lowest audible sound (2.0 x 10^{-6} N/m²)

Factors Affecting Air overpressure

Oriard (2002) listed out the various factors contributing to air overpressure and arranged roughly in order of decreasing importance as follow:

- Maximum charge weight per delay
- Depth of burial of the explosive charges
- Exposed detonating materials on the ground surface
- Atmospheric condition
- Topography
- Volume of displaced rock
- Delay interval and orientation

4.7 Air overpressure Standards

Air overpressure generated due to blasting generally causes minor structural damage such as glass window breakage. No major structural damage is usually reported due to air overpressure unlike in the case of ground vibration. Presently, no standard / regulation or guidelines are available in India by the regulatory agencies regarding the permissible levels of air overpressure and noise from blasting operation. The typical air overpressure limits as given by Oriard (2002) and the limits recommended by United States Bureau of Mines (USBM) for surface mine blasting are given in Table-4 and Table-5 respectively. Table-6 shows Central Pollution Control Board (CPCB), India's permissible levels for noise exposure for work zone area as prescribed under Model Rules of Factories Act, 1948.

Table-4: Typical air overpressure criteria (after Oriard, 2002)

171 dB	General window breakage
151 dB	Occasional window breakage
140 dB	Long term history of application as a safe project specification
134 dB	Bureau of Mines recommendation following a study of large-scale surface mine blasting

Table-5: Air overpressure limits recommended by USBM for Surface mining (RI 8485)

134 dB	0.1 Hz high pass measuring system			
133 dB	2.0 Hz high pass measuring system			
129 dB	6.0 Hz high pass measuring system			
105 dB	C-slow weighting scale on a sound level meter			
(Event less than or equal to 2 sec duration)				

Table-6: Central Pollution Control Board (CPCB) permissible levels for noise exposure for work zone area

Peak sound pressure in dB	Permitted number of impulse or impact/day
140	100
135	315
130	1000
125	3160
120	10000

Note:

- 1. No exposure in excess of 140 dB peak sound pressure level is permitted.
- 2. For any peak sound pressure level falling in between any figure and the next higher or lower figure as indicated in column 1, the permitted number impulses or impacts per day is to be determined extrapolation on a proportionate basis.

General Control Measures to Reduce Noise/Air overpressure

- Increase confinement of explosive charge (i.e. burial depth of explosive) with longer stemming height (greater than 25 times the blast-hole diameter) and avoid shallow hole depth and plaster shooting.
- Minimize explosive charge weight per delay by using proper delay to reduce direct influence on air overpressure.
- Choose delay times so that the blast progresses along the face velocity lower than that of sound in the air (320 m/s).
- Avoid using detonating cord, and when it is completely unavoidable, cover it with sand/soil/drill cuttings of a minimum thickness of 10 to 15 cm.
- Never conduct blasting when the direction of the wind is critical.
- Avoid blasting in cloudy weather.

5.0 Field Investigation-

The field investigation was conducted in 23rd January, 2024 to identify and study different structure present nearby mining lease as well as distance from existing and proposed mining areas was measured. The distance of structure present in naranda village were tabulated in table-7.

Structure	Distance from lease boundary		
Naranda School Building	173m		
Naranda School Boundary	113m		
Kuccha House	121m		
Naranda Village Overhead water tank	146m		

Table-7: List of Structure not belonging to owner and its distance

Whereas, Dalmia Cement Plant is partially situated in mining lease boundary, the distance of 1st active mine bench to plant boundary is 35m and distance from last bench to plant boundary is 160m belonging to owner. The study is conducted for the proposed development toward naranda village with drilling and blasting as different types of structure present nearby proposed working that requires protection from blasting impact viz. ground vibration, fly-rock and air overpressure/noise. As to determine the predictor for maximum charge per delay (MCPD), total charge per round and air overpressure. total 12 experimental blast in active mining area was conducted with technical support provided by AKS University Team. Physical inspection around the structure present in naranda village not belong to owner was examined, there was no cracks or instability sign were present in overhead water tank, in naranda school building and in kaccha house. To understand the vibration, AOP and frequency near to structure an instantel make minimate was also fixed and recording for each blast were recorded, where as a another instantel make micromate was fixed around 300m near to weigh bridge belonging to owner.



Figure-4: Google Map showing structure not belonging to owner near to lease boundary

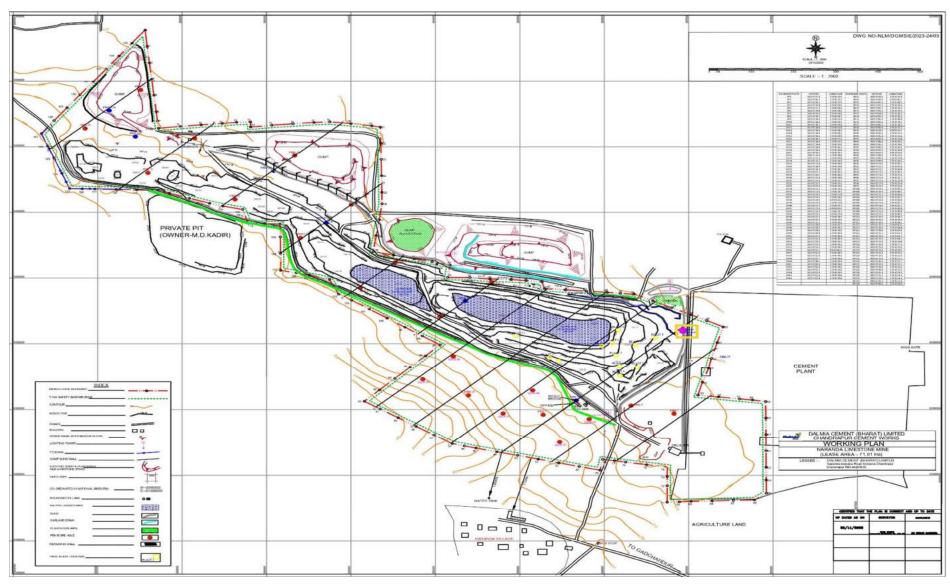


Figure-5: Surface plan showing experimental blast location and location of instruments



Figure-6: Meeting along team member of AKSU and Dalmia Cement Management



Figure-7: Charge of Explosive at third bench OB in presence of AKSU Technical Support Team.





Figure-8: Charging in progress with Technical Support from Figure-9: View of Mine Benches and Plant of Dalmia **AKS University Team**

Cement, Chandrapur



Figure-10: Stemming & Connection of TLD's in presence of technical Support team



Figure-11: View of Charging in 4th bench



Figure-12: Measurement of drill hole parameters

Table-8: Summary of experimental blasts -

							Instrument-1 Instrument-2 (Location- Near to mine Weigh Bridge) (Location- Near to Plant Bounda						(Location- Near to mine Weigh Bridge) (Location			oundary)	
Date	Blast ID	Blast Time	No. of Holes	Burden x Spacing	Hole Depth	Charge Length (m)	Stemming Height (m)	Maximum Charge per Delay(kg)	Charge per blast (kg)	PPV (mm/sec.)	Frequency (Hz)	AOP (dB)	Distance of Instrument from Blast site (m)	PPV (mm/sec.)	Frequency (Hz)	AOP (dB)	Distance of Instrument from Blast site (m)
23-01-2024	B-1	14:15	21	2.5x3	5	3.5	1.5	25	525	4.597	21	114.7	286	5.75	5.00	120.00	390
23-01-2024	B-2	14:17	20	2.5x3	5	3.5	1.5	25	488.89	2.689	17.1	108.8	314	7.66	6.40	121.70	165
23-01-2024	B-3	14:21	20	2.5x3	5	3.5	1.5	25	500	4.307	22	112.6	273	5.52	7.60	129.90	173
23-01-2024	B-4	14:31	20	2x3	5	2.7	2.3	19.46	389.2	1.119	18.3	104	270	-	-	-	-
23-01-2024	B-5	14:37	19	2x3	5	2.7	2.3	19.46	369.74	5.256	14.4	109.4	312	3.10	5.20	123.10	177
23-01-2024	B-6	14:45	20	2x3	5	2.7	2.3	19.46	352.18	2.357	47	109.8	244	-	-	-	-
24-01-2024	B-7	13:51	20	2.5x3	5	3.5	1.5	25	500	2.349	17.7	117.3	260	3.86	7.5	124.50	142
24-01-2024	B-8	13:55	20	2.5x3	5	3.5	1.5	25	475	1.164	19.7	110.8	306	7.45	6.5	124.50	110
24-01-2024	B-9	14:03	20	2x3	5	2.5	2.5	16.68	325	1.931	18	106.6	250	-	-	-	-
24-01-2024	B-10	14:11	20	2.5x3	5	3.5	1.5	25	475	1.217	19	115.7	342	-	-	-	-
24-01-2024	B-11	14:16	20	3x4	5	2.4	2.6	16.68	325	2.175	25	115.6	280	3.21	7.1	120.30	303
24-01-2024	B-12	14:22	20	3x2	5	1.9	3.1	13.90	275	3.174	21	114.3	250	2.14	5.5	123.1	326

6.0 Empirical relationship between ground vibration, distance and explosive charge:

Peak particle velocity (PPV) is generally a direct function of the maximum charge per delay called "Scaled Distance" and is negatively related to the distance between the blasting point and the recording point. To find a mathematical expression of the determination of the laws of transmission of vibrations, the "scaled distance," which is defined as the relation between the distance and the energy of the explosive charge, was used. The scaled distance was calculated as-

$$SD = \left(\frac{D}{\sqrt{Q}}\right)$$

Where.

SD- is the scaled distance,

D- is the distance between the emitted point and received point in m, and

Q- is the amount of maximum charge per delay in kg

The empirical relation between the PPV and the scaled distance is then obtained, which takes the following form:

$$PPV = k*(SD)^{\alpha}$$

The values obtained for PPV and SD are plotted to determine the value of the constants K and α , which will depend on geological conditions. Then, the equation of the regression curve that best fits the plot is obtained. The law of transmission of ground vibration was obtained using the data from Table no-8.

Table-9: Summary of blast Recorded data (12 observation)-

Parameter	Class Interval	No. of events	Range	Remark	
Maximum	0-50	12	13.90 to 25	Malein skin deke dilimite	
Charge Per Delay (kg)	>50	-	-	Within stipulated limits	
PPV	<10	12	1.119 to 7.660	Makin akin daka dilimika	
(mm/sec.)	10-20	-	-	Within stipulated limits	
Distance (m)	100-500	12	110- 390	-	
Frequency	<8Hz	8	5.2 to 7.60	Instrument-2 Readings near to plant boundary	
(Hz)	8-25Hz	12	17.1 to 25	Instrument-1 readings near to Mine weigh bridge	
A.O.P. (dB)	<88 to 130	20	104 to 129.90	All the events are safe limit below then	
A.O.P. (UB)	131 to 140	-	-	130 dB (Including Inst-1 & 2).	

7.0 Development of Ground Vibration and AOP Predictor Equations-

In order to develop ground vibration predictor equations, the ground vibration data obtained from those blasts conducted with 110 mm blast hole diameter have been selected from the above-mentioned different mines. The values of maximum charge per delay varied between 13.90 and 25 kg and total explosive charge varied between 275 and 525 kg. The distances of ground vibration monitoring points ranged between 110 and 390 m. Regression analyses have been carried out by correlating maximum charge per delay, total explosive charge and distance from the vast data to develop the best-fit ground vibration predictor equations and air overpressure as given in Figures-13 to 16. The predictor equations obtained for ground vibration and air overpressure are given in Equations 13 to 16.

7.1 Ground Vibration Predictor equation using Q_{max}-

Ground vibration predictor equation for max charge per delay (Q), D is the Scaled Distance:

PPV =182.6*
$$(\frac{D}{\sqrt{Q}})^{-0.783}$$

Coefficient of determination – 0.258 Standard Deviation - 0.212

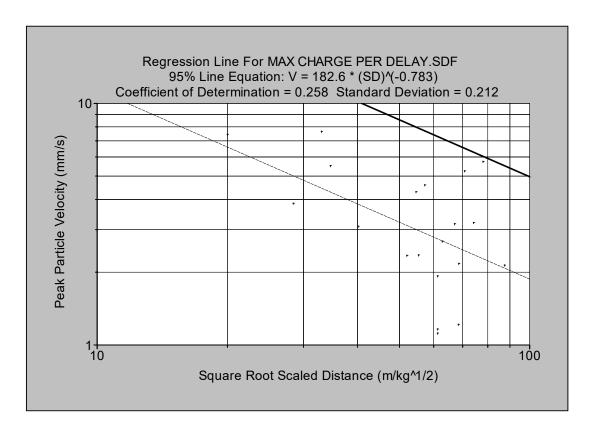


Figure-13: Regression analysis result for ground vibration prediction using maximum charge per delay (Q_{max})

7.2 Ground Vibration Predictor equation using Qtotal -

Ground vibration predictor equation for Total charge per round (TQ), D is the Scaled Distance:

PPV = **60.31***
$$(\frac{D}{\sqrt{Q}})^{-0.810}$$

Coefficient of determination – 0.273

Standard Deviation- 0.210

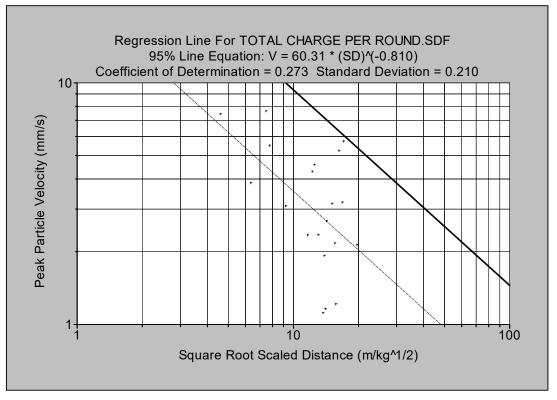


Figure-14: Regression analysis result for ground vibration prediction using total charge per round (TQ)

7.3 Air Overpressure (AOP) Predictor equation using Q_{max}-

AOP predictor equation for Maximum charge per delay (Q_{max}), D is the Scaled Distance:

$$V = 187.9* \left(\frac{D}{\sqrt[3]{Q}}\right)^{-0.085}$$

Coefficient of determination – 0.264

Standard Deviation - 0.022

Where,

V = Peak particle velocity in mm/s,

AOP = Air overpressure/air blast/noise in dB(L),

D = Distance of vibration monitoring point from the blast face in m,

 Q_{max} = Maximum explosive weight per delay (kg),

Q_{total} = Total explosive charge in the blasting round (kg).

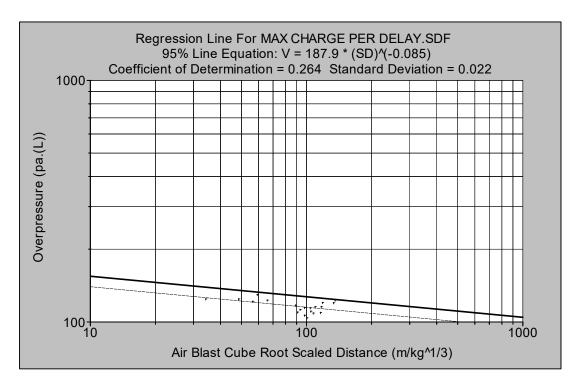


Figure-15: Regression analysis result for AOP prediction using maximum charge per delay (Q_{max})

7.4 Air Overpressure (AOP) Predictor equation using Qtotal -

AOP predictor equation for Maximum charge per round (Qtotal), D is the Scaled Distance:

$$V = 173.7* \left(\frac{D}{\sqrt[3]{Q}}\right)^{-0.087}$$

Coefficient of determination – 0.273 Standard Deviation - 0.022

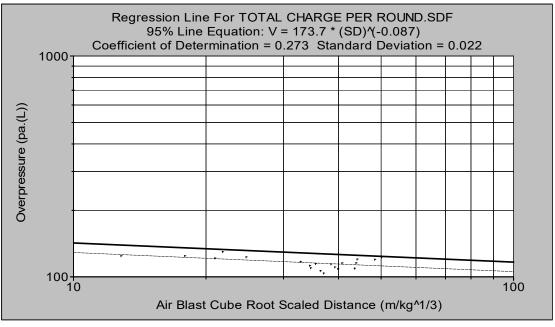


Figure-16: Regression analysis result for AOP prediction using Total charge per round (Qtotal)

8.0 Assessment of ground vibration impact-

Based on mining plan, the bench height is being maintained is 5m and drilling diameter is 110mm. due to medium hard rock formation in OB/limestone benches. The maximum charge per delay may vary between 15kg to 25kg. hence, prediction for ground vibration with consideration of Maximum charge per delay variation between 15kg to 25kg are calculated using determined predictor. Resulted PPV with variation in distance are tabulated below-

Distance	Ground vibration (PPV) in mm/s generated by different values of Max. charge per delay at different distances					
	Max charge- 15kg	Max charge- 20kg	Max charge- 25kg			
50	24.64	27.58	30.10			
100	14.32	16.03	17.49			
150	10.42	11.67	12.73			
200	8.32	9.31	10.16			
250	6.99	7.82	8.54			
300	6.06	6.78	7.40			
350	5.37	6.01	6.56			
400	4.84	5.41	5.91			
450	4.41	4.94	5.39			
500	4.06	4.55	4.96			
550	3.77	4.22	4.60			
600	3.52	3.94	4.30			
650	3.31	3.70	4.04			

Table-10: Predicted values of ground vibrations produced by different maximum charge per delay

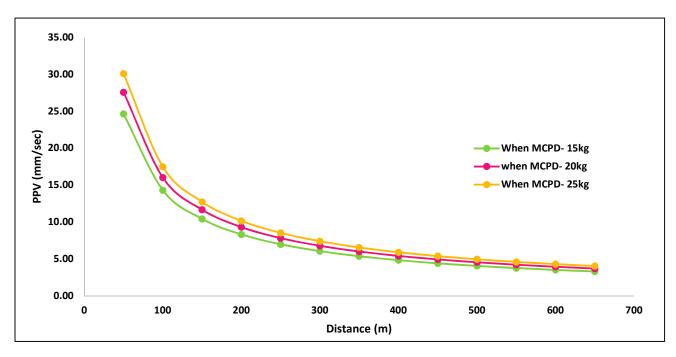


Figure-17: Predicted value of ground vibrations at different distances for different values of maximum charge per delay

8.1 Calculation of MCPD & MCPR -

Based on experimental blast recording, low frequency (<8Hz) is recorded towards plant boundary, whereas frequency 8-25 Hz are recorded by instrument fixed in naranda village site near to weigh bridge. Hence plant structure is belonging to owner and it is industrial building of RCC & framed structures as per DGMS circular no-7 of 1997 permissible peak particle velocity at the foundation level shall be 15mm/sec. whereas naranda school structure and houses are not belong to owner shall have permissible PPV at the foundation level 10mm/sec when dominant excitation frequency ranges between 8-25Hz as recorded. Therefore, the safe values of PPV for different structures have been assigned based on DGMS standards and are given in table no-11.

SI. No.	Structure	Safe level of PPV
1.	Buildings/structures not belonging to the owner (Domestic houses/structures (Kuchha brick and cement)	10mm/sec
2.	Buildings belonging to owner with limited span of life Industrial buildings (RCC & framed structures)	15mm/sec

Table-11: Threshold level of PPV for different structures near the ML Area.

Table-12: Predicted Safe MCPD (Maximum charge per delay)-

Distance of the structure from the blasting face	For village house/structure permanent in nature and not belonging to owner (safe Level of PPV- 10mm/sec)	For building /structure with limited span of life and belonging to owner (safe level of PPV- 15mm/sec)	
[m]	[kg]	[kg]	
100	6.00	16.90	
150	13.50	38.04	
200	24.00	67.63	
250	37.51	105.69	
300	54.01	152.20	
350	73.53	207.18	
400	96.04	270.63	
450	121.56	342.53	
500	150.08	422.91	

Table-13: Predicted Safe MCPR (Maximum charge per round)-

Distance of the structure from the blasting face	For village house/structure permanent in nature and not belonging to owner (safe Level of PPV- 10mm/sec)	For building /structure with limited span of life and belonging to owner (safe level of PPV- 15mm/sec)
[m]	[kg]	[kg]
100	118.35	322.09
150	266.29	724.71
200	473.42	1288.39
250	739.72	2013.13
300	1065.21	2898.94
350	1449.88	3945.80
400	1893.73	5153.74
450	2396.77	6522.74
500	2958.99	8052.81

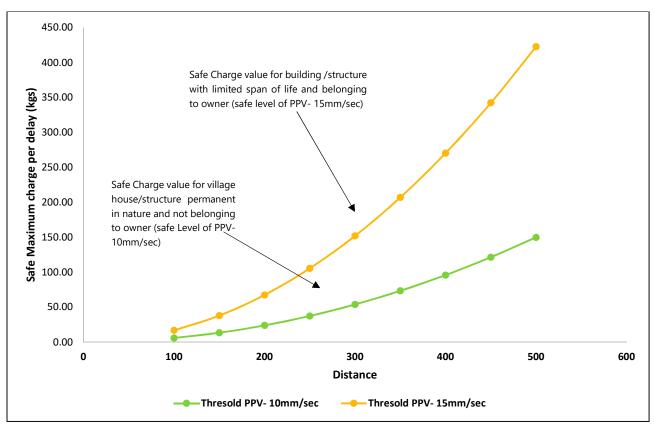


Figure-18: Safe values of maximum charge per delay for various distances determined from the ground vibration predictor equation

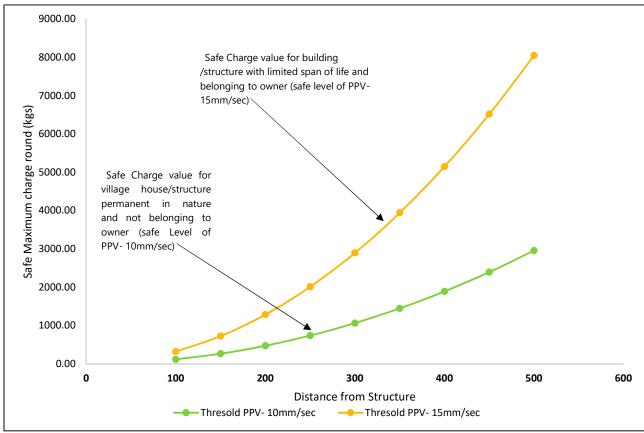


Figure-19: Safe values of maximum charge per round for various distances determined from the ground vibration predictor equation

8.2 Assessment of impact of Noise/Air-overpressure-

The predicted levels of air overpressure generated by different maximum charge per delay varying from 15.00 to 25.00 kg for Naranda Limestone mine is given in Table-14 and Figure-20. The levels of air overpressure at the distance of 100 m is more than 140dB(L), whereas, at the distance of 150m from blast site. It has been predicted that AOP is resulted less than 140dB(L) with reference to CPCB guideline (table-6), when maximum charge per delay ranges between 15kg to 25kg. There are no sensitive structures made of glass frames in the Naranda village which are vulnerable to air overpressure. Hence, in view of air overpressure/noise, blasting operations can be carried out safely without causing any structural damages at proposed development of Naranda limestone Mine.

Table-14: Predicted values of air overpressure/noise produced by different maximum charge per delay-

Distance	Air overpressure/noise in dB(L) generated by different values of Max. charge per delay at different distances						
	Max charge- 15kg	Max charge- 20kg	Max charge- 25kg				
100	142.53	144.28	145.66				
150	137.70	139.40	140.73				
200	134.38	136.03	137.33				
250	131.85	133.47	134.75				
300	129.82	131.42	132.67				
350	128.13	129.71	130.95				
400	126.69	128.25	129.47				
450	125.43	126.97	128.18				
500	124.31	125.84	127.04				
550	123.30	124.82	126.01				
600	122.40	123.90	125.08				
650	121.57	123.06	124.23				

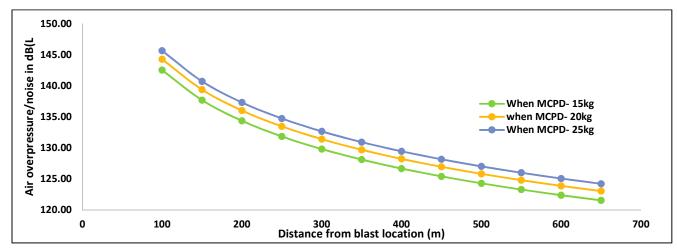


Figure- 20: Predicted value of air overpressure (AOP) at different distances for different values of maximum charge per delay.

9.0 Recommendations-

1. Drill Hole Diameter-

Drilling hole diameter of 110 mm is best suited for 5m height benches. For 110 mm diameter blast hole the true burden may be 2.0 to 2.5 M & spacing of 3 to 3.2 m.

2. No. of Rows -

During the experimental blast the length of the blast was more than the width of the blast. In most blasts length of the blasting block has been more than the width of the blasted block. In these cases, number of rows can result PPV within laid down norms and a maximum of 2 to 3 rows are recommended.

3.0 Initiation arrangements/tie-lines -

NONEL which has been used is best suitable to contain blast induced ground vibration and air blast. Besides, it also gives very good fragmentation, less back break, and controlled throw on free face. The delay between the hole may be kept as 17ms and between rows may be 42ms (Refer attached figure).

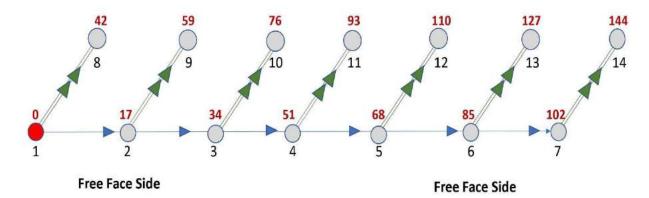


Figure-21: Two Row Blast Pattern with delay

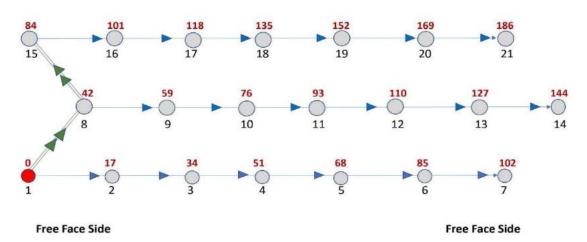


Figure-22: Three Row Blast Pattern with delay

- Misfires can be eliminated with the use of NONEL or shock tubes.
- Using a high delay interval of 450 MS down-the-hole delay with 17MS surface delay

ensures that the detonation of the surface tie line would be several rows or blast holes ahead before the first blast hole gets initiated (after 450ms) and ground movement starts subsequently. This makes the blast free from any misfires due to initiation resulted by cut-off of in hole or downline initiator due to ground movement.

- Initiation pattern While drilling holes staggered pattern may be adopted. It has been
 observed that staggered pattern with equilateral triangular give better fragmentation as
 compared to square pattern.
- Period of blast The total period of blast from the initiation of the first hole to the last hole should preferably be not more than 1000 Ms.

Before commencing Drilling:

(a). Face preparation before commencement of drilling -

The bench must be properly dozed to ensure no flying fragments of the previous blast or boulders are present. On the free face side, the face needs to be dressed properly so that no loose overhangs are present. The shotfirer must mark the location of holes after measuring the burden and spacing. The driller must report any deviations observed in burden and spacing and hole collapse during withdrawal of the drill rod.

(b). Free Face -

The key to success of any safe blast is the free face. It must be noted that the direction of throw must be towards free face. Whenever two free faces are available, the direction of throw can be diagonal for better muck pile and uniform throw.

(c). Stemming and stemming material-

To hold the post detonation fumes inside the blast hole is essential to ensure movement and breakage of the in-situ rock. The blasting crew should have specially trained workmen who can ensure tight stemming. If watery holes are encountered, it must be dealt with lot of care so as to ensure settlement of explosive and stemming material. In all the blasts dry drill cuttings were used and care was taken to see no damages to the shock tube down-line.

(d). Muffling of holes -

In case of critical areas only sandbags shall be placed over the conveyor belts so as to provide additional

precaution to restrict flying fragments.

(e). Charging of explosives on the last row of holes -

In case of more than 3 rows of blasting on the last row of holes, the quantity of explosive can be reduced by 10 to 15% so as to ensure better stability, reduction in back break, less dressing required before finishing excavation due to less loose overhangs and less overhang areas.

ADDITIONAL PRECAUTIONS:

- Maximum charge per delay and per blast for various distance of structures from blasting site may be estimated using equation stated above.
- Blasting Report showing hole number, location on the rows, depth, meterage of water inside
 the hole (if any), burden and spacing need to be prepared before commencement of
 lowering the booster and cartridge explosive. For any holes having less depth quantity to
 be adjusted accordingly keeping stemming height unchanged.
- Blast Area Security The mine management shall strictly abide by blasting time and adequate number of guards shall be posted around the blast site to prevent inadvertent entry of persons. All the machineries shall be parked at safe distances following parking norms of each machinery. Sirens shall be blown to warn persons of nearby areas about blasting operations.
- The engineer concerned must move to the shelter after setting the instrument with proper time lags etc.
- Secondary Blasting should not be conducted and is not practiced. oversize boulders are broken and toes are removed by hydraulic rock breakers.
- Safety awareness and training needs of the blasting crew The mine management shall hold training programs for engineers and statutory persons to deliberate on various aspects of blast design, charging, field management, blast area security, provisions of MMR 1961, and other guidelines.
 Blasting crew shall have adequate knowledge of safe handling, charging, stemming, priming, tie-line hook up of explosive, following the siren etc.
- PPE all persons engaged in blasting shall be provided with PPE and other essential gadgets like whistle, red flags and hand gloves etc.

10.0 Conclusion:

The report presents the details of the experimental blasts carried out using cartridge explosives, for validating the blasting pattern and allowable maximum charge per delay and per round based on the ground vibration, air overpressure and other post blast details (like fly rock, muck pile, misfires if any, back break, throw etc).

In view of the successful and safe conduct of the blasts as a part of this Scientific Study, with explosives in cartridge form by following the norms as stipulated in the permission letter granted, it is recommended that the charge/delay and maximum charge of explosive per round as indicated above, and followed by the mine is in line with the provisions of MMR 1961 and also blasting practices can be termed as "Controlled Blasting".

Table-15: Safe Predicted value of MCPD & MCPR-

Distance of the structure from the blasting face	For village house/structure permanent in nature and not belonging to owner (safe Level of PPV- 10mm/sec)	For building /structure with limited span of life and belonging to owner (safe level of PPV- 15mm/sec)
[m]	[kg]	[kg]
100	6.00	16.90
150	13.50	38.04
200	24.00	67.63
250	37.51	105.69
300	54.01	152.20
350	73.53	207.18
400	96.04	270.63
450	121.56	342.53
500	150.08	422.91

Table-16: Blast design parameters as recommended shall be as follows-

Bench Type	Max. No. of Holes per Blast	Blast Hole Diameter	Hole Depth (m)	Burden x Spacing	Length of Explosive
Overburden	20	110mm	5m (Max.)	3.0m x 3.5m	1.9m- 2.0m
Ore/LST	20	110mm	5m (Max.)	2.50m x 3.0m	2.5m- 2.8m

For executing a blast to protect the structure within 150m from the blast location, the maximum charge per delay shall not be exceed 13.50 kg and total quantity of charge per round shall not be exceed 266 kgs. Whereas, considering bench parameters with 5m bench height with 110mm blast hole diameter and structure distance from blast site shall be 150-200m from lease boundary. Following maximum charge

delay and total charge per round shall not exceed as tabulated below-

Table-17: MCPD & MCPR for the various structures near to lease boundary-

Distance of the structure from the blasting face	Maximum charge per delay for village house/structure permanent in nature and not belonging to owner (safe Level of PPV- 10mm/sec)	Total charge per round for village house/structure permanent in nature and not belonging to owner (safe Level of PPV- 10mm/sec)
[m]	[kg]	[kg]
150	13.50	266.29
160	15.36	302.98
170	17.34	342.04
180	19.44	383.46
190	21.66	427.26
200	24.00	473.42

Regular monitoring of blast induced ground vibration and air over pressure shall be carried out for analysis of impact towards Naranda Village structure (Overhead tank & Naranda Govt. School Building) for further optimization in blast parameters to reduce the impact of blasting (if any).

Dr. G.K. Pradhan

Recipient of National Geoscience Awardee

Principal Investigator (PI)

Professor of Mining Engineering & Dean

Faculty of Engineering &Technology (FE&T)

AKS University, Satna (M.P.)



Serial Number

Battery Level



Vert at 14:15:29 January 23, 2024 Date/Time Trigger Source Geo: 0.127 mm/s, Mic: 100.00 dB(L)

Range Geo: 254.0 mm/s **Record Time** 3.0 sec at 2048 sps

Unit Calibration File Name Operator/Setup: AKS UNIVERSITY_SATNA/DALMIA CEMENT.N Scaled Distance N/A

UM20687 V 10-90FB Migromate ISEE 3.7 Volts

October 5, 2023 by UES New Delhi UM20687_20240123141529.IDFW

Notes NARANDA LIMESTONE DALMIA CEMENT Location:

Client: DALMIA CEMENT

User Name: General:


Linear Weighting Microphone PSPL 114.7 dB(L) at 0.806 sec


ZC Freq 6.1 Hz

Channel Test Passed (Freq = 19.7 Hz Amp = 1191 mv)

	Tran	Vert	Long	
PPV	4.595	1.892	3.460	mm/s
ZC Freq	18.3	34	21	Hz
Time (Rel. to Trig)	0.199	0.163	0.152	sec
Peak Acceleration	0.160	0.067	0.127	g
Peak Displacement	0.019	0.008	0.021	mm
Sensor Check	Passed	Passed	Passed	

Peak Vector Sum 4.597 mm/s at 0.199 sec



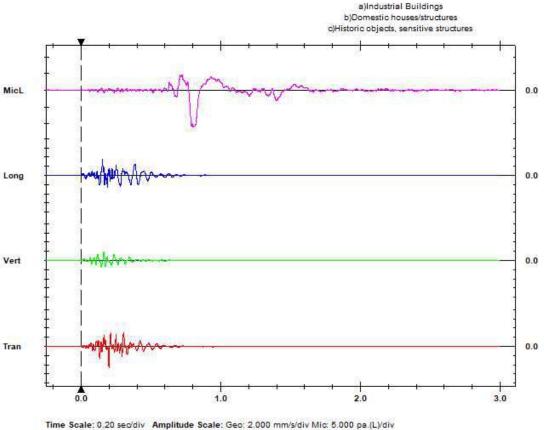

Printed: March 2, 2024 (V 10.72 - 10.72.1)



Serial Number

Battery Level





Vert at 14:17:36 January 23, 2024 Date/Time Trigger Source

Geo: 0.127 mm/s, Mic: 100.00 dB(L) Geo: 254.0 mm/s

Unit Calibration 3.0 sec at 2048 sps File Name

UM20687 V 10-90FB Migromate ISEE

3.7 Volts

October 5, 2023 by UES New Delhi UM20687_20240123141736.IDFW

Operator/Setup: AKS UNIVERSITY_SATNA/DALMIA CEMENT.N Scaled Distance N/A

Notes NARANDA LIMESTONE DALMIA CEMENT Location:

Client: DALMIA CEMENT

User Name: General:

Range

Record Time


Microphone Linear Weighting PSPL 108.8 dB(L) at 0.734 sec

ZC Freq 4.1 Hz


Channel Test: Passed (Freq = 19.7 Hz Amp = 1191 mv)

	Tran	Vert	Long	
PPV	2.640	0.946	1.836	mm/s
ZC Freq	35	30	17.1	Hz
Time (Rel. to Trig)	0.163	0.125	0.206	sec
Peak Acceleration	0.089	0.043	0.059	9
Peak Displacement	0.011	0.007	0.013	mm
Sensor Check	Passed	Passed	Passed	

Peak Vector Sum 2.689 mm/s at 0.163 sec



a)Industrial Buildings

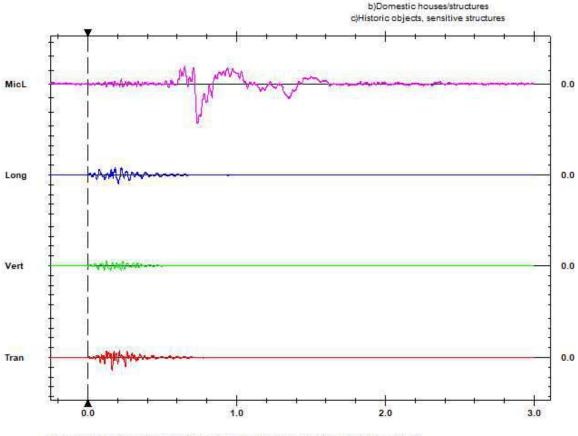

Time Scale: 0.20 sec/div Amplitude Scale: Geo; 2.000 mm/s/div Mic: 2.000 pa.(L)/div

Printed: March 2, 2024 (V 10.72 - 10.72.1)



Serial Number

Battery Level



Date/Time Vert at 14:21:25 January 23, 2024
Trigger Source Geo: 0.127 mm/s, Mic: 100.00 dB(L)

 Range
 Geo: 254.0 mm/s
 Unit Calibration
 October 5, 2023 by UES New Delhi

 Record Time
 3.0 sec at 2048 sps
 File Name
 UM20687_20240123142125.IDFW

Operator/Setup: AKS UNIVERSITY_SATNA/DALMIA CEMENT.N Scaled Distance N/A

DGMS India (A)

3.7 Volts

UM20687 V 10-90FB Micromate ISEE

Notes
Location: NARANDA LIMESTONE DALMIA CEMENT
Client: DALMIA CEMENT

User Name: General:


Microphone Linear Weighting
PSPL 112.6 dB(L) at 0.640 sec


ZC Freq 22 Hz

Channel Test Passed (Freq = 19.7 Hz Amp = 1191 mv)

	Tran	Vert	Long	
PPV	3.618	2.168	3.933	mm/s
ZC Freq	47	25	22	Hz
Time (Rel. to Trig)	0.187	0.078	0.137	sec
Peak Acceleration	0.130	0.058	0.148	9
Peak Displacement	0.012	0.013	0.020	mm
Sensor Check	Passed	Passed	Passed	

Peak Vector Sum 4.307 mm/s at 0.160 sec



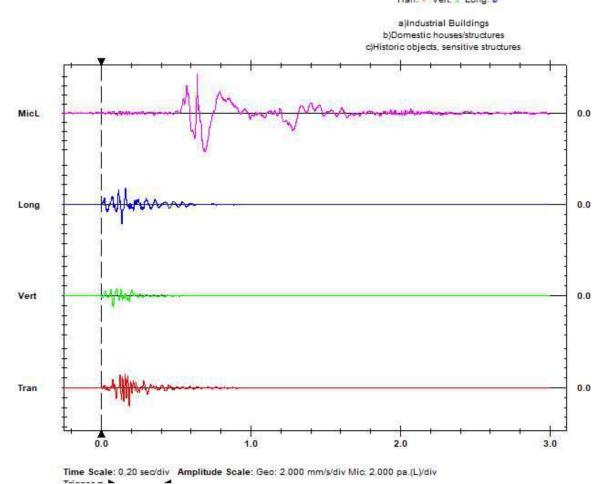

Printed: March 2, 2024 (V 10.72 - 10.72.1)



Serial Number



Long at 14:31:48 January 23, 2024 Date/Time Geo: 0.127 mm/s, Mic: 100.00 dB(L) Trigger Source

3.7 Volts **Battery Level** Range Geo: 254.0 mm/s **Unit Calibration** October 5, 2023 by UES New Delhi 3.0 sec at 2048 sps UM20687_20240123143148.IDFW **Record Time** File Name

Operator/Setup: AKS UNIVERSITY_SATNA/DALMIA CEMENT.N Scaled Distance N/A

Notes NARANDA LIMESTONE DALMIA CEMENT Location: Client: DALMIA CEMENT

User Name: General:


Microphone Linear Weighting 104.0 dB(L) at 0.968 sec PSPL

ZC Freq 5.8 Hz

Channel Test Passed (Freq = 19.7 Hz Amp = 1191 mv)


Tran	Vert	Long	
1.111	0.654	0.788	mm/s
13.7	14.4	18.3	Hz
0.114	0.180	0.188	sec
0.026	0.016	0.030	9
0.011	0.006	0.006	mm
Passed	Passed	Passed	
	1.111 13.7 0.114 0.026 0.011	1.111 0.654 13.7 14.4 0.114 0.180 0.026 0.016	1.111 0.654 0.788 13.7 14.4 18.3 0.114 0.180 0.188 0.026 0.016 0.030 0.011 0.006 0.006

Peak Vector Sum 1.119 mm/s at 0.114 sec



UM20687 V 10-90FB Micromate ISEE

a)Industrial Buildings b)Domestic houses/structures

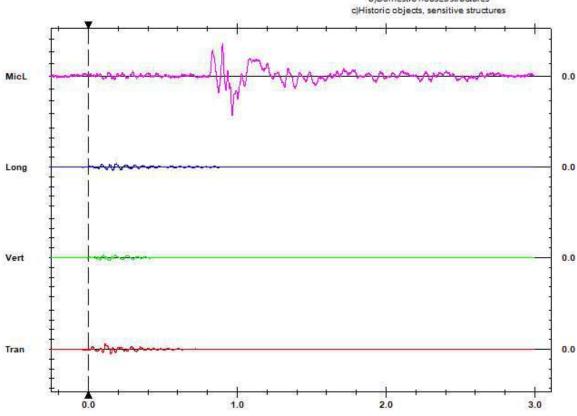

Time Scale: 0.20 sec/div Amplitude Scale: Geo: 2.000 mm/s/div Mic: 1.000 pa.(L)/div

Printed: March 2, 2024 (V 10.72 - 10.72.1)





Date/Time Vert at 14:37:56 January 23, 2024 Serial Number UM20687 V 10-90FB Micromate ISEE

 Trigger Source
 Geo: 0.127 mm/s, Mic: 100.00 dB(L)
 Battery Level
 3.7 Volts

 Range
 Geo: 254.0 mm/s
 Unit Calibration
 October 5, 2023 by UES New Delhi

 Record Time
 3.0 sec at 2048 sps
 File Name
 UM20687_20240123143756.IDFW

Operator/Setup: AKS UNIVERSITY_SATNA/DALMIA CEMENT.N Scaled Distance N/A

Notes
Location: NARANDA LIMESTONE DALMIA CEMENT

Client: User Name: General:

Microphone Linear Weighting
PSPL 109.4 dB(L) at 0.629 sec


DALMIA CEMENT


ZC Freq 5.3 Hz

Channel Test Passed (Freq = 19.7 Hz Amp = 1191 mv)

	Tran	Vert	Long	
PPV	4.847	1.970	3.326	mm/s
ZC Freq	43	31	14.4	Hz
Time (Rel. to Trig)	0.213	0.115	0.173	sec
Peak Acceleration	0.191	0.082	0.168	9
Peak Displacement	0.023	0.013	0.025	mm
Sensor Check	Passed	Passed	Passed	

Peak Vector Sum 5.256 mm/s at 0.212 sec



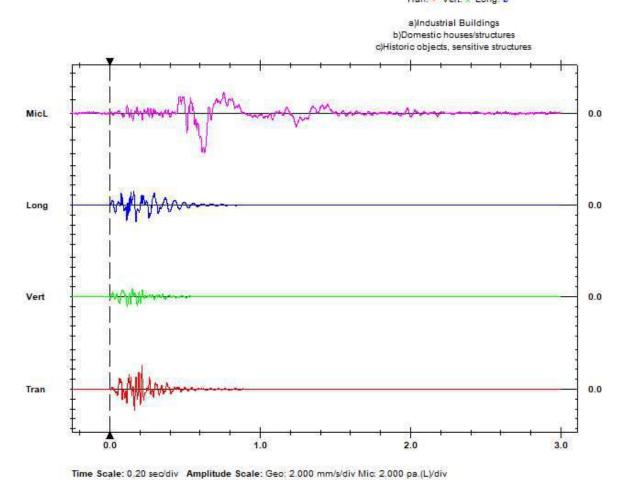

Printed: March 2, 2024 (V 10.72 - 10.72.1)



Unit Calibration




Date/Time Vert at 14:45:18 January 23, 2024 Serial Number Battery Level

Geo: 0.127 mm/s, Mic: 100.00 dB(L) Trigger Source Range Geo: 254.0 mm/s

3.0 sec at 2048 sps File Name Operator/Setup: AKS UNIVERSITY_SATNA/DALMIA CEMENT.N Scaled Distance N/A

UM20687 V 10-90FB Micromate ISEE 3.7 Volts

October 5, 2023 by UES New Delhi UM20687_20240123144518.IDFW



User Name: General:

Record Time


Microphone Linear Weighting PSPL 109.8 dB(L) at 0.682 sec

ZC Freq 5.0 Hz


Channel Test Passed (Freq = 19.7 Hz Amp = 1191 mv)

	Tran	Vert	Long	
PPV	2.065	1.033	1.789	mm/s
ZC Freq	49	28	47	Hz
Time (Rel. to Trig)	0.169	0.137	0.125	sec
Peak Acceleration	0.087	0.043	0.097	9
Peak Displacement	0.012	0.005	0.010	mm
Sensor Check	Passed	Passed	Passed	

Peak Vector Sum 2.357 mm/s at 0.169 sec



a)Industrial Buildings b)Domestic houses/structures

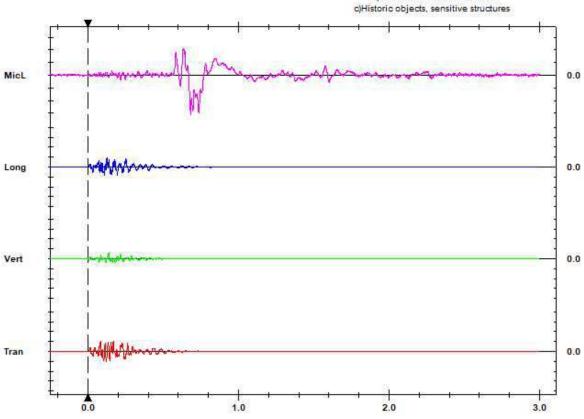

Time Scale: 0.20 sec/div Amplitude Scale: Geo: 2.000 mm/s/div Mic. 2.000 pa.(L)/div

Printed: March 2, 2024 (V 10.72 - 10.72.1)





Vert at 13:51:55 January 24, 2024 Date/Time Serial Number UM20687 V 10-90FB Micromate ISEE Trigger Source Geo: 0.127 mm/s, Mic: 100.00 dB(L) Battery Level 3.7 Volts Geo: 254.0 mm/s Unit Calibration October 5, 2023 by UES New Delhi Range

Record Time 3.0 sec at 2048 sps File Name UM20687_20240124135155,IDFW Operator/Setup: AKS UNIVERSITY_SATNA/DALMIA CEMENT.N Scaled Distance N/A

Notes Location: NARANDA LIMESTONE DALMIA CEMENT Client DALMIA CEMENT

User Name: General:


Microphone Linear Weighting 117.3 dB(L) at 0.747 sec PSPL

ZC Freq 8.5 Hz


Channel Test Passed (Freq = 19.7 Hz Amp = 1229 mv)

	Iran	Vert	Long	
PPV	1.892	1.955	2.057	mm/s
ZC Freq	25	31	17.7	Hz
Time (Rel. to Trig)	0.185	0.172	0.284	sec
Peak Acceleration	0.081	0.067	0.066	9
Peak Displacement	0.010	0.009	0.018	mm
Sensor Check	Passed	Passed	Passed	

Peak Vector Sum 2.349 mm/s at 0.159 sec



a)Industrial Buildings b)Domestic houses/structures c)Historic objects, sensitive structures

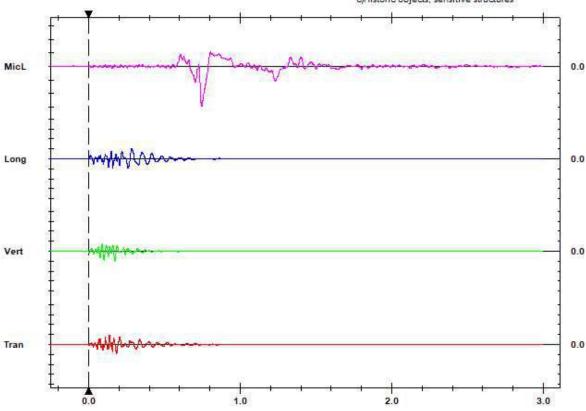

Time Scale: 0.20 sec/div Amplitude Scale: Geo; 2.000 mm/s/div Mic: 5.000 pa.(L)/div

Printed: March 2, 2024 (V 10.72 - 10.72.1)





 Date/Time
 Vert at 13:55:45 January 24, 2024
 Serial Number
 UM20687 V 10-90FB Micromate ISEE

 Trigger Source
 Geo: 0.127 mm/s, Mic: 100.00 dB(L)
 Battery Level
 3.7 Volts

 Range
 Geo: 254.0 mm/s
 Unit Calibration
 October 5, 2023 by UES New Delhi

Record Time 3.0 sec at 2048 sps File Name UM20887_20240124135545.IDFW

Operator/Setup: AKS UNIVERSITY_SATNA/DALMIA CEMENT.N Scaled Distance N/A

Notes
Location: NARANDA LIMESTONE DALMIA CEMENT
Client: DALMIA CEMENT

User Name: General:


Microphone Linear Weighting
PSPL 110.8 dB(L) at 0.868 sec


ZC Freq 7.9 Hz

Channel Test Passed (Freq = 19.7 Hz Amp = 1229 mv)

	Tran	Vert	Long	
PPV	0.662	0.575	1.040	mm/s
ZC Freq	47	27	19.7	Hz
Time (Rel. to Trig)	0.169	0.140	0.167	sec
Peak Acceleration	0.043	0.026	0.044	9
Peak Displacement	0.002	0.003	0.007	mm
Sensor Check	Passed	Passed	Passed	

Peak Vector Sum 1.164 mm/s at 0.168 sec



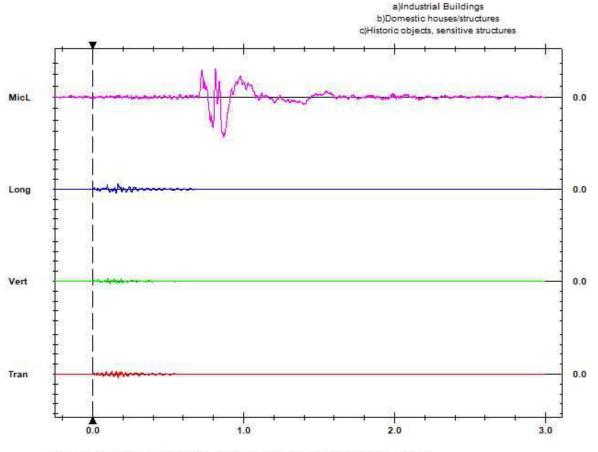

Time Scale: 0,20 sec/div Amplitude Scale: Geo; 2,000 mm/s/div Mic; 2,000 pa.(L)/div

Printed: March 2, 2024 (V 10.72 - 10.72.1)





Date/Time Vert at 14:03:26 January 24, 2024 Serial Number UM20687 V 10-90FB Micromate ISEE Trigger Source Geo: 0.127 mm/s, Mic: 100.00 dB(L) Battery Level 3.7 Volts Range Geo: 254.0 mm/s Unit Calibration October 5, 2023 by UES New Delhi **Record Time** UM20687_20240124140326.IDFW 3.0 sec at 2048 sps File Name

Operator/Setup: AKS UNIVERSITY_SATNA/DALMIA CEMENT.N Scaled Distance N/A

Notes
Location: NARANDA LIMESTONE DALMIA CEMENT
Client: DALMIA CEMENT

User Name: General:


Microphone Linear Weighting PSPL 106.6 dB(L) at 0.582 sec


ZC Freq 24 Hz

Channel Test Passed (Freq = 19.7 Hz Amp = 1229 mv)

	Tran	Vert	Long	
PPV	1.852	0.804	1.766	mm/s
ZC Freq	19.7	24	18.0	Hz
Time (Rel. to Trig)	0.152	0.155	0.189	sec
Peak Acceleration	0.064	0.044	0.064	9
Peak Displacement	0.011	0.005	0.012	mm
Sensor Check	Passed	Passed	Passed	

Peak Vector Sum 1.931 mm/s at 0.127 sec



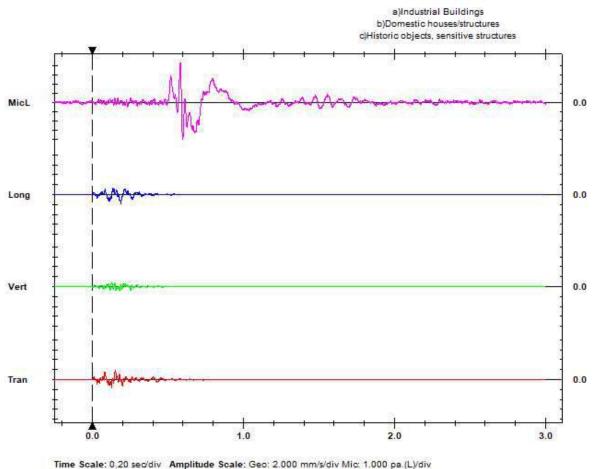

Printed: March 2, 2024 (V 10.72 - 10.72.1)



Serial Number



Date/Time Vert at 14:11:25 January 24, 2024
Trigger Source Geo: 0.127 mm/s, Mic: 100.00 dB(L)

 Trigger Source
 Geo: 0.127 mm/s, Mio: 100.00 dB(L)
 Battery Level
 3.7 Volts

 Range
 Geo: 254.0 mm/s
 Unit Calibration
 October 5, 2023 by UES New Delhi

 Record Time
 3.0 sec at 2048 sps
 File Name
 UM20687_20240124141125.IDFW

Operator/Setup: AKS UNIVERSITY_SATNA/DALMIA CEMENT.N Scaled Distance N/A

Notes
Location: NARANDA LIMESTONE DALMIA CEMENT
Client: DALMIA CEMENT


User Name: General:

Microphone Linear Weighting PSPL 115.7 dB(L) at 0.778 sec


ZC Freq 8.7 Hz

Channel Test Passed (Freq = 19.7 Hz Amp = 1229 mv)

	Tran	Vert	Long	
PPV	0.969	0.772	0.930	mm/s
ZC Freq	20	37	19.0	Hz
Time (Rel. to Trig)	0.196	0.082	0.155	sec
Peak Acceleration	0.058	0.033	0.041	9
Peak Displacement	0.006	0.004	0.007	mm
Sensor Check	Passed	Passed	Passed	
Peak Vector Sum 1	.217 mm	/s at 0.19	7 sec	



UM20687 V 10-90FB Migromate ISEE

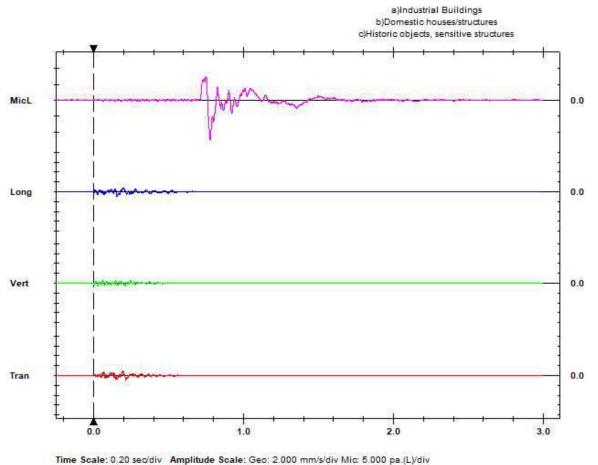

Printed: March 2, 2024 (V 10.72 - 10.72.1)





Date/Time Vert at 14:18:38 January 24, 2024 Serial Number

 Trigger Source
 Geo: 0.127 mm/s, Mic: 100.00 dB(L)
 Battery Level
 3.7 Volts

 Range
 Geo: 254.0 mm/s
 Unit Calibration
 October 5, 2023 by UES New Delhi

 Record Time
 3.0 sec at 2048 sps
 File Name
 UM20687_20240124141636.IDFW

Operator/Setup: AKS UNIVERSITY_SATNA/DALMIA CEMENT.N Scaled Distance N/A

Notes
Location: NARANDA LIMESTONE DALMIA CEMENT
Client: DALMIA CEMENT

User Name: General:


Microphone Linear Weighting
PSPL 115.6 dB(L) at 0.603 sec

ZC Freq 5.1 Hz


Channel Test Passed (Freq = 19.7 Hz Amp = 1229 mv)

	Tran	Vert	Long	
PPV	1,466	1,143	1.860	mm/s
ZC Freq	28	23	25	Hz
Time (Rel. to Trig)	0.115	0.186	0.184	sec
Peak Acceleration	0.041	0.044	0.049	9
Peak Displacement	0.008	0.009	0.011	mm
Sensor Check	Passed	Passed	Passed	

Peak Vector Sum 2.175 mm/s at 0.184 sec



UM20687 V 10-90FB Migromate ISEE

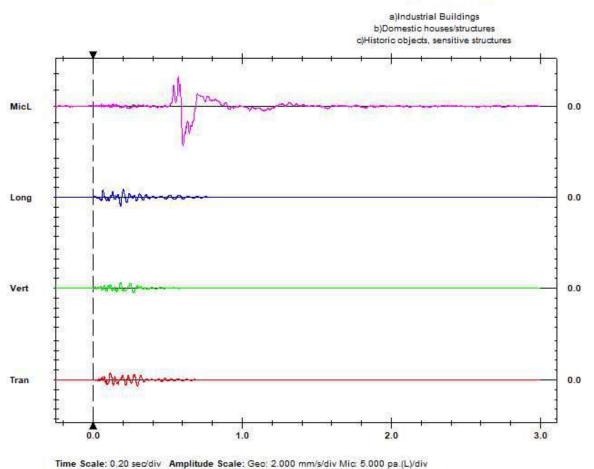

Printed: March 2, 2024 (V 10.72 - 10.72.1)



Serial Number



Date/Time Vert at 14:22:14 January 24, 2024

 Trigger Source
 Geo: 0.127 mm/s, Mio: 100.00 dB(L)
 Battery Level
 3.7 Volts

 Range
 Geo: 254.0 mm/s
 Unit Calibration
 October 5, 2023 by UES New Delhi

 Record Time
 3.0 sec at 2048 sps
 File Name
 UM20887_20240124142214.IDFW

Operator/Setup: AKS UNIVERSITY_SATNA/DALMIA CEMENT. N Scaled Distance N/A

Notes
Location: NARANDA LIMESTONE DALMIA CEMENT
Client: DALMIA CEMENT

User Name: General:


Microphone Linear Weighting PSPL 114.3 dB(L) at 0.529 sec

ZC Freq 4.3 Hz


Channel Test Passed (Freq = 19.7 Hz Amp = 1229 mv)

	Tran	Vert	Long	
PPV	2.554	2.317	2.680	mm/s
ZC Freq	18.3	28	21	Hz
Time (Rel. to Trig)	0.160	0.172	0.217	sec
Peak Acceleration	0.072	0.100	0.067	9
Peak Displacement	0.021	0.014	0.017	mm.
Sensor Check	Passed	Passed	Passed	

Peak Vector Sum 3.174 mm/s at 0.160 sec




UM20687 V 10-90FB Micromate ISEE

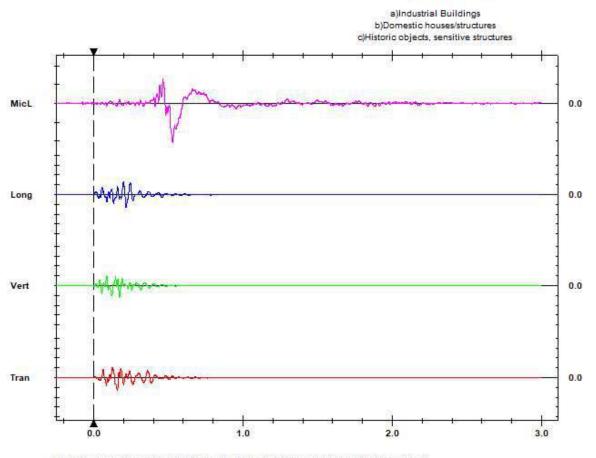


Time Scale: 0.20 sec/div Amplitude Scale: Geo; 2.000 mm/s/div Mic: 5.000 ps.(L)/div

Printed: March 2, 2024 (V 10.72 - 10.72.1)

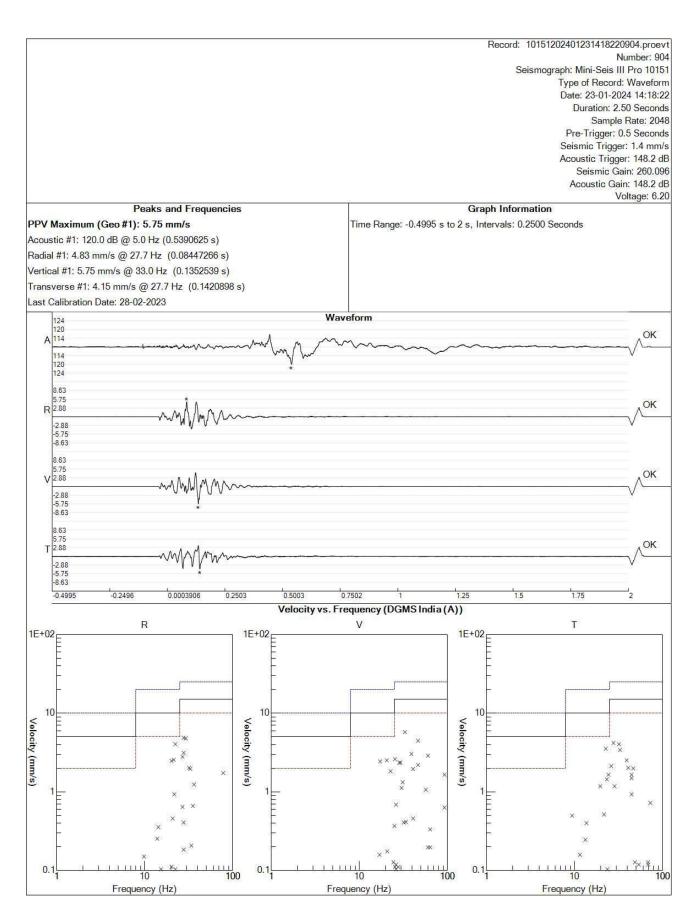

White Seismograph Data Analysis V13

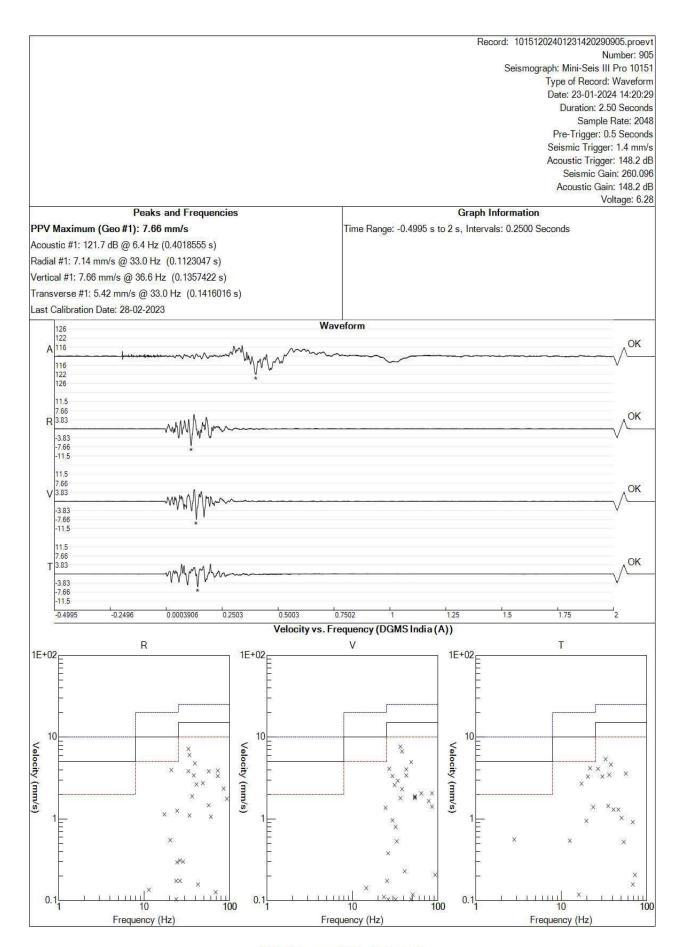


White Seismograph Data Analysis V13

Record: 10151202401231424180906.proevt Number: 906 Seismograph: Mini-Seis III Pro 10151 Type of Record: Waveform Date: 23-01-2024 14:24:18 Duration: 2.50 Seconds Sample Rate: 2048 Pre-Trigger: 0.5 Seconds Seismic Trigger: 1.4 mm/s Acoustic Trigger: 148.2 dB Seismic Gain: 260.096 Acoustic Gain: 148.2 dB Voltage: 6.18 Peaks and Frequencies **Graph Information** PPV Maximum (Geo #1): 5.52 mm/s Time Range: -0.4995 s to 2 s, Intervals: 0.2500 Seconds Acoustic #1: 129.9 dB @ 7.6 Hz (0.4438477 s) Radial #1: 5.52 mm/s @ 18.0 Hz (0.02050781 s) Vertical #1: 5.22 mm/s @ 26.3 Hz (0.08154297 s) Transverse #1: 3.8 mm/s @ 41.0 Hz (0.128418 s) Last Calibration Date: 28-02-2023 Waveform OK A 124 124 130 134 8.28 OK R 2.76 -2.76 -8 28 8.28 5.52 OK V 2.76 -2.76 -5.52 -8.28 8,28 5.52 T 2.76 OK -2.76 -5.52 -8.28 -0.4995 -0.2496 0.0003906 0.2503 0.5003 0.7502 1.75 Velocity vs. Frequency (DGMS India (A)) R T 1E+02 1E+02 1E+02 Velocity (mm/s) Velocity (mm/s) Velocity (mm/s) 0.1 100 100 Frequency (Hz) Frequency (Hz) Frequency (Hz)


White Seismograph Data Analysis V13

Record: 10151202401231440500918.proevt Number: 918 Seismograph: Mini-Seis III Pro 10151 Type of Record: Waveform Date: 23-01-2024 14:40:50 Duration: 2.50 Seconds Sample Rate: 2048 Pre-Trigger: 0.5 Seconds Seismic Trigger: 1.4 mm/s Acoustic Trigger: 148.2 dB Seismic Gain: 260.096 Acoustic Gain: 148.2 dB Voltage: 6.19 Peaks and Frequencies **Graph Information** PPV Maximum (Geo #1): 3.1 mm/s Time Range: -0.4995 s to 2 s, Intervals: 0.2500 Seconds Acoustic #1: 123.1 dB @ 5.2 Hz (0.4921875 s) Radial #1: 3.1 mm/s @ 36.6 Hz (0.02490234 s) Vertical #1: 2.73 mm/s @ 29.3 Hz (0.1201172 s) Transverse #1: 2.63 mm/s @ 36.6 Hz (0.01074219 s) Last Calibration Date: 28-02-2023 Waveform OK A 118 118 126 4.65 OK R 1.55 -1.55 -4.65 4.65 3.1 V 1.55 OK -1.55 -4.65 4.65 3.1 T 1.55 OK -1.55 -4.65 -0.4995 -0.2496 0.0003906 0.2503 0.5003 0.7502 1.75 Velocity vs. Frequency (DGMS India (A)) R T 1E+02 1E+02 1E+02 Velocity (mm/s) Velocity (mm/s) Velocity (mm/s) 100 100 10 Frequency (Hz) Frequency (Hz) Frequency (Hz)


White Seismograph Data Analysis V13

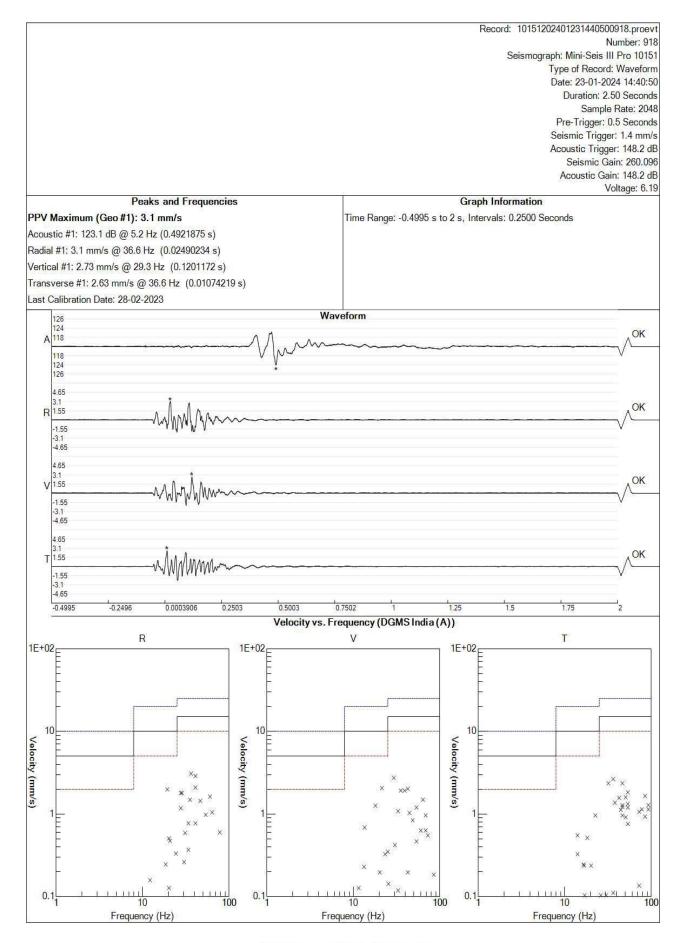


White Seismograph Data Analysis V13

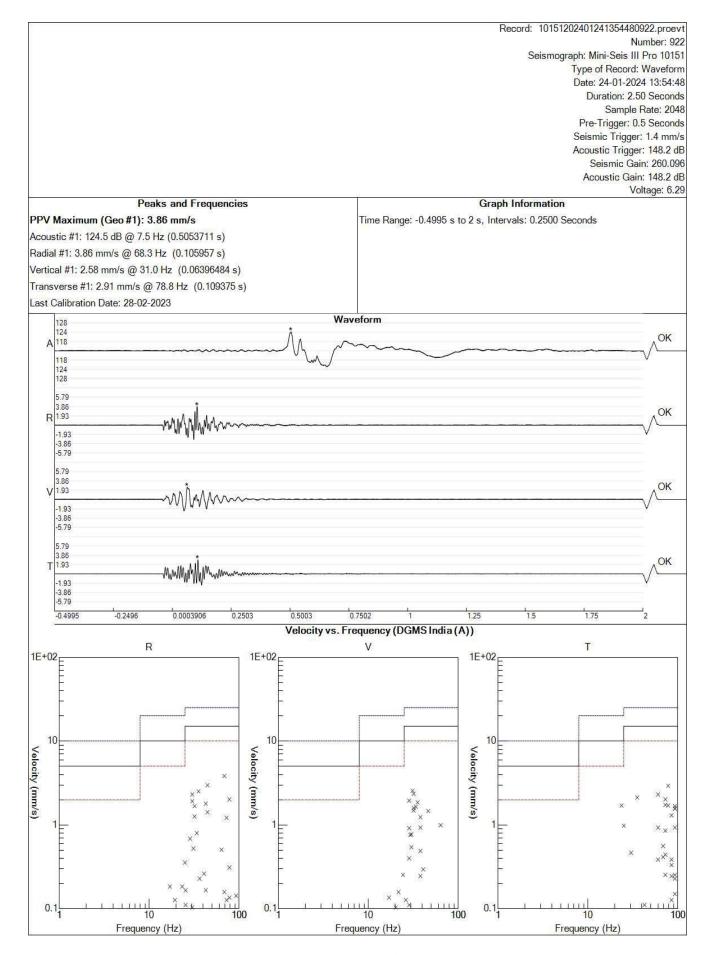


White Seismograph Data Analysis V13

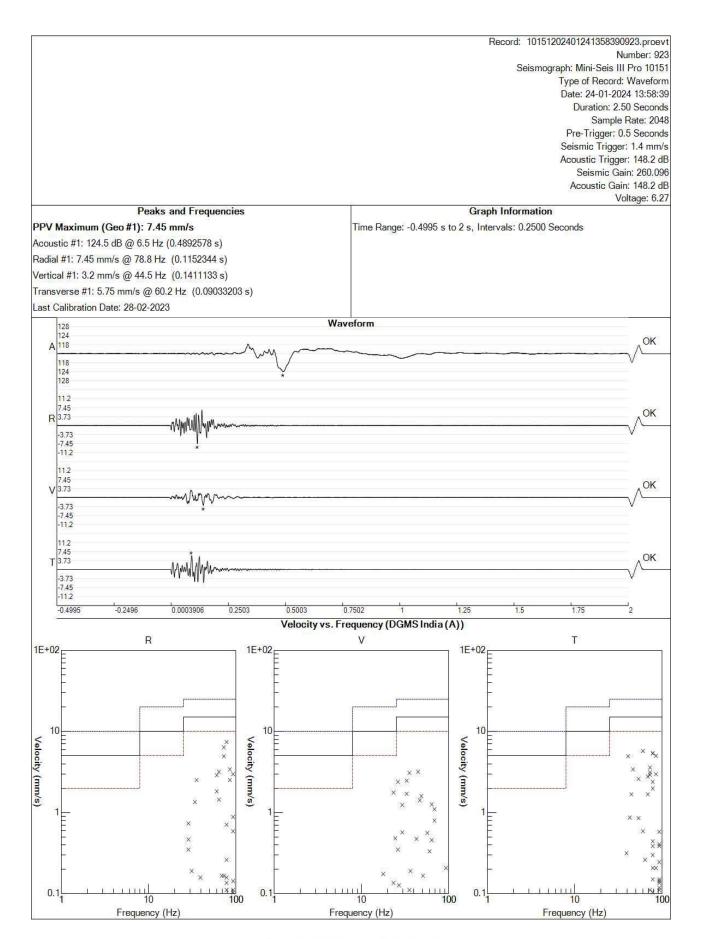

White Seismograph Data Analysis V13

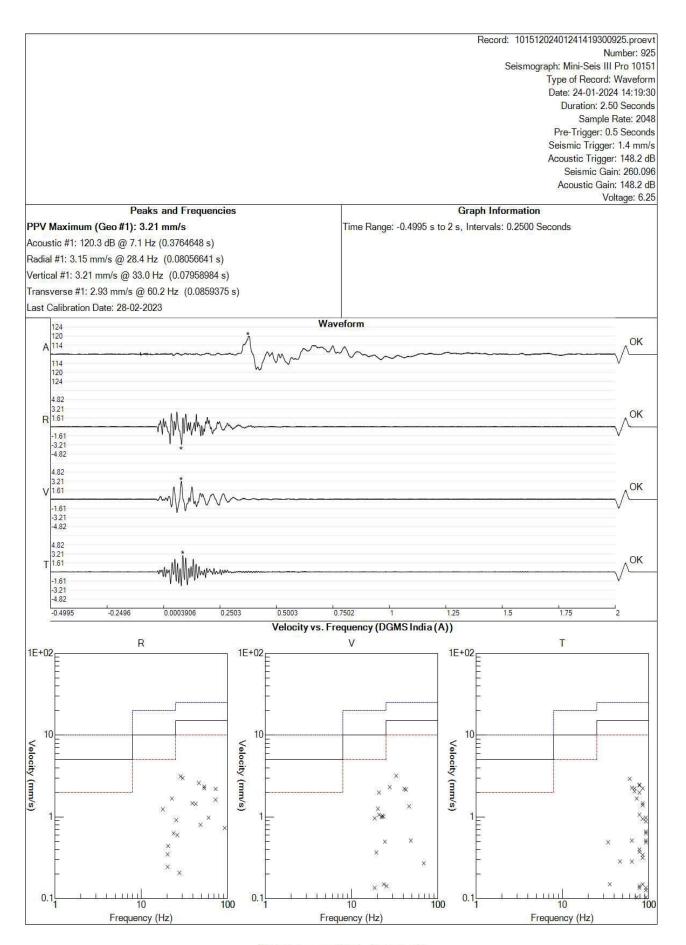

White Seismograph Data Analysis V13

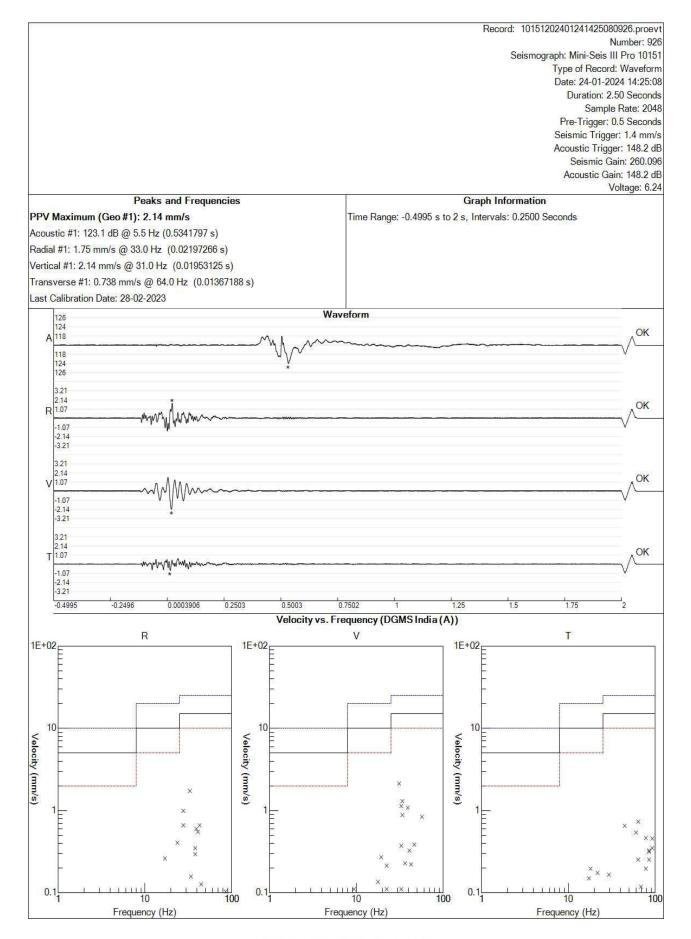

White Seismograph Data Analysis V13

References-

- 1. CSIR-CIMFR Report on, "Study into Blast Design Parameters at Tirap Colliery, NEC to Control Ground Vibration, Air Overpressure and Flyrock Within Safe Limits GC/MT/102/2005-06"
- 2. CSIR-CIMFR Report on, "Scientific Study for Optimization of Blasting Parameters for the Captive Limestone Mine of M/s Adhunik Cement Limited, Jaintia Hills, Meghalaya CNP-2478/2009-10".
- 3. CSIR-CIMFR Report on, "Investigations into Blast-induced Ground Vibrations at Manal Limestone Mine, Rajban Cement Works, CCIL, H.P GC/MT/124/2005-06".
- 4. CSIR-CIMFR Report on, "Scientific study and advice for design and development of controlled blasting nearby villages at Kashlog/Mangu Limestone mine of Ambuja Cements Limited, Darlaghat, HP, 2022".
- 5. CSIR-CIMFR Report on, "Scientific study and advice for designing of controlled blasting patterns for carrying out safe blasting operations at South Khliehjari Limestone Mine of M/s Meghalaya Cements Limited, East Jaintia Hills, Meghalaya, 2022.
- 6. Blasters' Handbook, 18th Edition, 2011. International Society of Explosive Engineers, USA, (Eds. Jeffrey L. Dean et al.), p. 1030. 7. DGMS (Tech) S&T Circular No. 7 of 1997. Damage to the structures due to blast induced ground vibration in the mining areas, Directorate General of Mines Safety, Dhanbad, India, pp. 9-12.
- 8. Dowding, C. H., 1985. 'Blast vibration monitoring and control'. PrenticeHall, Englewood Cliffs, NJ, p. 287.
- 9. Duval, W. I. and Petkof, B., 1959. 'Spherical propagation of explosion generated strain pulses in rock'. US Bureau of Mines, R.I. 5483, p. 20.
- 10. Duval, W. I. and Fogelson, D. E., 1962. 'Review of criteria for estimating damage to residences from blasting vibration'. US Bureau of Mines, R.I. 5968, p. 19. CSIR-Central Institute of Mining & Fuel Research (CSIR-CIMFR), Dhanbad-826015 56 *CSIR- INDIA*
- 11. Jimeno, C. L., Jimeno, E. L. and Carcedo, F. J. A., 1995. 'Drilling and Blasting of Rock'. Geomining Technological Institute of Spain, ISBN 90 5410 1997, A. A. Balkema/Rotterdam, p. 391.
- 12. Konya, C. J. and Walter, E. J., 1990. 'Surface blast design'. Prentice Hall Int. Inc., USA, p. 303.
- 13. Oriard, L. L., 2002. 'Explosive engineering, construction vibrations and geotechnology'. International Society of Explosive Engineering (ISEE), Cleveland, OH, USA, p. 680.
- 14. McKenzie, C.K. (2009): "Flyrock Range & Fragmentation Size Prediction", in Proceedings of the 35th Conference on Explosives and Blasting Technique, Vol. 2, ISEE.
- 15. Pal Roy, Pijush, 2005. 'Rock blasting effects and operations', Oxford and IBH Publishing Company Pvt. Ltd., New Delhi (Also published by A. A. Balkema, Rotterdam, The Netherlands), p. 345

ANNEXURE-IV PHOTOGRAPH OF CAAQMS STATION AT NARANDA LIMESTONE MINE



CAAQMS Installed at Crusher Area (Mines)

ANNEXURE-V CSR EXPENDITURES

SN	CSR Activities	CSR expenditures (in Rs Lakhs)			
		2020-21	2021-22	2022-23	2023-24
1	Education	0.00	0.85	2.58	2.40
2	Health	0.29	9.61	0.53	0.00
3	Agriculture & Animal husbandry	0.00	2.50	9.30	18.35
4	Women empowerment & Vocational Trainings	0.01	0.04	1.57	0.00
5	Infrastructure Development	0.00	9.76	16.66	6.27
6	Event & day celebration	0.01	0.10	0.30	0.20
7	Plantation & Rain Water Harvesting	0.00	0.00	8.50	9.10
		0.30	22.86	39.44	36.32
	Grand Total		98.	92	

Activities undertaken as per Public Commitments

Programs	Activities
Environmental Monitoring and Management	One Continuous ambient air quality monitoring station installed near limestone crusher and 2 stations installed in adjacent Cement plant. The real time data is uploading to CPCB as well as MPCB. Ambient air quality data is displayed in public domain outside the plant gate.
	Total amount of Rs. 135 lakhs have been incurred for Environmental monitoring and management in FY 2023-24.
	Environment protection measures are being implementing to control the dust emissions during mining activities, crushing limestone and vehicle movement inside the ML area. Bag filters provided at Limestone crusher, Limestone transportation being done through covered conveyor belt. Regular water sprinkling on internal roads and haul roads of mine. Agriculture crops and agriculture land in nearby villages including surrounding environment are not being damaged due to the mining activities. Water quality has been monitored for all the parameters as per
	IS-10500. There is no adverse impact on water quality due to mining activities
Socio-Economic development activities	Pursuant to approval of NCLT for implementation of the Resolution Plan, Murli Industries Limited (MIL) has become a subsidiary of Dalmia Cement (Bharat) Limited (DCBL) from September 10, 2020. After that we have initiated Socio-Economic development activities in nearby villages as per need base assessment.
	Under CSR activities, Infrastructure development, educational, Health and Vocational training, Agriculture & Animal Husbandry, Rainwater Harvesting, Environmental Awareness activities etc. are being organized for the nearby villagers.
	At about Rs. 98.94 Lakh has been spent towards various Socioeconomic developmental activities in phased manner from FY' 2020-21 till FY 2023-24.

HEALTH

- **1.** Total 6250 Mask distributed directly to frontline health workers, in 13 Gram Panchayat, 2 Nagar Panchayat, 2 Police station, 2 Rural Hospital
- 2. Covid Vaccination Drive: DBF supports in mobilization and registration of villagers to PHC Naranda & PHC Kawthala for Covid Vaccination Drive: Till date we have covered 6806 people to get vaccinated Covered 10 villages: 1. Naranda, 2. Vanoja, 3. Sangoda, 4. Kadholi, 5. Asan B. K, 6. Antargaon, 7. Zutting, 8. Pimpalgaon, 9. Gadchandur, 10. Loni
- **3.** Support in Covid Vaccination drive to District administration: 100000 Auto Disable (A.D) Syringe (0.5 ml) hand over to District Health Officer
- **4.** Felicitation of frontline Health worker of PHC Naranda and PHC Kawthala by Unit Head-MIL-DCBL, HR-Head.
- **5.** Vehicle Support for one month to SDO office, Primary Health Center Naranda to mobilize staff, vaccine distribution and for door to door vaccination in our project villages. Covered 2 PHC and 1 PHC subcenter

6. Free health Check-up Camp

Organized Two free health Checkup camp (B.P, Sugar, oral cancer, gynec related diseases etc.) at Sangoda and Antargaon village in association with PHC Kawthala and Tata Trust Chandrapur.

Total beneficiary:

- 1. Sangoda: 107
- 2. Antargaon: 114

Blood Donation Camp at Vanoja Village, Naranda Village and kadholi kh

- 7. Organized the TB Orientation program to women SHG members at Naranda in association with The Union Organization, Taluka Health Department and PHC Naranda. Total 78 members present in the program. No. of villages covered: 2
- **8.** Health Check-up Camp: Organized health checkup for pregnant women, counselling and treatment camp of B.P, Sugar, cancer at PHC Sub-Center Antargaon. Total beneficiaries 70.
- **9.** PHC Naranda & Dalmia Bharat Foundation Naranda organized free health check-up camp at PHC Naranda under govt. health campaign of "Safe Mother-Safe home". Taluka health officer Korpana Total beneficiary of the health camp 175. Protein powder distribution to 68 pregnant women done in this program
- **10.** PHC Sub center Antargaon & Dalmia Bharat Foundation Naranda organized "Arogya Melava" at Sangoda for counselling, personal hygiene, disease, symptoms, treatment, nutrition and awareness about schemes for pregnant women.
- **11.** Dalmia Bharat Foundation as Ni-kshay Mitra distributed the Nutrition Kit to two identified T.B patients under the "Pradhan Mantri T.B Mukt Bharat Abhiyan" at PHC Naranda. DBF will support the patient upto six month.

































SOCIAL INFRASTRUCTURE

- 1. Installation of 20 solar street lights in 5 villages:
 - 1.Sangoda
 - 2.Vanoja
 - 3.Antargaon
 - 4.Kadholi kh
 - 5.Pipari
- 2. Two High mast Light at Naranda
- 3. Village Pond Development


Size of the Pond: Length-400 ft. Breadth-170 ft. Depth- 5ft. Excavated 5 ft. more. Now Total depth 10ft

- 4. Sitting cement benches for community at Vanoja village
- **5. Safe Drinking Water Facility:** Installation of RO Unit & Construction of RO Shade at Vanoja village and 60 LPH RO installed at PHC Naranda

No. of beneficiaries impacted: 180 House Holds

No. of villages covered: 2

- 6. E-Learning kit setup & Installation done at 4 School and 2 Anganwadi
- 7. 2 LPG Gas cylinder and Shegdi provided to Anganwadi at Sangoda village: Support to mid-day meal cooking at Anganwadi.
- 8. Beautification of village Entry Gate Sangoda
- 9. Beautification of Sites: 1. Paver block fixing at Z.P School vanoja 2. Community hall Naranda 3. Z.P school Pipari
- 10. Construction of 20 Nos Rain water recharge structures in nearby villages

































































AGRICULTURE & ANIMAL HUSBANDRY

- **1.** Dalmia Bharat Foundation and Taluka Agriculture department Korpana jointly organized Soyabean seed treatment demonstration program prior seed sowing (kharip season) at Antargaon & Vanoja project villages.
 - No. of beneficiaries impacted: 75, No. of villages covered: 2 (Antargaon & vanoja)
- **2.** Demonstration on Dashparni ark making for organic pest control method to SHG women farmer at Naranda. useful for spraying on cotton, soyabean, vegetables. It will help farmers to reduce the input cost. SHG farmers also planned to marketing of the products at minimum cost. Total 10 SHG women farmer participated in the program.
- **3.** Veterinary animal health checkup camp: 1. Naranda, 2. Vanoja, 3. Sangoda, 4.Antargaon, 5. Kadholi kh
- **4.** Dalmia Bharat Foundation and Veterinary department jointly conducted veterinary camp at Antargaon, Sangoda, Vanoja, Kadholi kh, Pipari, Naranda village in Korpana block. Total cattles 450 in which 320 cattles (Cow, Bullock, buffalo) & 130 Goats treated through this camp.

Knapsack Power Spray Distribution to farmers:

No. of villages covered: 4, No. of beneficiary farmer: 200, Beneficiary contribution: 40%

















EDUCATION

- 1. Today DBF & NIIT foundation started CCFL (Certificate Course in Financial Literacy) batch at Adarsh Kisan Vidyalaya & Jr. college Naranda. 24 students enrolled for the course.
- 2. E-Learning kit setup & installation in 15 Anganwadi under Digital Anganwadi Initiative No. of Villages covered:13, No. of students covered: 260
- **3.** Library Development Support: Village: 1. Sangoda 2. Kadholi kh 3.Antargaon
- **4.** Organized Self Defence Training Program at Adarsh Kisan Vidyalay & Jr. college Naranda. Total 150 students participated in the program
- 5. Celebration of Azadi Ka Amrit Mahotsav (theme-Mehandi)
- 6. Safety Week Celebration at School Naranda/sangoda









































ENVIRONMENTAL AWARENESS

Plantation: Sites:1. Vanoja Road, 2. Kadholi kh Road, 3. Naranda Bus stand to PHC road 4. PHC Naranda









SKILLS & LIVELIHOOD

1. "Entrepreneurship Development training program" in nearby villages for women SHG members & for girls. like Bakery products making training, Fast food, Pickle & Papad, poultry etc.

Total 120 women members participated in the program.

Total villages covered:5

2. Micro-entrprises: Vermicelli making group activity

No. of Beneficiary: 10

Name of SHG- Vedanti SHG, Name of Village: Naranda

3. Micro-enterprises: Nursery Development at Naranda

4. Micro-enterprises: Paper Plate (disposable) making group activity: Antargaon

DBF supported to purchase raw material

No. of Beneficiary: 10

Name of Village: Antargaon

- 5. Strive-Skill Strengthening for Industrial Value Enhancement
- **6.** Azolla bed distribution to farmers
- **7.** Vermicompost bed distribution to farmers
- **8.** Linseed crop cultivation
- 9. Nutrition kit support to TB patient10. 5 KW solar unit installation at chunala orphanage
- **11.** Oranic pest control-Dashparni ark sale by Shg







































SN	Name Of Village	Activities	Brief about activities	Amount (INR)	F.Y
1	Naranda	Convergence meeting	1.DBF organised govt . Scheme awareness meeting at Naranda Village as a convergence part in our project area. Invited a resource person from panchayat Samiti ,Korpana. 2.The Skill and Entrepreneurship development training awareness program at Naranda in association with Bank of India training institue R-SETI.The thrust of the program is entrepreneurship development amongst youth. Free of cost courses are available along with residential facilities to the trainees. 18 youth participated in this program. The program was held at Naranda village.	500	2020-21
2	Naranda	Launch of World on wheels (WoW): A digital Literacy program	Started from Adarsh Kisan Vidyalaya & Jr. college,Naranda. No.Of students ready: 240 No. Of batches: 07 Target Beneficiary: 1.School/College students 2.Teacher staff 3.Asha worker 4.PHC staff 5.Security Guard 6. SHG members etc.	0	2020-21
3	Naranda	Covid Vaccination Drive	Support to PHC Naranda and PHC Kawathala for covid vaccination drive for registration and mobilization.5000+ villagers registered and got vaccinated in our project villages with the help of DBF support	500	2020-21
4	Naranda PHC	Support to Polio Vaccination campaign	DBF supports in awareness campaign to Primary Health Centre Naranda by displaying banners and vehicle (four wheeler) provided for vaccine distribution at the villages.	700	2020-21
5	Naranda	Event & day Celebration	Celebration of Savitribai Fule's 190th Jayanti with students and teacher's staff of Adarsh Kisan Vidyalaya & Jr. college, Naranda: Awareness regarding DBF's introduction, digital literacy program, skill development, Self employment etc.	650	2020-21
6	Naranda	Event & day Celebration	Teachers day celebration at Adarsh Kisan Vidyalaya Naranda.felicitation of Teachers ,students and staff by giving tropy, certificates. Also donated 2 fan and 2 Led tubelights to school on the occasion.	3000	2021-22
7	Naranda	Support in Covid-19 vaccination awareness campaign to PHC Naranda	Displayed the Covid-19 vaccination awareness banners in village.	900	2021-22
8	Naranda	Women Empowerment Program	NRLM organised women empowerment program and haldi kumkum program at Naranda and invited DBF team as main guest to introduce Dalmia Bharat Foundation's different activities/initiatives also aware them regarding digital literacy program through WoW in Naranda and nearby villages.Total 150 women present in the program.	1000	2021-22

9	Naranda	"Breath Safe" Initiative: Total No. of Mask Distributed: 1250/ 3 layer cotton mask:5000 (Total Mask distribution:6250) No. of frontline health workers covered: 934 No. Of Grampanchayat Covered: 13 No. Of Nagarpanchayat Covered:2 Beneficiary: 1.School/College students 2.Teacher staff 3.Asha worker 4.PHC staff 5.Security Guard 6. SHG members etc.)	Distributed 750 N-95 mask and 3 layer cotton mask to safegaurd against covid-19	22500	2021-22
10	Naranda	Safe Drinking Water facility	Provided RO of 60 LPH capacity to Primary Health Center Naranda for patients coming from 32 villages.	72000	2021-22
11	Naranda	Village Pond Excavation	Village pond excavation done at Naranda village with the help of mines dept. Size of the Pond: Length-400 ft. Breadth-170 ft. Depth-5ft. Excavated 5 ft. more. Now Total depth 10ft Advantages: 1.Useful specially in summer for animal drinking purpose. 2.Will recharge all water resources ,which is useful for Village and for our plant also. 3.Will increase water table 4.Farmers nearest to site will get benefitted for critical irrigation to crops in dry span.	250000	2021-22
12	Naranda	School Support Program (Digital Learning kit)	E-learning kit installation done at Z.P School,Naranda	48000	2021-22
13	Naranda	Solar High Mast Light	Installed 2 Solar High Mast Light	239877	2021-22
14	Naranda	Anganwadi Refurbishment (Digital Learning set)	E-learning kit installation done at Anganwadi Naranda	36823	2021-22
15	Naranda	One month Vehicle Support for Covid Vaccination Drive through SDO Rajura to PHC Naranda	Vehicle used for covid vaccination in all villages. Purpose to PHC staff mobility and vaccine distribution.	70000	2021-22
16	Naranda	Community mobilization & convergence	1.Awareness meetings regarding different veternary ongonig schemes. Application received from interested villagers and applied through online process. 2.Scheme of free MS-CIT course (Rs.4500) from ICDS dept. for girl student only.Application collected and submitted in ICDS dept.	400	2021-22
17	Naranda	National Safety Week	Celebrated at Adarsh Kisan Vidyalaya Naranda. Organized drawing competetion and prize distribution. In association with Safety Dept. MIL-DCBL	1800	2021-22
18	Naranda	Safety week celebration	Celebrated safety week celebration at Adarsh Kisan vidyalay & Jr. college Naranda. Organised Saftey drawing competition. Prize distribition accordingly.	1500	2021-22

19	Naranda	Health check-up camp	PHC Naranda & Dalmia Bharat Foundation Naranda organized free health check-up camp at PHC Naranda under govt. health campaign of "Safe mother-Safe home". Taluka health officer Korpana Dr. Swapnil Tembhe and supporting staff of PHC, Sarpanch Naranda Mrs. Anutai Tajne, Asha worker present in the program. Objective of this program is to councelling, personal hygiene, disease, symptoms, treatment, nutrition and awareness about schemes for pregnant women. Total beneficiary of the health camp 175. Protein powder distribution to 68 pregnant women done in this program	5000	2022-23
20	Naranda	Support to Govt.Health Initiative: TB eradication program	Dalmia Bharat Foundation as Ni-kshay Mitra distributed the Nutrition Kit to two identified T.B patients under the "Pradhanmantri T.B Mukt Bharat Abhiyan " at PHC Naranda. DBF will support the patient upto six month.THO appreciates the DBF's initiatives. No. of Beneficiary:6	28800	2022-23
21	Naranda	TB Orientation & awareness program:	Organized the TB Orientation program to women SHG members at Naranda in association with The Union Organisation, Taluka Health Department and PHC Naranda. Total 78 members present in the program. No. of villages covered: 2	1000	2022-23
22	Naranda	Health & Sanitation: Project BaaLa	Awareness through 10 identified BaaLa associate regarding menustrual hygine and selling of reusable sanitory napkeen pads in their own village & nearby villages as an livelihood activity.	1800	2022-23
23	Naranda	Village Pond development	Dalmia Bharat Foundation and Mines dept of MIL-DCBL started village pond excavation at village Naranda in presence of Sarpanch grampachayat Naranda and GP members along with Mines team and DBF team, Useful specially in summer for animal drinking purpose, Recharge all water resources, Will increase water table, Farmers nearest to site will get benefitted for critical, irrigation to crops in dry span.	450000	2022-23
24	Naranda	Veternery health checkup camp	Dalmia Bharat Foundation and Veterinary department jointly conducted veterinary camp at Antargaon, Sangoda, Vanoja, Kadholi kh, Naranda village in Korpana block. Extension officer (Vet.)-panchayat samiti Korpana Dr. Rathore, Dr. Kinkhede and supporting staff were present in the camp. Total cattles 450 in which 320 cattles (Cow, Bullock, buffalo) & 130 Goats treated through this camp	12000	2022-23
25	Naranda	Financial Literacy Program	DBF & NIIT foundation started CCFL(Certificate Course in Financial Literacy) batch at Adarsh Kisan Vidyalaya & Jr. college Naranda. 24 students enrolled for the course. It is an online course running in HP-WoW digital bus .Certificate will get from NIIT after successfully course completion.Total 24 students attended the exam. 100 % students passed the exam	0	2022-23
26	Naranda	Anganwadi E-Learning Kit Setup & Installation	E-Learning kit setup & installation in 2 Anganwadi under Digital Anganwadi Initiative No.of students covered: 60	73647	2022-23
27	Naranda	Beautification of Sites	Paver block fixing at Community hall Naranda	189866	2022-23
28	Naranda	Water harvesting structure	constructed three borewell recharge pit .created water harvesting capacity 1.50 lakh KL	479928	2022-23

29	Naranda	Self Defence Training Program	DBF & Environment department (DCBL) jointly conducted "Self Defense Training Program" at Adarsh Kisan Vidyalay & Jr. college Naranda. Demonstrated the self defense technique specially for girl students to analyze a dangerous situation and take actions to overcome them effectively. Training been given by renowned resource person Mr. Abhilash Ashtankar a state level Judo expert and his student Sujal Pawar. Program were attended by Sunil Kumar Bhusari sir as chief, School committee members, principal, teacher staff, & senior citizen of the village. Total 150 students participated in the program. Students and teachers feels very happy for first time such initiative.	1200	2022-23
30	Naranda	Event & day Celebration	Celebration of Azadi Ka Amrit Mahotsav (theme-Mehandi) Safety Week Celebration at School Naranda/sangoda	1000	2022-23
31	Naranda	Livelihood Trainings to SHG women members & Girls	"Entrepreneurship Development training program" in nearby villages for women SHG members & for girls like Bakery products making training, Fast food, Pickle & Papad, poultry etc. Inauguration done by Sh. Abhishek Kumar Mishra (HR-Head) & Awdhut Musale (HR-IR). Total 120 women members participated in the program.	26000	2022-23
32	Naranda	Micro-entrprises:	Vermicelli making group activity No. of Beneficiary: 10 Beneficiary: women self help Village: Naranda	38000	2022-23
33	Naranda	Micro-entrprises:	Nursery Development Support to Nursery development. SHG started nursery microenterprise at Naranda	37000	2022-23
34	Naranda	Sustainable Agriculture	Demonstration on Dashparni ark making: Demonstration on Dashparni ark making for organic pest control method to SHG women farmer at Naranda. useful for spraying on cotton, soyabean, vegetables. It will help farmers to reduce the input cost. SHG farmers also planned to marketing of the products at minimum cost. Total 10 SHG women farmer participated in the program.	0	2022-23
35	Naranda	Sustainable Agriculture	Knapsack Power Spray Distribution to farmers: No. of beneficiary farmer:110 Beneficiary contribution: 40% Objective: 1.To save time, pump rent, and labour cost. Etc 2.On time pest control at the time of critical stage of crops 3.To save the crop from heavy infestation of pest & diseases attack 4.Ultimately to increase the productivity of the crop	211200	2022-23
36	Naranda	Clean energy initiative	Installed one solar street light at PHC Naranda	16032	2022-23
37	Vanoja	Support to Polio Vaccination campaign	DBF supports in awareness campaign to Primary Health Centre by displaying banners and vehicle (four wheeler) provided for vaccine distribution at the villages.	700	2021-22
38	Vanoja	Support in Covid-19 vaccination awareness campaign to PHC Naranda	Displayed the Covid-19 vaccination awareness banners in village.	900	2021-22
39	Vanoja	"Breath Safe" Initiative : N95 & 3 layer cotton mask:5000 (Total Mask distribution:6250)	Distributed 500 N-95 mask and 3 layer cotton mask to safegaurd against covid-19	10000	2021-22
40	Vanoja	Plantation Program	135 plants distributed to vanoja Grampanchatyat and plantation program on 15 th of Aug'21 with support of DBF.	1500	2021-22

41	Vanoja	School Support Program (Digital Learning kit)	E-learning kit installation done at Z.P School Vanoja	48031	2021-22
42	Vanoja	Solar Street Lights	Installed 5 Solar Street Lights	80000	2021-22
43	Vanoja	Community mobilization & convergence	1.Awareness meetings regarding different veternary ongonig schemes. Application received from interested villagers and applied through online process. 2.Scheme of free MS-CIT course (Rs.4500) from ICDS dept. for girl student only.Application collected and submitted in ICDS dept.	200	2021-22
44	Vanoja	installation	1000 LPH capacity RO unit installation done at Vanoja	342200	2021-22
45	Vanoja	Shade construction for RO unit	Work is going on.will complete in next 10-12 days.	307743	2021-22
46	Vanoja	Sitting Cement Benches	15 cement benches installed at village Vanoja.	47790	2021-22
47	Vanoja	Celebration of safety week	Celebrated AKAM.Rangoli competetion	1350	2021-22
48	Vanoja	Health & Sanitation: Project BaaLa	Awareness through 10 identified BaaLa associate regarding menustrual hygine and selling of reusable sanitory napkeen pads in their own village & nearby villages as an livelihood activity.	0	2022-23
49	Vanoja	Veternery health checkup camp	Dalmia Bharat Foundation and Veterinary department jointly conducted veterinary camp at Vanoja village in Korpana block. Extension officer (Vet.)-panchayat samiti Korpana Dr. Rathore, Dr. Kinkhede and supporting staff were present in the camp. Total cattles 450 in which 320 cattles (Cow, Bullock, buffalo) & 130 Goats treated through this camp	12000	2022-23
50	Vanoja	Digital Anganwadi Initiative	E-Learning kit setup & installation in one Anganwadi of vanoja	36823	2022-23
51	Vanoja	Beautification of Sites	Paver block fixing at govt. Z.P school vanoja	189866	2022-23
52	Vanoja	RO shade	Construction of RO shade at Vanoja	307743	2022-23
53	Vanoja	Livelihood Trainings to SHG women members & Girls	"Entrepreneurship Development training program" in nearby villages for women SHG members & for girls like Bakery products making training, Fast food, Pickle & Papad, poultry etc. Inauguration done by Sh. Abhishek Kumar Mishra (HR-Head) & Awdhut Musale (HR-IR). Total beneficiary:52 women members	26000	2022-23
54	Vanoja	Sustainable Agriculture	Knapsack Power Spray Distribution to farmers: No. of beneficiary farmer:11 Beneficiary contribution: 40% Objective: 1.To save time, pump rent, and labour cost. Etc 2.On time pest control at the time of critical stage of crops 3.To save the crop from heavy infestation of pest & diseases attack 4.Ultimately to increase the productivity of the crop	21120	2022-23
55	Vanoja	Sustainable Agriculture: seed treatment demonstration	Dalmia Bharat Foundation and Taluka Agriculture department Korpana jointly organized Soyabean seed treatment demonstration program prior seed sowing (kharip season) at Antargaon & Vanoja project villages. The main objective of this program is to facilitate the farmers to protect their crop from seed borne diseases. Application of fungicide to protect the crop from fungal infection, application of insecticide is to protect the crop from pest attack and application of Rhizobium bio-fertilizer is to fix the aerobic nitrogen fixation so that more nodule formation at root level and ultimately will increase the production of soyabean per acre. Total 75 farmer participants registered for the program.	1500	2022-23
56	Antargaon	Support to Polio Vaccination campaign	DBF supports in mobilization by awareness campaign to Primary Health Centre by displaying banners	750	2020-21

57	Antargaon	Support in Covid-19 vaccination awareness campaign to PHC Naranda	Displayed the Covid-19 vaccination awareness banners in village.	700	2020-21
58	Antargaon	"Breath Safe" Initiative :	Distributed 300 N-95 mask and 3 layer cotton mask to safegaurd against covid-19	9000	2020-21
59	Antargaon	School Support Program (Digital Learning kit)	E-learning kit installation done at Z.P School, Antargaon	48000	2021-22
60	Antargaon	Solar Street Lights	Installed 3 Solar street lights	48000	2021-22
61	Antargaon	Community mobilization & convergence	1.Awareness meetings regarding different veternary ongonig schemes. Application received from interested villagers and applied through online process. 2.Scheme of free MS-CIT course (Rs.4500) from ICDS dept. for girl student only.Application collected and submitted in ICDS dept.	200	2021-22
62	Antargaon	Celebration of safety week	Celebrated AKAM. Mehandi competition at grampanchayat Antargaon	1200	2021-22
63	Antargaon	Health Check-up Camp	Organized health checkup for pregnant women, counselling and treatment camp of B.P., Sugar, cancer at PHC Sub-Center Antargaon. 25 protein powder tin distributed to pregnant women. Sarpanch Ms.Pode, Medical officer Shri.Bavane, CHO-Ms. Puja dandekar were present in the program. Total beneficiaries 70.	2500	2022-23
64	Antargaon	Health & Sanitation: Project BaaLa	Awareness through 10 identified BaaLa associate regarding menustrual hygine and selling of reusable sanitory napkeen pads in their own village & nearby villages as an livelihood activity.	1500	2022-23
65	Antargaon	Veternery health checkup camp	Dalmia Bharat Foundation and Veterinary department jointly conducted veterinary camp at Antargaon, Sangoda, Vanoja, Kadholi kh, Pipari, Naranda village in Korpana block. Extension officer (Vet.)-panchayat samiti Korpana Dr. Rathore, Dr. Kinkhede and supporting staff were present in the camp. Total cattles 450 in which 320 cattles (Cow, Bullock, buffalo) & 130 Goats treated through this camp	12000	2022-23
66	Antargaon	Digital Anganwadi	E-Learning kit setup & installation in two Anganwadi under Digital Anganwadi Initiative	73647	2022-23
67	Antargaon	Library Development Support	Provided 100 books of competitative exams like mpsc,upsc,panchayat samiti,zilla parishad to village youths	35400	2022-23
68	Antargaon	Micro-enterprises: Paper Plate (disposable) making	DBF supported to purchase raw material to women SHG No. of Beneficiary: 10	30000	2022-23
69	Antargaon	Sustainable Agriculture	Knapsack Power Spray Distribution to farmers: No. of beneficiary farmer:42 Beneficiary contribution: 40% Objective: 1.To save time, pump rent, and labour cost. Etc 2.On time pest control at the time of critical stage of crops 3.To save the crop from heavy infestation of pest & diseases attack 4.Ultimately to increase the productivity of the crop	80640	2022-23
70	Antargaon	Plantation	100 sapling plantation done on the occasion of environment day	650	2022-23
71	Sangoda	Support to Polio Vaccination campaign	DBF supports in mobilization by awareness campaign to Primary Health Centre by displaying banners	700	2021-22
72	Sangoda	Support in Covid-19 vaccination awareness campaign to PHC Naranda	Displayed the Covid-19 vaccination awareness banners in village.	900	2021-22
73	Sangoda	"Breath Safe" Initiative	Distributed 500 N-95 mask and 3 layer cotton mask to safegaurd against covid-19	15000	2021-22

74	Sangoda	Solar Street Lights	Installed 6 Solar street lights	96000	2021-22
	Sangoda	(Qty.20) Anganwadi Refurbishment (Digital Learning set)	E learning kit installation done at Anganwadi sangoda	36823	2021-22
76	Sangoda	Support to Anganwadi Sangoda	LPG Gas Cylinder (Qty.2) + Shegadi to anganwadi for mid day meal cooking on request of letter received from Sarpanch Sangoda.	8000	2021-22
77	Sangoda	Community mobilization & convergence	1.Awareness meetings regarding different veternary ongonig schemes. Application received from interested villagers and applied through online process. 2.Scheme of free MS-CIT course (Rs.4500) from ICDS dept. for girl student only.Application collected and submitted in ICDS dept.	0	2021-22
78	Sangoda	Celebration of safety week	Celebrated AKAM. Rangoli cometition in ZP school sangoda	1500	2021-22
79	Sangoda	Arogya Melava	PHC Sub center Antargaon & Dalmia Bharat Foundation Naranda organized "Arogya Melava" at Sangoda Dr.Lande medical officer of PHC Nanda fata & supporting staff of PHC, Sarpanch Sangoda Mrs. Ranjana Bonde, Asha worker present in the program. Objective of this program is to counselling, personal hygiene, disease, symptoms, treatment, nutrition and awareness about schemes for pregnant women. Total beneficiary of the health camp 94.	8500	2022-23
80	Sangoda	Veternery health checkup camp	Dalmia Bharat Foundation and Veterinary department jointly conducted veterinary camp at Antargaon, Sangoda, Vanoja, Kadholi kh, Pipari, Naranda village in Korpana block. Extension officer (Vet.)-panchayat samiti Korpana Dr. Rathore, Dr. Kinkhede and supporting staff were present in the camp. Total cattles 450 in which 320 cattles (Cow, Bullock, buffalo) & 130 Goats treated through this camp	12000	2022-23
81	Sangoda	Beautification of site	Beautification of village Entry Gate Sangoda	78000	2022-23
82	Sangoda	Library Development Support	Provided Books, 8 Tables & 8 Chairs,1 Cupboard.	78970	2022-23
83	Sangoda	Support to Kabaddi Sports	Provided Kabaddi Sports Kit to team (14 qty)	28000	2022-23
84	Sangoda	Sustainable Agriculture	Knapsack Power Spray Distribution to farmers: No. of beneficiary farmer:32 Beneficiary contribution: 40% Objective: 1.To save time, pump rent, and labour cost. Etc 2.On time pest control at the time of critical stage of crops 3.To save the crop from heavy infestation of pest & diseases attack 4.Ultimately to increase the productivity of the crop	61440	2022-23
85	Kadholi Kh	Support in Covid-19 vaccination awareness campaign to PHC Naranda	awareness banner displayed in village	700	2020-21
86	Kadholi Kh	"Breath Safe" Initiative :	Distributed 400 N-95 mask and 3 layer cotton mask to safegaurd against covid-19	12000	2020-21
86 87	Kadholi Kh Kadholi Kh	"Breath Safe" Initiative : Solar Street Lights		12000 48000	2020-21
87			safegaurd against covid-19		

			Dalmia Bharat Foundation and Veterinary department jointly		
90	Kadholi Kh	Veternery health checkup camp	conducted veterinary camp at Kadholi kh village in Korpana block. Extension officer (Vet.)-panchayat samiti Korpana Dr. Rathore , Dr. Kinkhede and supporting staff were present in the camp. Total cattles 450 in which 320 cattles (Cow, Bullock, buffalo) & 130 Goats treated through this camp	12000	2022-23
91	Kadholi Kh	Clean energy initiative: Solar street Light	Installation of Four Solar Street Light at Kadholi kh. No. of beneficiaries impacted: 382 HH No. of villages covered: 2	64000	2022-23
92	Kadholi Kh	Library Development Support	Provided 100 books of competitative exams like mpsc,upsc,panchayat samiti,zilla parishad to village youths , 1 cupboard, 1 floor mat.	37850	2022-23
93	Pipari	"Breath Safe" Initiative :	Distributed 150 N-95 mask and 3 layer cotton mask to safegaurd against covid-19 .also distributed to Loni,kadholi kh,sheraj bk Grampanchayat. Sheraj bk -200,Police station korpana-200,Tehsil korpana-200,BDO Panchayat samiti-100,District office-250	4500	2020-21
94	Pipari	School Support Program (Digital Learning kit)	E-learning kit installation done at Z.P School Pipari	48000	2021-22
95	Pipari	Solar Street Lights	Installed 3 Solar Street Lights	48000	2021-22
96	Pipari	Community mobilization & convergence	1.Awareness meetings regarding different veternary ongonig schemes. Application received from interested villagers and applied through online process. 2.Scheme of free MS-CIT course (Rs.4500) from ICDS dept. for girl student only.Application collected and submitted in ICDS dept.	200	2021-22
97	Pipari	Beautification of Sites	Paver block fixing at govt. Z.P school Pipari	189866	2022-23
98	Pipari	Digital Anganwadi initiative	E-Learning kit setup & installation in two Anganwadi under Digital Anganwadi Initiative	73647	2022-23
	Support to district health Hospital,Chan drapur in covid vaccination drive	100000 A.D. Syring support through District collector to District Health Officer.Cost 4.25 lakh	Distributed in all taluka of chandrapur district	425000	2021-22
100	Pipari/Vanoja /mines area	water Harvesting structures	No. of Recharge Pit: 10 Villages covered: 1.Vanoja 2. Pipari 3.mines area Total Water Harvesting capacity created: 3.28 Lakh KL	474124	2022-23
101	Naranda/van oja/sangoda	Plantation	plantation program	850000	2022-23
102	Naranda	HP-World On Wheels- WoW	Digital Literacy Program in core villages	292000	2023-24
103	Naranda	Health	Support to PHC Naranda for awareness	10000	2023-24
104	Naranda	gramparivartan-Skills & Liveliood-Power spray pump	Battery operated power spray distribution to farmers for ontime pest & diseses control in Karip & rabbi crop.	124800	2023-24
105	Wanoja	gramparivartan-Skills & Liveliood-Power spray pump	Battery operated power spray distribution to farmers for ontime pest & diseses control in Karip & rabbi crop.	64950	2023-24
106	Sangoda	gramparivartan-Skills & Liveliood-Power spray pump	Battery operated power spray distribution to farmers for ontime pest & diseses control in Karip & rabbi crop.	40000	2023-24
107	Loni	gramparivartan-Skills & Liveliood-Power spray pump	Battery operated power spray distribution to farmers for ontime pest & diseses control in Karip & rabbi crop.	30900	2023-24
108	Pipari	gramparivartan-Skills & Liveliood-Power spray pump	Battery operated power spray distribution to farmers for ontime pest & diseses control in Karip & rabbi crop.	54000	2023-24
109	Kadholi Kh	gramparivartan-Skills & Liveliood-Power spray pump	Battery operated power spray distribution to farmers for ontime pest & diseses control in Karip & rabbi crop.	64950	2023-24

110	Antargaon	gramparivartan-Skills & Liveliood-Power spray pump	Battery operated power spray distribution to farmers for ontime pest & diseses control in Karip & rabbi crop.	90000	2023-24
111	Bori Naveaon	gramparivartan-Skills & Liveliood-Power spray pump	Battery operated power spray distribution to farmers for ontime pest & diseses control in Karip & rabbi crop.	30000	2023-24
112	Karvai	gramparivartan-Skills & Liveliood-Power spray pump	Battery operated power spray distribution to farmers for ontime pest & diseses control in Karip & rabbi crop.	20000	2023-24
113	Sangoda	Social infra-unit continency	Pipeline for drainae at villae sanoda	142000	2023-24
114	Naranda	gramparivartan-Skills & Liveliood-Peromone & yellow sticky trap	Oranic pest control metod in cotton, soyabean, benal ram,cilli and veetable. It reduces te input cost of farmers and saves te cop from eavy infestation of pest and diseases.	140000	2023-24
115	Wanoja	gramparivartan-Skills & Liveliood-Peromone & yellow sticky trap	Oranic pest control metod in cotton, soyabean, benal ram,cilli and veetable. It reduces te input cost of farmers and saves te cop from eavy infestation of pest and diseases.	100000	2023-24
116	Sangoda	gramparivartan-Skills & Liveliood-Peromone & yellow sticky trap	Oranic pest control metod in cotton, soyabean, benal ram,cilli and veetable. It reduces te input cost of farmers and saves te cop from eavy infestation of pest and diseases.	70000	2023-24
117	Loni	gramparivartan-Skills & Liveliood-Peromone & yellow sticky trap	Oranic pest control metod in cotton, soyabean, benal ram,cilli and veetable. It reduces te input cost of farmers and saves te cop from eavy infestation of pest and diseases.	50000	2023-24
118	Pipari	gramparivartan-Skills & Liveliood-Peromone & yellow sticky trap	Oranic pest control metod in cotton, soyabean, benal ram,cilli and veetable. It reduces te input cost of farmers and saves te cop from eavy infestation of pest and diseases.	70000	2023-24
119	Kadholi Kh	gramparivartan-Skills & Liveliood-Peromone & yellow sticky trap	Oranic pest control metod in cotton, soyabean, benal ram,cilli and veetable. It reduces te input cost of farmers and saves te cop from eavy infestation of pest and diseases.	40000	2023-24
120	Antargaon	gramparivartan-Skills & Liveliood-Peromone & yellow sticky trap	Oranic pest control metod in cotton, soyabean, benal ram,cilli and veetable. It reduces te input cost of farmers and saves te cop from eavy infestation of pest and diseases.	85000	2023-24
121	Bori Naveaon	gramparivartan-Skills & Liveliood-Peromone & yellow sticky trap	Oranic pest control metod in cotton, soyabean, benal ram,cilli and veetable. It reduces te input cost of farmers and saves te cop from eavy infestation of pest and diseases.	30000	2023-24
122	Karvai	gramparivartan-Skills & Liveliood-Peromone & yellow sticky trap	Oranic pest control metod in cotton, soyabean, benal ram,cilli and veetable. It reduces te input cost of farmers and saves te cop from eavy infestation of pest and diseases.	11000	2023-24
123	Naranda,Wan oja,Bori Naveaon, Kadoli, Loni,Pipari	Borewell recharge pit	Created te water arvestin capacity of 2.50 Lak.KL	910000	2023-24
	Naranda,Wan oja,Sanoda,Bo ri Naveaon, Kadoli, Loni,Pipari,m ykalpur,Antar aon,karwai	gramparivartan-Skills & Liveliood-Solar Light Trap	Sustainable Ariculture:Oranic pest control metod in cotton , soyabean, benal ram,cilli and veetable. It reduces te input cost of farmers and saves te cop from eavy infestation of pest and diseases.	433155	2023-24
	Naranda	gramparivartan-Skills & Liveliood-Panipuri tela	Microenterprise	9600	2023-24
	Naranda,Wan oja,Sanoda Loni,Pipari,An taraon,karwai	gramparivartan-Skills & Liveliood-Seed treatment	Sustainable Agriculture: Packae of practices	9000	2023-24

Naranda,Wan oja,Sanoda Loni,Pipari,An taraon,karwai	gramparivartan-Skills & Liveliood-Linseed	New introduction of crop	9000	2023-24
Naranda,Wan oja,Sanoda,Bo ri Naveaon, Kadoli, Loni,Pipari,m ykalpur,Antar aon,karwai	gramparivartan-Skills & Liveliood-Azolla	Azolla as a fodder introduced for livestock: it will increase te milk production and weit ain in cow and buffalo	41300	2023-24
Naranda,Wan oja,Sanoda,Bo ri Naveaon, Kadoli, Loni,Pipari,m ykalpur,Antar aon,karwai	gramparivartan-Skills & Liveliood-Vermicompost	Sustainable Agriculture: vermicompost	102660	2023-24
		Total	9894811	

ANNEXURE-III LANDUSE/LAND COVER OF NARANDA LIMESTONE MINE

1 LANDUSE/LAND COVER OF THE SURROUNDING AREA

Current vintage data of Indian Remote Sensing Satellite Sentinel-2 Land Cover been used for the preparation of the Land use/ Land cover thematic map of the study area.

These models were applied to the entire Sentinel-2 scene collection for each year from 2017 to 2022 that's over 2,000,000 Earth observations from 6 spectral bands to produce the maps.


The output provides a 9-class map of the surface, including vegetation types, bare surface, water, cropland and built areas. These maps are available from ArcGIS Living Atlas of the World.

Table 1: Technical Description

S. No.	Particulars	Détails
1.	Satellite Image	Sentinel-2
2.	Satellite Data Source	ArcGIS Living Atlas

Table 2: LULC Classification

S.NO.	Class	Area Sqm	Area Sqkm	Percentage Distribution %
1.	Water	5707800	5.71	1.82
2.	Tree	2371400	2.37	0.76
3.	Cropland	247878600	247.88	78.98
4.	Built Area	9873600	9.87	3.15
5.	Range Land	864200	0.86	0.28
6.	Bare Ground	47136600	47.14	15.02
	Total		314.15	100

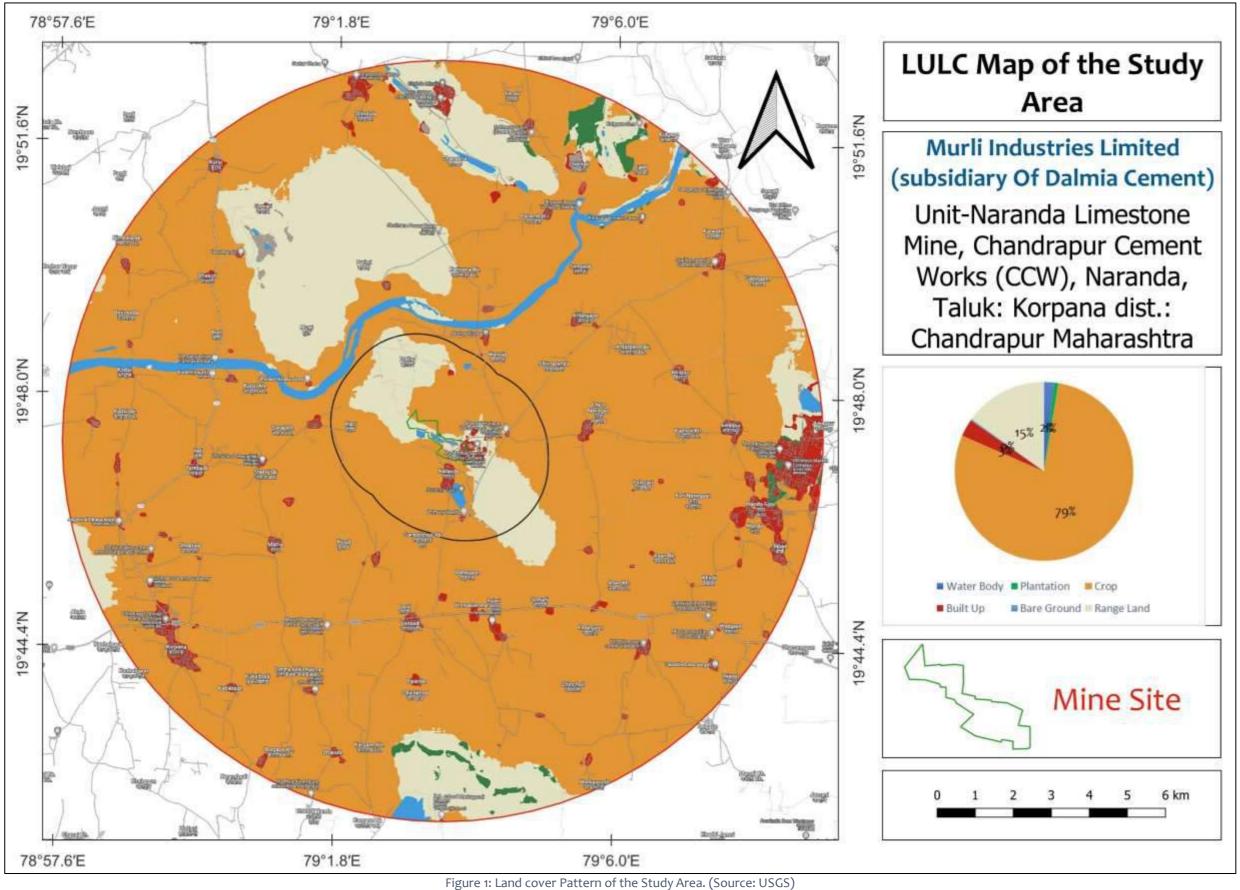

RAINWATER HARVESTING MEASURES





Naranda Village (RWH-1)

Naranda Village (RWH-2)

Naranda Village (RWH-3)



Naranda Village (RWH-4)



Naranda Village (RWH-5)



Plant Site (RWH-6)









Pimpri Village (RWH-7) Pimpri Village (RWH-8)


Pimpri Village (RWH-9)

Loni Village (RWH-10)









Bori Navegaon Vill. (RWH-11)

Kadholi Kh Vill.(RWH-12)

Wanoja Village (RWH-13) Wanoja Village (RWH-14)



Zutting Village (RWH-15)



Zutting Village (RWH-16)



Zutting Village (RWH-17)



Zutting Village (RWH-18)



Zutting Village (RWH-19)



Zutting Village (RWH-20)


DEEPENING OF POND NEAR NARANDA VILLAGE





PHOTOGRAPHS OF PIEZOMETER AT PLANT AND MINE





Piezometer - Mines



Piezometer - Plant

GROUND WATER LEVEL MONITORING DATA

Sr. No.	Month	Ground Water Leve BGL in	
		Core Zone	Buffer Zone
1	Feb-22	23.91	21.96
2	Mar-22	23.83	21.65
3	Apr-22	23.85	21.66
4	May-22	20.72	16.92
5	Jun-22	12.93	6.27
6	Jul-22	13.39	7.11
7	Aug-22	15.8	8.14
8	Sep-22	16.98	10.24
9	Oct-22	16.35	10.36
10	Nov-22	22.19	18.24
11	Dec-22	20.2	15.86
12	Jan-23	20.75	19.25
13	Feb-23	18.57	20.95
14	Mar-23	20.83	22.13
15	Apr-23	20.58	21.54
16	May-23	21.16	20.98
17	Jun-23	13.33	20.92
18	Jul-23	14.56	10.13
19	Aug-23	15.98	11.52
20	Sep-23	17.77	11.98
21	Oct-23	16.83	12.96
22	Nov-23	23.43	19.87
23	Dec-23	21.6	17.5
24	Jan-24	20.8	18.6
25	Feb-24	19.2	20.1
26	Mar-24	20.8	21.3
	Avg.	19.09	16.47



Dayal Estate, National Highway No.8, Opp APMC Market Gate-1, Jetalpur, District-Ahmedabad-382426 Gujarat. INDIA

Mobile No: +91-7069072001

Email Id: lab@gogreenmechanisms.com

CERTIFICATE OF ANALYSIS

Report Number: GGMPL/PN/2521C/69/V13/15A

Dalmia Cement (Bharat) Ltd.

Naranda Limestone Mine Village Naranda, Tahsil Korpana, Dist-Chandrapur

Lab/PN/2521C/69/V13/15

Laboratory Representative

Reporting Date: 18/03/2024

SAMPLE DETAILS

Lab ID:

Sample Drawn By:

Sample Type: Sample Description:

Sample Quantity: Sample Condition: Soil Mine Pit 2 Kg

Satisfactory

Sampling Date:

Sample Receipt Date:

Analysis Start Date: Analysis End Date:

Sampling Method: Packing:

GGMPL/WI/27F Sealed

06/03/2024

10/03/2024

11/03/2024

16/03/2024

Sr.No	Parameters*	Results	Unit	Test Method	Norm
1	Sulphate	27.32	mg/kg	IS 2720(Part 27)-1977 (RA 2015)	ž.
2	Phosphorus As P	BQL (QL=2)	mg/kg	GGMPL/SOP/SOIL/44	
3	Nitrate	8.02	mg/kg	GGMPL/SOIL/SOP-57	-2
4	Exchangeable Calcium	80.30	meq/100gm	IS 5949: 2003	

NS=Not Specified, BQL=Below Quantification Limit,QL= Quantification L

Priyanka Shrimali

Authorized Signatory Manish Kumawat

Page No: 1/1

Terms & Conditions:

This test report document no GGMPL/F/7.7/05 shall not be reproduced except in full, without written approval from Go Green Mechanisms Pvt. Ltd. Test results furnished herein this report to the sample received. Report cannot be used as an evidence anywhere without prior permission. Total liability of our institution is limited to the invoiced amount. Endorsement of products is neither inferred nor implied. The sample(s) to which the findings recorded herein (the "Findings") relate was (were) drawn and / or provided by the client or by a third party acting at the client's direction. The findings constitute no warranty of the sample's representativeness of any goods and strictly relate to the sample (s). The Company accepts no liability with regard to the origin or source from which the sample(s) is/are said to be extracted. This document is issued by the Company under its General Conditions of Service available on request. Attention is drawn to the limited of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample (s) tested and such sample(s) are retained for 7 days (in case of perishable items) and 15 days for air/ water/hazardous waste samples and 30 days for soil samples. The samples from regulatory bodies are to be retained as specified. This document cannot be reproduced except in full, without prior written approval of the company. Any dispute arising out of this test report is subject to Ahmedabad jurisdiction.

Annexure IV – Showing Pictorial view of Protective Measures around dump area Garland Drain and Plantation developed around the periphery of Dump area



Retaining wall and Plantation developed around the periphery of Overburden Dump and Soil dump as protective measure



GREEN BELT & PLANTATION IN NARANDA LIMESTONE MINE



Plantation at Mines Lease Boundary



Plantation along the Mines Road



New Plantation at Mines Area

GREEN BELT & PLANTATION IN NARANDA LIMESTONE MINE







Plantation at Mines Dump Area



Dayal Estate, National Highway No.8, Opp APMC Market Gate-1, Jetalpur, District-Ahmedabad-382426 Gujarat. INDIA

Mobile No: +91-7069072001

Email Id: lab@gogreenmechanlsms.com

CERTIFICATE OF ANALYSIS

Report Number: GGMPL/PN/2281C/69/V12/01

Dalmia Cement (Bharat) Ltd.

Naranda Limestone Mine Village Naranda, Tahsil Korpana, Dist-Chandrapur

Reporting Date: 17/02/2024



SAMPLE DETAILS

Lab ID:

Sample Drawn By: Sample Type:

Sample Description:

Sample Condition:

Sample Quantity:

4.5 L

Lab/PN/2281C/69/V12/01 Laboratory Representative

Water

Ground Water of Mine Pit

Satisfactory

Sampling Date:

Sample Receipt Date: Analysis Start Date: Analysis End Date:

Sampling Method:

Packing:

07/02/2024

10/02/2024 12/02/2024 16/02/2024

GGMPL/WI/27A Sealed

Sr.No	Parameters	Results	Unit	Test Method	Norm
1	Alkalinity as CaCO3	280.00	mg/L	APHA 23rd Edn 2320 B	(-)
2	BOD at 27 oC for 3 days	6.0	mg/L	IS 3025-Part 44	
3	Chemical Oxygen Demand (COD)	30.00	mg/L	APHA 23rd Edn 5220 B	
4	Chloride	80.97	mg/L	IS 3025- Part 32	
5	Conductivity	776.00	uS/cm	IS 3025- Part 14	-
6	Oil and Grease	BQL (QL=1)	mg/L	IS 3025- Part 39	-
7	pH at 25 °C	7.60		IS 3025- Part 11	(e)
8	Sulphate	68.31	mg/L	APHA 23rd Edn 4500 SO4 E	-1
9	Total Dissolved Solids (TDS)	492.00	mg/L	APHA 23rd Edn 2540 C	8
10	Total Hardness as CaCO3	322.00	mg/L	APHA 23rd Edn 2340 C	College Name of the
11	Total Suspended Solids (TSS)	8.00	mg/L	APHA 23rd Edn 2540 D	-
12	Iron as Fe	0.174	mg/L	APHA 23rd Edn 3120 B	

NS=Not Specified, BQL=Below Quantification Limit,QL= Quantification Limit





Authorized Signatory Manish Kumawat

Page No: 1/2

Terms & Conditions:
This test report document no GGMPL/F7.7/05 shall not be reproduced except in full, without written approval from Go Green Mechanisms Pvt. Ltd. Test results furnished herein this report to the sample received. Report cannot be used as an evidence onywhere without prior permission. Total liability of our institution is limited to the involced amount. Endorsement of products is neither inferred nor implied. The sample(s) to the findings recept and liability with regard to the origin or source from which the sample(s) is a said to be extracted. This document is issued by the Company under its General Conditions of Service available on request. Attention is drawn to the limited of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not examerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlowful and offenders may be prosecuted to the fullest extent of the low. Unless otherwise stated the results shown in this test report refer only to the sample (s) tested and such sample(s) are retained for 7 days (in case of perishable items) and 15 days for aid waterhazordous waste samples and 30 days for soil samples. The samples from regulatory bodies are to be retained as specified. This document cannot be reproduced except in full, without prior written approval of the company. Any dispute arising out of this test report is subject to Ahmedabad jurisdiction.



Dayal Estate, National Highway No.8, Opp APMC Market Gate-1, Jetalpur, District-Ahmedabad-382426 Gujarat. INDIA

Mobile No: +91-7069072001

Email Id: lab@gogreenmechanisms.com

CERTIFICATE OF ANALYSIS

Report Number: GGMPL/PN/2281C/69/V12/01

Dalmia Cement (Bharat) Ltd.

Naranda Limestone Mine Village Naranda, Tahsil Korpana, Dist-Chandrapur



SAMPLE DETAILS

Lab ID:

Lab/PN/2281C/69/V12/01

Sampling Date:

07/02/2024

Sample Drawn By: Sample Type:

Laboratory Representative

Sample Receipt Date: Analysis Start Date:

10/02/2024 12/02/2024

Sample Description:

Ground Water of Mine Pit

Analysis End Date:

16/02/2024 GGMPL/WI/27A

Sample Quantity:

4.5 L

Sampling Method:

Sample Condition:

Satisfactory

Packing:

Sealed

Sr.No	Parameters	Results	Unit	Test Method	Norm
13	Carbonate as CaCO3	BQL (QL=2)	mg/L	APHA 23rd Edn 2320 B	•
14	Bi Carbonate as CaHco3	280.00	mg/L	APHA 23rd Edn 2320 B	
15	Nitrate	1.89	mg/L	APHA 23rd Edn 4500 NO3 B	S#7

NS=Not Specified, BQL=Below Quantification Limit,QL= Quantification Limit



-- End of Report --

AHMEDABAD

Authorized Signatory Manish Kumawat

Page No: 2/2

Terms & Conditions:

Terms & Conditions:

This test report document no GGMPLF7.7/05 shall not be reproduced except in full, without written approval from Go Green Mechanisms Pvt. Ltd. Test results furnished herein this report to the sample (s) to which the findings recorded herein (the "Findings") relate was (were) drawn and / or provided by the client or by a third party acting at the client's direction. The findings constitute no warranty of the sample's representativeness of any goods and strictly relate to the sample (s). The Company accepts no liability with regard to the origin or source from which the sample(s) is/are soid to be extracted. This document is issued by the Company under its General Conditions of Service available on request. Attention is drawn to the limited of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the company's findings at the time of its intervention only and within the limits of client's instructions. If any. The Company's sole responsibility is to its Client and this document does not excended parties to a transaction form exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or folistication of the content or appearance of this document is unlawful and affenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample (s) tested and such sample(s) are retained for 7 days (in case of perishable items) and 15 days for air water/hazardous waste samples and 30 days for soil samples. The samples from regulatory bodies are to be retained as specified. This document cannot be reproduced except in full, without prior written approval of the company. Any dispute arising out of this test report is subject to Ahmedabad jurisdiction.



Dayal Estate, National Highway No.8, Opp APMC Market Gate-1, Jetalpur, District-Ahmedabad-382426 Gujarat. INDIA

Mobile No: +91-7069072001

Email Id: lab@gogreenmechanisms.com

CERTIFICATE OF ANALYSIS

Report Number: GGMPL/PN/1570C/69/V8/01 Dalmia Cement (Bharat) Ltd.

Naranda Limestone Mine Village Naranda, Tahsil Korpana, Dist-Chandrapur

Reporting Date: 18/11/2023



TC-7073

SAMPLE DETAILS

Sampling Date: 03/11/2023 Lab ID: Lab/PN/1570C/69/V8/01 Sample Receipt Date: 06/11/2023 Laboratory Representative Sample Drawn By: Analysis Start Date: 07/11/2023 Sample Type: Water Sample Description: G.W of Naranda Mine Borewell Analysis End Date: 17/11/2023 Sampling Method: GGMPL/WI/27A Sample Quantity: 3.5L Sample Condition: Satisfactory Packing: Sealed

Sr.No	Parameters	Results	Unit	Test Method	Norm
1	Alkalinity as CaCO3	265.00	mg/L	APHA 23rd Edn 2320 B	-
2	BOD at 27 oC for 3 days	BQL (QL=2)	mg/L	IS 3025-Part 44	
3	Chemical Oxygen Demand (COD)	BQL (QL=5)	mg/L	APHA 23rd Edn 5220 B	-
4	Chloride	58.48	mg/L	IS 3025- Part 32	
5	Oil and Grease	BQL (QL=1)	mg/L	IS 3025- Part 39	
6	pH at 25 °C	6.86	-	IS 3025- Part 11	
7	Sulphate	72.14	mg/L	APHA 23rd Edn 4500 SO4 E	- 'es•
8	Total Dissolved Solids (TDS)	655.00	mg/L	APHA 23rd Edn 2540 C	-
9	Total Hardness as CaCO3	468.00	mg/L	APHA 23rd Edn 2340 C	-
10	Total Suspended Solids (TSS)	5.00	mg/L	APHA 23rd Edn 2540 D	
11	Iron as Fe	0.96	mg/L	APHA 23rd Edn 3120 B	
12	Carbonate as CaCO3	BQL (QL=2)	mg/L	APHA 23rd Edn 2320 B	

NS=Not Specified, BQL=Below Quantification Limit,QL= Quantification Limit





Authorized Signatory Manish Kumawat

Page No: 1/2

erms & Conditions :

This test report document no GGMPL/F/7.7/05 shall not be reproduced except in full, without written approval from Go Green Mechanisms Pvt. Ltd. Test results furnished herein this report to the sample received. Report cannot be used as an evidence anywhere without prior permission. Total liability of our institution is limited to the invoiced amount. Endorsement of products is neither inferred nor implied. The sample(s) to which the findings recorded herein (the "Findings") relate was (were) drawn and / or provided by the client or by a third party acting at the client's direction. The findings constitute no warranty of the sample's representativeness of any goods and strictly relate to the sample or the product of th



Dayal Estate, National Highway No.8, Opp APMC Market Gate-1, Jetalpur, District-Ahmedabad-382426 Gujarat. INDIA

Mobile No: +91-7069072001

Email Id: lab@gogreenmechanisms.com

CERTIFICATE OF ANALYSIS

Report Number: GGMPL/PN/1570C/69/V8/01

Dalmia Cement (Bharat) Ltd. Naranda Limestone Mine Village Naranda, Tahsil Korpana, Dist-Chandrapur Reporting Date: 18/11/2023



TC-7073

SAMPLE DETAILS

Lab/PN/1570C/69/V8/01

Sampling Date:

03/11/2023

Sample Drawn By:

Laboratory Representative

Sample Receipt Date:

06/11/2023

Sample Type:

Water

Analysis Start Date:

07/11/2023 17/11/2023

Sample Description:

G.W of Naranda Mine Borewell

Analysis End Date: Sampling Method:

GGMPL/WI/27A

Sample Quantity:

3.5L Satisfactory

Packing:

Sealed

Sample Condition:	Satisfactory	Packing:	

Sr.No	Parameters	Results	Unit	Test Method	Norm
13	Bi Carbonate as CaHco3	265.00	mg/L	APHA 23rd Edn 2320 B	-
14	Conductivity	825	mS/cm	IS 3025- Part 14	-
15	Nitrate	4.39	mg/L	APHA 23rd Edn 4500 NO3 B	-

NS=Not Specified, BQL=Below Quantification Limit,QL= Quantification Limit





Authorized Signatory Manish Kumawat

Page No: 2/2

This test report document no GGMPL/F7.7/05 shall not be reproduced except in full, without written approval from Go Green Mechanisms Pvt. Ltd. Test results furnished herein this report to the sample received. Report cannot be used as an evidence anywhere without prior permission. Total liability of our institution is limited to the invoiced amount Endorsement of products is neither inferred nor implied. The sample(s) to which the findings recorded herein (the "Findings") relate was (were) drawn and / or provided by the client or by a third party acting at the client's direction. The findings constitute no warranty of the sample's representativeness of any goods and strictly relate to the sample (s). The Company accepts no liability with regard to the origin or source from which the sample(s) isfore sold to be extracted. This document is issued by the Company under its General Conditions of Service available on request. Attention is drawn to the limited of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample (s) tested and such samples) are retained for 7 days (in case of perishable items) and 15 days for air/ water/hazardous waste samples and 30 days for soil samples. The samples from regulatory bodies are to be retained as specified. This document cannot be reproduced except in full, without prior written approval of the co ny. Any dispute arising out of this test report is subject to Ahmedobad Jurisdiction.



Dayal Estate, National Highway No.8, Opp APMC Market Gate-1, Jetalpur, District-Ahmedabad-382426 Gujarat. INDIA

Mobile No: +91-7069072001

Email Id: lab@gogreenmechanisms.com

CERTIFICATE OF ANALYSIS

Report Number: GGMPL/PN/1102C/69/V4/01

Dalmia Cement (Bharat) Ltd.

Naranda Limestone Mine Village Naranda Pimpri, Tahsil Korpana, Dist-

Chandrapur

Reporting Date: 07/09/2023



TC-707

SAMPLE DETAILS

Lab ID: Sample Drawn By: Lab/PN/1102C/69/V4/01 Laboratory Representative

Water

Sample Type: Sample Description:

G.W Of Naranda Borewell

3.5L

Sample Quantity: Sample Condition:

Satisfactory

Sampling Date: 29/08/2023 Sample Receipt Date: 31/08/2023

Analysis Start Date: Analysis End Date: Sampling Method: 01/09/2023 06/09/2023 GGMPL/WI/27A

Packing:

Sealed

Sr.No	Parameters	Results	Unit	Test Method	Norm
1	Alkalinity as CaCO3	182.00	mg/L	APHA 23rd Edn 2320 B	-
2	BOD at 27 oC for 3 days	BQL (QL=2)	mg/L	IS 3025-Part 44	-
3	Chemical Oxygen Demand (COD)	BQL (QL=5)	mg/L	APHA 23rd Edn 5220 B	
4	Chloride	51.48	mg/L	IS 3025- Part 32	
5	Oil and Grease	BQL (QL=1)	mg/L	IS 3025- Part 39	afil
6	pH at 25 °C	7.56	-	IS 3025- Part 11	-
7	Sulphate	61.48	mg/L	APHA 23rd Edn 4500 SO4 E	-
8	Total Dissolved Solids (TDS)	784.00	mg/L	APHA 23rd Edn 2540 C	-
9	Total Hardness as CaCO3	204.00	mg/L	APHA 23rd Edn 2340 C	-
10	Total Suspended Solids (TSS)	BQL (QL=5)	mg/L	APHA 23rd Edn 2540 D	-
11	Iron as Fe	1.02	mg/L	APHA 23rd Edn 3120 B	(50)
12	Carbonate ac CaCO3	BQL (QL-2)	mg/L	APHA 23rd Edn 2320 B	

NS=Not Specified, BQL=Below Quantification Limit,QL= Quantification Limit

A. B. Pary

Analyzed By Aarmi Patel



Authorized Signatory Manish Kumawat

Page No: 1/2

Terms & Conditions

This test report document no GGMPL/F/7.7/05 shall not be reproduced except in full, without written approval from Go Green Mechanisms Pvt. Ltd. Test results furnished herein this report to the sample received. Report cannot be used as an evidence anywhere without prior permission. Total liability of our institution is limited to the invoiced amount. Endorsement of products is neither inferred nor implied. The sample(spito which the findings recorded herein (the "Findings") relate was (were) drawn and / or provided by the client or by a thirt party acting at the client's direction. The findings constitute no warrenty of the sample's representativeness of any goods and strictly relate to the sample (s). The Company accepts no liability with regard to the origin or source from which the sample(s) islare said to be extracted. This document is issued by the Company under its General Conditions of Service available on request. Attention is drawn to the limited of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the company's sindings at the time of its intervention only and within the limits of clients instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the low. Unless otherwise stated the results shown in this test report refer only to the sample (s) tested and such sample(s) are retained for 7 days (in case of perishable items) and 15 days for air/ water/hazardous waste samples and 30 days for soil samples. The samples from regulatory bodies are to be retained as specified. This document cannot be reproduced except in full, without prior written approval of the company. Any dispute arisin



Dayal Estate, National Highway No.8, Opp APMC Market Gate-1, Jetalpur, District-Ahmedabad-382426 Gujarat. INDIA

Mobile No: +91-7069072001

Email Id: lab@gogreenmechanisms.com

CERTIFICATE OF ANALYSIS

Report Number: GGMPL/PN/1102C/69/V4/01

Dalmia Cement (Bharat) Ltd.

Naranda Limestone Mine Village Naranda Pimpri, Tahsil Korpana, Dist-

Chandrapur

Reporting Date: 07/09/2023



SAMPLE DETAILS

Lab ID:

Lab/PN/1102C/69/V4/01

Sample Drawn By:

Laboratory Representative

Sample Type:

Water

Sample Description:

G.W Of Naranda Borewell

Sample Quantity: 3.5L

Sample Condition:

Satisfactory

29/08/2023 Sampling Date: Sample Receipt Date: 31/08/2023

01/09/2023 Analysis Start Date: Analysis End Date: 06/09/2023

GGMPL/WI/27A Sampling Method:

Packing: Sealed

Sr.No	Parameters	Results	Unit	Test Method	Norm
13	Bi Carbonate as CaHco3	182.00	mg/L	APHA 23rd Edn 2320 B	¥
14	Conductivity	994	mS/cm	IS 3025- Part 14	THE RELEASE SERVICE
15	Nitrate	2.21	mg/L	APHA 23rd Edn 4500 NO3 B	2

NS=Not Specified, BQL=Below Quantification Limit,QL= Quantification Limit

A. B. Posty

Analyzed By Aarmi Patel

Authorized Signatory Manish Kumawat

Page No: 2/2

Terms & Conditions:

This test report document no GGMPLF/7.7/05 shall not be reproduced except in full, without written approval from Ga Green Mechanisms Pvt. Ltd. Test results furnished herein this report to the sample received. Report cannot be used as an evidence anywhere without prior permission. Total liability of our institution is limited to the invoiced amount. Endorsement of products is neither inferred nor implied. The sample(s) to which the findings recorded herein (the "Findings") relate was (were) drawn and / or provided by the client or by a third party acting at the client's direction. The findings constitute no warranty of the sample's representativeness of any goods and strictly relate to the sample (s). The Company accepts no liability with regard to the origin or source from which the sample(s) is/are said to be extracted. This document is issued by the Company under its General Conditions of Service available on request. Attention is drawn to the limited of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not expense to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unlawful and offenders may be prosecuted to the fullest extent of the law. Unlawful and offenders may be prosecuted to the fullest extent of the law. Unlawful and offenders may be prosecuted to the fullest extent of the law. Unlawful and offenders may be prosecuted to the fullest extent of the law. Unlawful and offenders may be prosecuted to the fullest extent of the law. Unlawful and offenders may be prosecuted to the fullest extent of the law. Unlawful and offenders may be prosecuted to the fullest extent of the law. Unlawful and offenders may be prosecuted to the fullest extent of the law. Unlawful and offenders may be prosecuted to the fullest extent of the law. Unlawful and offenders may be prosecuted to the fullest extent of the law. Unlawful and offenders may be prosecuted to the fullest extent of the law. Unlawful and offenders may be prosecuted to the fullest extent of the law. Unlawful and offenders may be prosecuted to the fullest extent of the law. Unlawful and offenders may be prosecuted to the fullest extent of the law. Unlawful and offenders may be prosecuted to the fullest extent of the law. Unlawful and offenders may be prosecuted to the fullest extent of the law. Unlawful and offenders may be prosecuted to the fullest extent of the law. Unlawful and offenders may be proved to the full and offenders bodies are to be retained as specified. This document cannot be reproduced except in full, without prior written approval of the company. Any dispute arising out of this test report is subject to Ahmedabad jurisdiction.



Mahabal Enviro Engineers Pvt. Ltd.

PLOT NOS. 13,14,17,18, GRAMPANCHAYAT BOKHARA, CHHINDWARA ROAD, KORADI, NAGPUR, MAHARASHTRA, INDIA Phone: 0712-2612162/2612212 email: nagpur@mahabal.com



TEST REPORT

Report No.:	ME-NG07487-230429-SA- DCL-CHANDRAPUR	Date: 29.04.2023
ULR No.:	TC748723000006876F	1

Name and Address of Customer	DALMIA CEMENT (Naranda (Mines), N Chandrapur.	(BHARAT) LTD. Iaranda-Korpana Road,	PO No.: 4584000530/289 PO Date:-
Sample Description / Type	Ground water	Sample Collected by	Laboratory
Sampling Location	Naranda Lease Boundary	Sample Quantity / Packing	2L X 1 No. PVC Can 500 mL X 1 No. PVC Can 100 mL X 1 No. PVC Can 1 L X 1 No. Glass Bottle
Date of Sampling	22.04.2023	Date of Receipt of Sample	24.04.2023
Sampling Procedure	IS:3025(Part I):1987	' RA 2019; APHA 23 rd Ed. 20	17, 1060-B, 1-40;
Date of Start of Analysis	24.04.2023	Date of Completion of Analysis	29.04.2023

Sr. No.	Parameter	Unit	Result	Method Reference
	Discipline: Chemical Testing; Product Group: Water (Ground Water)			
1.	рН	-	6.9	APHA 23rd Ed. 2017, 4500-H+-B, 4-95
2.	Electrical Conductivity	μS/cm	944	APHA 23 rd Ed. 2017, 2510- B, 2-58
3.	Total Dissolved Solids	mg/L	545	IS 3025 (Part 16):1984 RA 2017
4.	Chloride (as CI)	mg/L	49.0	APHA 23rd Ed. 2017, 4500-CI-B, 4-75
5.	Alkalinity Total (as CaCO ₃)	mg/L	348	APHA 23 rd Ed. 2017, 2320-B, 2-36
6.	Total Hardness (as CaCO ₃)	mg/L	250	APHA 23rd Ed. 2017, 2340-C, 2-48

END OF REPORT

- Note: 1. BQL: Below Quantification Limit.
 - 2. LOQ: Limit of Quantification.
 - 3. The result listed refers only to the tested sample(s) and applicable parameter(s).
 - 4. This report is not to be reproduced except in full, without the written approval of the laboratory.
 - 5. Any complaint pertaining to the report can be addressed to mahabalreports@gmail.com

Page 1 of 1 QF/SALE/02 Issue No 03 Date 05.12.2019. Amd 01 Date 24.12.2022

Harish Mendhi Technical Manager Chemical Testing









5/6



DCBL/CA/Irr.Pen.River Agree/06-23/0010

cement! sugar! refractories! power!

Date: 28/06/2023

To,
The Executive Engineer
Chandrapur Irrigation Division,
Civil Lines,Chandrapur (M.S)

Sub:-Submission of Agreement for Approval.

Dear Sir,

Kindly refer your letter जा क्र 1661/राजस्व/मुरली बिगर सिंचन /2023., dtd.15.06.2023, according to the same and subsequent discussion with you,we are submitting the Agreement for your approval to draw the water from Penganga River for our Industrial and domestic purpose.

Please grant your approval for the Agreement and oblige. Thanking you.

Yours truly For Dalmia Cement (Bharat) Limited

Subbaraidu Ayyagari (Plant Head)

Encl:- 1) Agreement -5 sets (1 Original,4 Photo Copy)

- 2) MPCB Consent to Operate Plant (Photo Copy)
- 3) Company 7/12 (Photo Copy)
- 4) Company Layout Map (Photo Copy)
- 5) Memorandum of Articles Association (Photo Copy)
- (Photo Copy)
 - 7) Resolution Board of Directors (Photo Copy)
 - 8) Cheque Rs.1,23,442/- (Original Cheque No.160849, dtd. 17.06.2023)
 - 9) Letter for Chief Engineer, Nagpur (Photo Copy)

Dalmia Cement (Bharat) Limited

DALMIA CEMENT (BHARAT) LIMITED CHANDRAPUR CEMENT WORKS VILLAGE NARANDA

BETWEEN

WATER RESOURCE DEPARTMENT CHANDRAPUR

VALID FROM 1ST JULY 2023 TO 30TH JUNE 2028



महाराष्ट्र MAHARASHTRA

2022

BS 757958



AGREEMENT Stamp Rs.1000/-(For non-Irrigation water supply) 2 9 May 2003

An agreement made on the date of Two Thousand Twenty Three between Dalmia Cement (Bharat) Limited, Chandrapur Cement Works (formerly known as Murti Industries Ltd.) Village Naranda., Tehsil Koroana., Distt: Chandrapur 442916 and EXECUTIVE ENGINEER, IRRIGATION DIVISION CHANDRAPUR, NAGPUR ROAD, CIVIL LINES, CHANDRAPUR Local self Government body such as Gram panchayat, Municipal authorities, Zilla Parishad, Jeewan Pradhikaran or company and Industrial corporation (which expression hereinafter referred to as 'the company' shall, unless excluded by or it be repugnant to the context or meaning thereof be deemed to include its successors and assigns) registered under the Indian Companies Act, 1913 (VII of 1913), the companies Act, 1956(I of 1956) and having its registered Office at Dalmiapuram, District Tiruchirappalli - 621 651, (T.N), Indiahereinafter referred to as 'the company' of the one part and the Governor of Maharashtra hereinafter referred to as 'the Government' (which expression shall unless excluded by or it be repugnant to the context or meaning thereof be deemed to include his successors and assigns) of the other part.

For, Dalmia Cement (Bharat) Ltd.

CHANDRAPUR.

C: Documents and Senings Mule Desktop NI agreement Draft Reservoir sudharit- 2022.doc
Authorised Signatory

जोडपत्र-२ दस्ताना प्रकार/अनुच्छेद क्रमाक दस्त भौंदणी करणार अगहेत का ? नोंदणी होणार अस्ति। दय्यम निवध । अस्ति सचे नाव मिळकतीचे वाव मोबदला रक्कग मद्रांक विकत मेणाऱ्याचे नाव दसऱ्या पश्चकाराचे नाव **इस्ते असल्या**स त्याचे नांव व पत्ता मुद्रांक शुल्क रक्त मुद्रांक विको नोंद वर्री अनु.क. पदांक विकत प्रेणा-गांची सही बीमती मदाकिनी अ देशमृख, स्टॅम्प विक्रता, चद्रपूर

Whereas the company is desirous of constructing a pumping station on the company's land at Survey No. 131 Naranda, Village Dalmia Cement (Bharat) Limited(formerly known as Murli Industries Ltd.) for drawing water from the source(Penganga River)

(hereinafter referred to as "the said source") for the use by the company's----referred to as "the said Plant") and laying underground and surface pipes and drains for discharge of the

AND whereas the company has applied to the Government for permission to

Draw 2.50 Million Cum. of water per year from the said source.

AND whereas the company has paid Rs. Nill (Rupees------)to Government towards the proportional cost of capital out lay of the project.

AND whereas the Government has agreed to grant the aforesaid permission to the

Company on the terms and conditions hereinafter appearing.

AND WHEREAS UNDER the said terms and conditions the company has to deposit with the Executive Engineer, Chandrapur Irrigation Division, Chandrapur to the Government a sum of Rs.27,50,002/-as security equivalent to 2 Months company's probable annual water charges based on yearly sanctioned and as communicated. In cash or in the form of a bank Guarantee issued by a scheduled / nationalized bank having it's main/branch office situated locally for the due observance and performance by the company of the terms and conditions of this Agreement; AND WHEREAS the company has accordingly prior to the execution of these presents deposited with the Government Rs. 27,50,002/- as security for the due observance and performance by the company of the terms and conditions herein contained; AND WHEREAS it has been agreed that the saidamount will not carry any

CWIPHS AGREEMENT WITNESSTH AS FOLLOWS:

Nardada consideration of the company making payment to the Government as hereinafter specified observing and performing the convenience and conditions herein contained Government do hereby grants to the company permission to draw following quota of water for the specified For, Dalmia Cement (Bharat) Ltd.


C:\Document and Settings\Mule\Desktop\NI agreement Draft Reservoir sudharit- 2022chendraput | rigation Division Division



महाराष्ट्रं MAHARASHTRA

2022

BS 757959

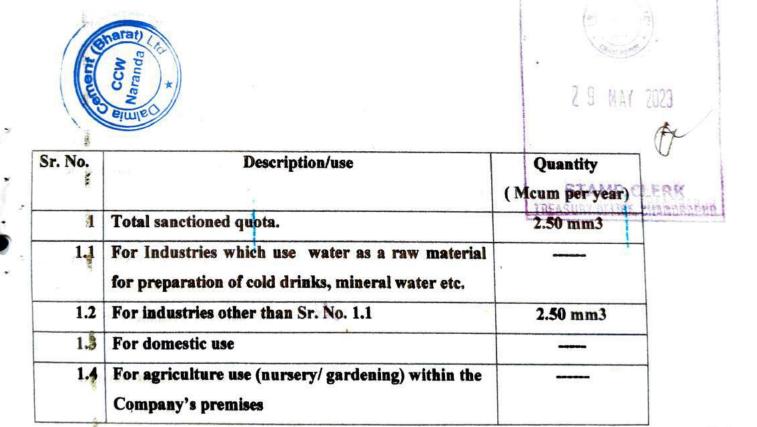


and use the same for the purpose of the Company's said plant or project and for supply to residential colonies for a term of Five years commencing from the------ On the following terms and conditions.

For, Dalmia Cement (Bharat) Ltd.

Chandrapur Irrigation Division

C:\Documents and Serings Mule\Desktop\NI agreement Draft Reservoir sudharit- 2022 doc
Authorised Signatory

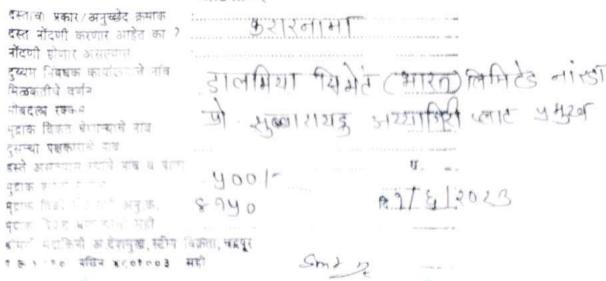

- (b) The Industrial water requirement as raw material and the Domestic water requirement of the company as demanded deemed to be separate and independent for the sole purpose and water charges assessment shall be accordingly separate and Independent for other clauses of this agreement.
- (c) Within the limits of permitted quota the company is permitted to give its phase wise water utilization schedule as an annexure to this Agreement. This phased water utilization scheduled will be on yearly basis. For this purpose year will start from 1st day of July.
- 2) The permission hereby granted shall be subject to the provision of the Maharashtra IrrigationAct. 1976, the Bombay Canal Rules 1934,MWRRA Act,2005 read with MWRRA (Amendments and Continuance) Act,2011 of 22/04/2011 and subsequent revisions, if any, in force and any executive orders issued in this behalf by Government and any statutory amendment thereof from time to time and for the time being in force.
- 3) Nothing herein contained shall be deemed to imply and guarantee on the part of the Government as to the availability or otherwise of any specific quantity of water and Government shall not be responsible for the non-supply or in adequate supply of water on any account whatsoever.

However in case of inadequate or non-supply due to shortage of water or reason beyond the control of the Department, bill shall be charged as per actual quantity of water supplied during such period.

4) The company shall use thewater drawn from the said Reservoir for purposes of the company's said ccW Plant and for supply to the residential colonies constructed by the company within the area of the said Plant for providing housing to its employees and workers (hereinafter referred to as "the said residentialColonies"). The company shall not sale the water from the said reservoir to any other person, film or company, corporation or other body. In the event of the company selling water C. Docate and Settings Mule Desktop NI agreement Draft Reservoir sudharit- 2022.doc Authorised Signators.

Executive Engineer.

Shendrapur Irrigetion Division.

CHAIDRAPUR.

drawn from the said river, then Government without prejudice to its right will forthwith revoke the license. Government shall be entitled to recover from the company the proceeds of any such sale made by the company.

As regards water supply to Penganga River Dalmia Cement (Bharat) Limited. Chandrapur Cement Works (formerly known as Murli Industries Ltd.) this clause of resale of water will not be applicable to the extent the water is supplied by them to the industrial units and residential colonels in their jurisdiction. But, for any purposes other than the above if —————Dalmia Cement (Bharat) Limited. Chandrapur Cement Works (formerly known as Murli Industries Ltd.) desires to supply the water then the prior permission of the Government in Irrigation Department is obligatory. Water supply made by —————Dalmia Cement (Bharat) Limited., Chandrapur Cement Works (formerly known as Murli Industries Ltd.) without prior permission will be charged at the maximum rates applicable for industrial water supply.

- 5) Government shall be entitled to utilize water of the said reservoir available after meeting the reasonable requirements of the company; as to which matter the decision of the Government shall be final and binding on the company, for such purpose as Government deem fit.
- 6) The permission hereby granted shall not in any manner prejudicially affect the existing water rights vested in the upstream riparian owners; nor shall it in any way, prejudice Government's right to here after launch or implement in public interest any new schemes of its own at, on or in connection with present source of channel of water supply available to the company, subject however to thesafe-guarding of its reasonable demand referred to in clause (5) above.
- (a) For ascertaining the quantity of water drawn by the companyDalmia Cement (Bharat) Limited., Chandrapur Cement Works(formerly known as Murli Industries Ltd.)shall forthwith at its own cost and after obtaining prior approval in writing thereto of the Executive Engineer, install independent pipelinesfitted with separate electronic water measuring devices for use of water for the said Independent intention (hereinafter referred to as "the said electronic measuring devices") at such places as is indicated by the Executive Engineer. All the pipeline layout from the said source shall be got approved from the Executive Engineer. No changes in the approved layout shall be made without the prior written approval from the Executive Engineer. In the event of the company failing to install and keep in proper working order the said electronic measuring devices for use of water for the said Plant and supply to the said residential colonies as aforesaid the company shall be liable to pay for the anctioned water quota. During such period 150% water charges will be charged at the prevailing covaries for the said plant. The said electronic measuring devices shall always be kept under the lock and

the Executive Engineer and the key of such lock shall at all times remain with the Executive

sineer. The company shall at all times, during the substance of this agreement at its own cost

For, Dalmia Cement (Bharat) Ltd.

Chendrapur I Agetion Division

Dodum his and Settings Mule Desktop NI agreement Draft Reservoir sudharit- 2022 document

- (b) Reading for the water so drawn by the company will be taken on the sold electronic measuring devices, on the Lastday of each month/at agreed times, Jointly by the authorized representatives of the Executive Engineer and of theDalmia Cement (Bharat) Limited.Chandrapur Cement Works(formerly known as Murli Industries Ltd.).
- (c) If at any time in the opinion of the Executive Engineer the said electronic measuring devices are found defective, the same shall be tested for its accuracy and the cost of such testing shall be borne and paid by the company. If on such testing the said electronic measuringdevices are found to be defective the company shall forthwith get the same repaired and set right at its own cost and in the event of company failing to do so within 30 (thirty) days thereafter the Executive Engineer may proceed to do so on account and at the cost of the company.
- (d) In the event of the said electronic measuring devices going out of order and becoming defective the quantity of water drawn by the company during the period when the meter was defective and not working shall be ascertained in the following manner.
- (I) If the said electronic measuring devices remain out of order for a period of less 30 days, then the quantity of water deemed to be drawn by the company during the said period, shall be calculated on proportionatebasis on 90% of the yearly sanctioned quantity as communicated in clause lor average for the last six months whicheveris higher.
- (II) If the said electronic measuring devices remain out of order for a period exceeding 30 days then the quantity of water deemed to be drawn by the company during the said period shall be deemed to be 150% of the sanctioned quota based on the phased requirement for that period or the monthly maximum during the previous six months whichever is higher. This will be made applicable for the period during which the measuring devices remained out of order.
- The aforesaid provisions will also apply when the quantity of water drawn by the company cannot be measured on account of removal of the said electronic measuring devices for repair or the same in the option of the Executive Engineer not working properly.
- 8) The Bill for the water drawn by the company during the previous calendar months shall be sent in duplicate/ triplicate by the Executive Engineer to the office of the company within 15 days after the end of the water consumption month. The company shall thereafter duly pay the same by a demand draft drawn in the same of the Executive Engineer, Chandrapur Irrigation Division Chandrapurfor and on behalf of the government within a fortnight from the date of receipt of the bill

shall not allow the same to fall in arrears. If the company fails to pay amount within this ccw stipped time (15 days from the date of receipt of the bill i.e. before the end of the current month) varance harge not exceeding 12% per annum of the amount due will be charged. If the delay in payment of water charges exceeds six months, the Government reserves the right to terminate the water supply

with a notice of 15 days in advance.

The cost of all works in connection with the arrangements for water supply including the cost of For, Dalmia Cement (Bhatat) Its installation and maintenance, shall be borne by the companies and its installation and maintenance, shall be borne by the companies and its installation and maintenance, shall be borne by the companies.

Authorised Signature Mule Desktop NI agreement Draft Reservoir sudharit- 2022 Chandrapur Irrigation Di

10) Subject to the provisions of clause (7) hereof, the company shall pay to the Government at the time and in the manner specified in clause (11) hereof water charges for the quantity of water drawn by the company form the said reservoir as measured by the said electronic measuring devices at the rates notified by Government time to time.

I.In case, actual water use happens to be less than 90% of the phase-wise planned quantity of water, the billing shall be done on the 90 % of the quantity of water specified in the Agreement, If the actual water use is between 90 % to 100% of the corresponding phase-wise water use: billing shall be made as per the standard rate

II. For water use more than 100% & less than 150% of sanctioned quota, water charges will be 1.50 times of AR and beyond 150% of sanctioned quota, water charges will be 3.0 times of AR

III.In addition to above, commitmentcharges at 5% of applicable charges, shall be payable on sanctioned quota less agreed phased quota of water.

IV. In addition to the payment of water charges referred to above the company shall also pay to the Government local funds cess at the rate of 20 paisa per every rupee of water charges.

- 11)(a) The company shall pay to the Executive Engineer, water rates and local fund cess either in advance every month on the basis of anticipated quantum of water to be drawn by it from the said source during the month or on monthly basis within fifteen (15) days from the date of receipt of the month demands by the company from the Executive Engineer. On default of the company to pay the water rate or localcess as aforesaid vide clause 8 and 10, Government shall without prejudice to its any other rights and remedies be entitled to terminate this agreement forthwith as per clause no. 8.
 - (b) In the case of disputes regarding quantity of water billed or rate at which the bill is prepared the Company/ firm/ individual water user shall first pay the complete amount of the bill and then claim for refund of any excess bill charged giving the reasons justification of wrong billing. However the decision of Superintending Engineer, Chandrapur Irrigation Circle Chandrapur, in this regard shall be final and binding on the Company.

Government hereby reserves to itself the right to revise from time to time the water rates and local and cess and company shall pay the revised water rates and local fund cess as may be fixed by overnment from time to time. Naranda

The company shall discharge the effluent only after treatment to desired standards of Maharashtra Pollution Control Board (MPCB). Company shall get its effluent examined from MPCB and For, Dalmia Cement (Bharat) Ltd.
submit the certificate of MPCB to Executive Engineer quarterly. The company will the certificate of MPCB to Executive Engineer quarterly.

CCW

Documents and Settings Mule Desktop NI agreement Draft Reservoir sudharit- 2022.doc Authorised Signatory

applicable rates only if it regularly submit the certificate of MPCB stating that effluent meets the MPCB standards.

If the company fails to submit MPCB certificate or effluent does not meet MPCB standards than 5% penal charges will be applicable for next 3 months. And at the end of three months water supply will be closed.

Government also reserves the right to call for list of water polluting companies. If Governmentfounds that effluent of the company is not meeting MPCB standards, then Government will give three months notice to company to cure the default. During this cure period company will be charged at rates twice the applicable rates. And if company fails to cure the default the water supply will be stopped at the end of 3 months.

If an industry adopts Zero Liquid Discharge (ZLD) technology and draws only up to 25% of its allocation to cover pipeline loss, evaporation and process consumption, it will be charged only at 25%. Of the applicable rate for the water drawn. However, this concession will be applicable to those industries who reduce its annual sanctioned water demand up to minimum 75% or less. It will be mandatory to ascertain and certify this by the officer not below rank of Executive Engineer

- The effluent disposal arrangement made by the company shall be got approved by the Company 14) from the Maharashtra Pollution Control Board/Environmental Department of the Government prior to commencing the operation of pumping/drawing water from the source.
- The company shall at all the times allow an officer of Water Resources Department of the 15) Government or authorised in that behalf to inspect the said works as well as accounts and copies taken of entries from the records maintained by the company.
- Any notice or other documents to be given to or served upon the company may be given or served 16) on behalf of the Government by the Executive Engineer, Chandrapur Irrigation Division Chandrapur and any such notice or document shall be deemed to have been duly given to or served upon the company or sent by registered post to the registered company if it is delivered at the registered office of the company or sent by registered post to the registered address for the time being of the company.
- 17) The said sum of Rs. 27,50,002/- (-) Rs. 26,26,560= Rs.1,23,442/-deposited in the Chequeno.160849 dtd.17/06/2023 issued by State bank of India by the company with the Executive Engineer, Chandrapur Irrigation Division Chandrapur -to the government as foresaid shall be held by the Government as security for the due observance and performance by company of the covenants, terms and conditions herein contained. In case of default on the Naranda art of the company to perform and observe any of the said covenants and conditions it shall be

Certainful for the Government in his absolute discretion to forfeit the whole of the security deposit or any part thereof without prejudice nevertheless to any rights and remedies which the povernment sufficiences and Settings Mule Desktop NI agreement Draft Reservoir sudharit- 2022

may have against the company under these presents for such breach and the company shall forthwith pay up the amount so forfeited and shall always maintain the original amount of deposit throughout the period of this agreement. On the expiry of the terms of this agreement, the said security deposit of Rs.27,50,002/-,or such part thereof as shall not have been appropriated as aforesaid shall be refund to the company.

- All amounts due to the Government by the company under this agreement shall be deemed to be arrears of land revenue and may without prejudice to any other rights and remedies of the Government be recovered from the company as arrears of land revenue.
- On the expiry of the term of this agreement, Government may renew this agreement within 90 days for such further period and on such terms and conditions, as Government may at its absolute discretion deem fit.
- The costs incurred in the execution of the Incidental charges for this agreement including stamp duty shall be borne and paid by company.
- The agreement supersedes all the previous agreements entered into by the company with the Government in connection with the supply of water from Penganga River.
- 22) IF THE COMPANY COMMITS A BREACH OF ANY OF THE TERMS AND CONDITION THEREOF GOVERNMENT SHALL BE ENTITLED TO CANCEL THIS PERMISSION AND DISCONTINUE THE SUPPLY OF WATER WITHOUT PAYMENT OF ANY COMPENSATION WHATSOEVER TO THE COMPANY.
- The Government hereby reserves to itself its right to change/ amend/ modify/ cancel/revise any of the terms and conditions, rules and regulations of water management and Maharashtra Irrigation Act. And rules laid under them which shall be applicable for this agreement.

CCW Naranda

For, Dalmia Cement (Bharat) Ltd.

Authorised Signatory

Executive Engineer.

Changrapur Prigation Division
CHANDRAPUR,

C. Documents and Settings Mule Desktop NI agreement Draft. Reservoir sudharit, 2022 de

IN WITNESS WHEREOF THE Common Seal of the Dalmia Cement (Bharat) Limited.,
Chandrapur Cement Works(formerly known as Murli Industries Ltd.)., Village Naranda., Tehsil
Korpana., Distt. Chandrapur -442916 has been hereof affixed Subbaraidu Ayyagari (Plant Head)
AND the Executive Engineer, Chandrapur Irrigation Division Chandrapur, has for and on behalf
of the Governor of Maharashtra hereto set his hand and affixed the seal of his Office the day and year
first herein above written. THE COMMON SEAL OF DALMIA CEMENT (BHARAT)
LIMITED(formerly known as Murli Industries Ltd.)
Was pursuant to a resolution
Of the Board of Directors of
The company dated the
Hereto affixed in the presence offor Dalmia Cement (Bharat) Limited
1.
2. (Unit Head)
Two Direction of the company who in taken thereof have set their respective hands in the presence of 1. (Areund Than)
2
SIGNED, SEALED AND DELIVERED by the Executive Engineer, Chandrapur Irrigation Division for and on behalf of the Governor of Maharashtra in the presence of
2,Executive Engineer
(Chandrapur Irrigation Division) Chandrapur

For, Dalmia Cement (Bharat) Ltd

Authorised Signatory

ANNEXURE-XV AMBIENT AIR QUALITY IN CORE AND BUFFER ZONE

AMBIENT AIR QUALITY IN CORE ZONE

Month	PM 2.5	PM 10	S02	NO2	CO		
	(μg/m3)	(μg/m3)	(µg/m3)	(µg/m3)	(mg/m3)		
Standard	60.0	100.0	80.0	80.0	4.0		
AAQMS-1: Near Exp							
Oct-23	32.5	56.2	14.99	19.62	1.11		
Nov-23	35.4	58.3	15.72	21.15	1.14		
Dec-23	31.7	60.2	10.84	15.31	1.15		
Jan-24	33.7	64.4	14.88	18.73	1.1		
Feb-24	33.3	64.0	13.12	17.49	1.11		
Mar-24	35.0	69.1	16.41	20.74	1.12		
AAQMS-2 : Near Min							
Oct-23	32.9	56.6	13.4	21.3	1.13		
Nov-23	34.6	57.5	14.4	23.0	1.13		
Dec-23	38.7	63.1	11.4	17.7	1.2		
Jan-24	35.0	62.1	12.7	17.2	1.13		
Feb-24	34.6	65.4	14.3	20.5	1.11		
Mar-24	37.5	69.8	18.2	23.5	1.1		
AAQMS-3 :Near Old	Working Area						
Oct-23	30.4	52.5	14.1	19.4	1.13		
Nov-23	35.4	54.2	16.5	21.1	1.12		
Dec-23	32.9	63.2	10.8	19.4	1.1		
Jan-24	33.7	65.2	13.1	17.9	1.07		
Feb-24	32.9	65.9	12.3	22.0	1.08		
Mar-24	36.7	68.3	15.2	25.7	1.07		
AAQMS-4: Old Was	AAQMS-4 : Old Waste Dump Area						
Oct-23	31.7	55.4	13.6	19.9	1.13		
Nov-23	33.7	57.0	15.9	22.0	1.11		
Dec-23	37.1	58.6	13.3	18.4	1.15		
Jan-24	32.5	60.3	13.1	18.3	1.08		
Feb-24	35.4	61.6	13.8	19.4	1.09		
Mar-24	37.9	64.4	16.5	23.1	1.09		

ANNEXURE-XV AMBIENT AIR QUALITY IN CORE AND BUFFER ZONE

AMBIENT AIR QUALITY IN BUFFER ZONE

Month	PM 2.5 (μg/m3)	PM 10 (μg/m3)	SO2 (μg/m3)	NO2 (μg/m3)			
Standard	60.0	100.0	80.0	80.0			
Location :- Near Naranda Village							
Oct-23	31.24	54.26	12.48	20.78			
Nov-23	32.49	55.82	13.68	21.69			
Dec-23	28.74	51.74	11.15	19.51			
Jan-24	29.58	54.68	11.21	19.27			
Feb-24	26.24	52.79	10.73	19.15			
Mar-24	30.41	55.24	12.62	22.03			
Location:- Antarga	Location:- Antargao Village						
Oct-23	28.3	50.5	12.1	16.7			
Nov-23	32.1	52.2	14.7	18.2			
Dec-23	23.1	63.0	10.2	17.3			
Jan-24	31.2	60.1	11.6	17.6			
Feb-24	28.3	57.1	11.1	20.1			
Mar-24	32.07	60.29	14.93	22.03			
Location:- Near Va	Location:- Near Vanoja Village						
Oct-23	29.2	54.4	14.8	17.4			
Nov-23	31.7	55.3	13.3	18.2			
Dec-23	34.6	55.4	8.7	15.7			
Jan-24	27.5	53.1	10.6	16.3			
Feb-24	27.5	53.7	10.3	20.0			
Mar-24	30.8	56.2	13.8	22.8			
Location:- Near Va	Location:- Near Vansadi Village						
Oct-23	30.8	49.5	11.3	17.9			
Nov-23	31.2	54.6	12.1	19.1			
Dec-23	27.5	53.0	10.2	16.8			
Jan-24	28.7	54.4	12.0	15.7			
Feb-24	29.6	51.0	10.3	21.5			
Mar-24	32.91	53.93	13.65	23.5			

ANNEXURE-XVI

YEAR WISE EXPENDITURE TOWARDS ENVIRONMENTAL PROTECTION

SN	Activity	Expenditures (In Lakhs)		
		2021-22	2022-23	2023-24
1	Operation and Maintenance of Air Pollution Control Equipment	11.29	10.6	4.8
2	Fugitive Dust Emission Control Measures	10.6	6.5	6.54
3	Installation of Environment Monitoring Equipment - CAAQMS	55		-
4	Environment Monitoring & Studies	4.422	5.11	12.45
5	Environmental Awareness Programmes	1.5	1.5	1.5
6	Greenbelt Development & Plantation	2.504	6.57	9.31
	Sub Total	85.316	30.28	34.6
	Grand Total	150.196		

Sr. No.	Activity	Expenditure (In Lakhs)	Expenditure (In Lakhs)
1101		(April-23 to Sep-23)	(Oct-23 to Mar-24)
1	Operation and Maintenance of Air Pollution Control Equipment	2.4	2.4
2	Fugitive Dust Emission Control Measures	3	3.54-
3	Environment Monitoring & Studies	2.85	9.6
4	Plantation & Greenbelt Development	4.51	4.8
5	Environmental Awareness Programmes	0	1.5
	Sub Total	12.76	21.84
	Total	34.6	